

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 12A
2. Withstanding voltage : AC1600V/1Min.
3. Wire range : 28~14AWG

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	320V	200V	200V
Rate current(A)			17.5A

2. Wire range : 0.2~1.5mm²

NOTES2:






1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 3.50mm, Poles : N=02~24P
3. Stripping length : 8~9mm
4. Operating temperature: -40°C~+130°C
5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range			In mm
	Over	Over	Over	
6 TO 10	10	30	60	0.1/10
10 TO 24	24	60	100	∠
24 TO 30	30	60	150	∠
30 TO 60	60	100	150	∠
60 TO 100	100	150	150	∠
100 TO 150	150	150	150	∠

6. RoHS Compliance

Ordering Information

JL212V-350 XX B 0 1

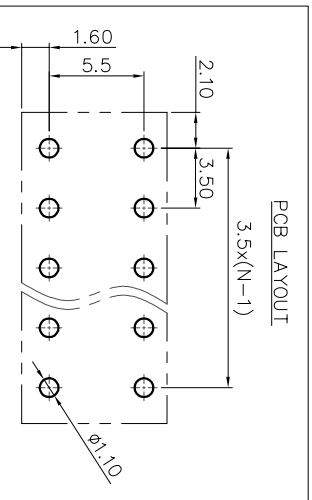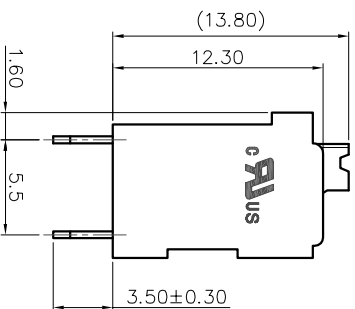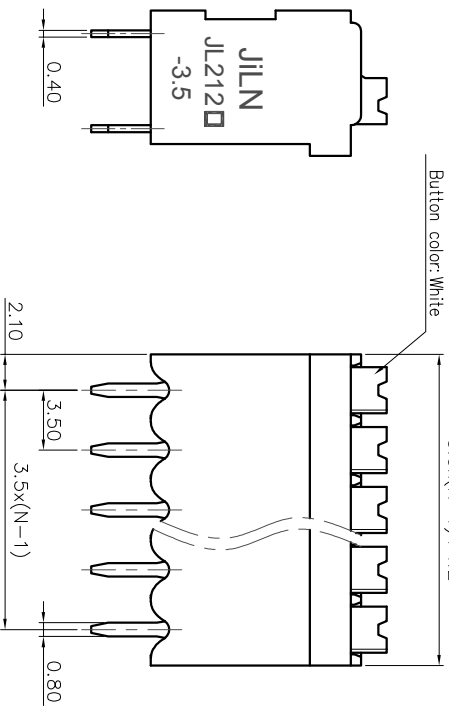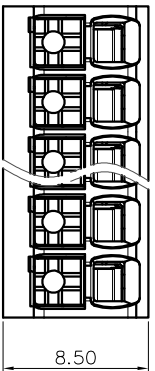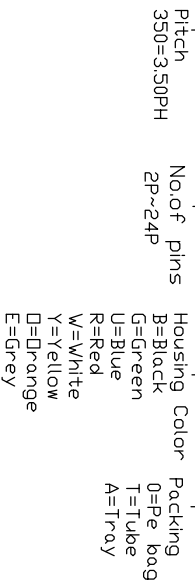

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.10.14

DRAW	SHUANGPING ZHENG		SCALE	FIT	PART NO.	JILIN® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD
	CHECK	LICHAD LIU	UNIT	mm		
APPROVE	YONGLIANG GAO	SIZE	A4	SHEET	JL212V-350XXB01	
		PRDJ	1/1		TITLE:	JL212V-THR-3.5-XXP 弹簧式/直脚/双排/黑色

JILIN® 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO., LTD

PART NO. JL212V-350XXB01

TITLE: JL212V-THR-3.5-XXP 弹簧式/直脚/双排/黑色

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[MBE-1512](#) [MBE-1520](#) [MBE-154](#) [MBE-156](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-163](#) [MI-254 \(35\)](#) [MPT-275](#) [ELM10110G](#) [BA311TU](#)
[BA411SU](#) [MV-254-D](#) [MV-255](#) [MV-493](#) [MVE-252](#) [MVE-253](#) [MVEB-153](#) [1705142](#) [1-796689-8](#) [1841320000](#) [S451](#) [29.007](#) [29.116](#) [30.204](#)
[30.503](#) [30.756](#) [30.853](#) [9872-0-00-15-00-00-33-0](#) [996750](#) [1710052](#) [20020316-G071B01LF](#) [20020327-C061B01LF](#) [29590](#) [30.652](#) [30.710](#)
[30.754](#) [30.757](#) [32.058](#) [37.206](#) [37.208](#) [37.507](#) [37.558](#) [38331-5812](#) [38331-8018](#) [38540-1910](#) [39.002](#) [MBE-1517](#) [MBE-153](#)