

SPECIFICATIONS
 Rated (額定参数): 300V, 8A
 Dielectric strength (抗电强度): AC2000V/1 Minute
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Contact Resistance (接触电阻): 20mΩ Max
 Wire Range (线径): 22~16AWG
 Strip length (剥线长度): 8.5~9.5mm
 Temp. range (操作温度): -40℃~+105℃
 MAX Soldering (瞬时温度): +250℃, 5s

Housing Material (塑件): PA66 (UL94 V-0)
 Contact (端子): Brass, Tin plating (黄铜镀锡)


PITCH RANGE		NOMINAL DIMENSION RANGE					
IN MM		IN MM					
±0.10	TO	±0.15	TO	±0.25	TO	±0.30	TO
±0.10	6	±0.15	10	±0.25	24	±0.30	30
±0.10	TO	±0.15	TO	±0.25	TO	±0.30	TO
±0.10	OVER	±0.15	OVER	±0.25	OVER	±0.30	OVER
±0.10	150	±0.15	100	±0.25	60	±0.30	30
±0.10	TO	±0.15	TO	±0.25	TO	±0.30	TO
±0.10	150	±0.15	100	±0.25	60	±0.30	30

Ordering Information


JL250 A - 350 XX X X 1

A=A-Type
 B=B-Type
 PITCH 350=3.5PH
 No. of pins 2~24P
 Housing Color
 Packing
 A=Tray
 T=Tube
 O=Fe bag
 0=Fe bag
 B=Black
 C=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 E=Grey



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

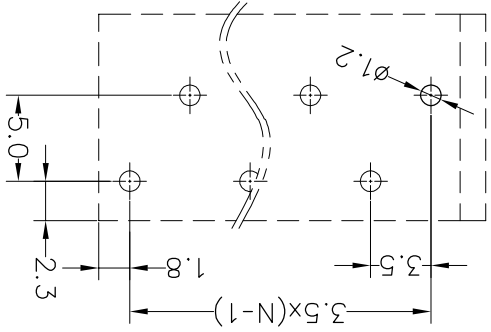

A-Type

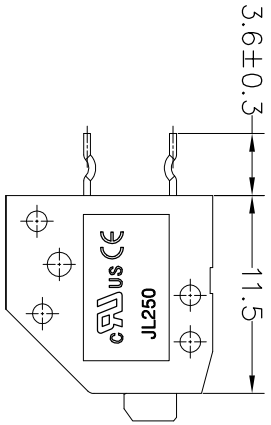

First Poles

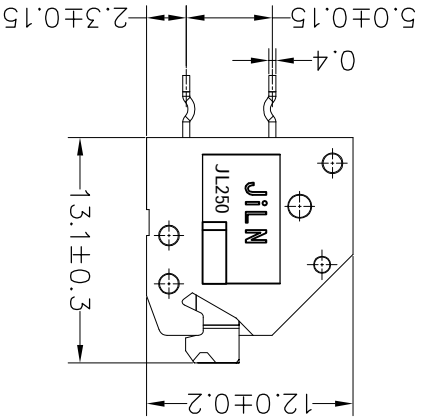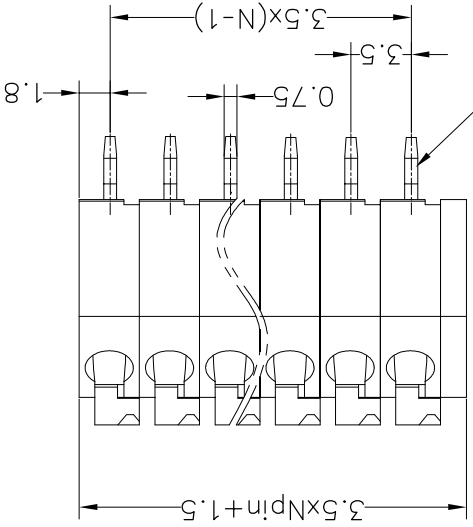

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM		TOL	APPROVE	DRAW	SCALE	FIT	UNIT	SIZE	SHEET	PROJ.	TITLE:
				Angle	±										
A0	2019.07.16	NEW DRAWING		X.XXX	±	±0.10		Yiyusheng	19.07.16	mm	A4	1/1			3.5mm Spring Terminal Blocks
				X.XX		±0.20	CHECK								JL250A-350XXXXX1
				X.X		±0.30	DRAW								

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[00175550202](#) [MBE-1512](#) [MBE-1520](#) [MBE-154](#) [MBE-156](#) [MBES-1510](#) [MBES-153](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-133](#) [MHE-163](#)
[MI-254 \(35\)](#) [MI-272](#) [8739](#) [880507](#) [880508](#) [MPT-275](#) [1546551-6](#) [ELM023100](#) [ELM10110G](#) [ELVD12100](#) [BA311TU](#) [BA411SU](#) [MV-152](#)
[MV-253/NCNOC](#) [MV-254-D](#) [MV-255](#) [MV-462](#) [MV-472](#) [MV-493](#) [MVE-252](#) [MVE-253](#) [MVE-258](#) [MVE-273](#) [MVEB-153](#) [1700096](#)
[1702246](#) [1705142](#) [1712417](#) [1713020](#) [1713088](#) [1776118-2](#) [1790852](#) [1-796689-8](#) [1-796692-6](#) [1800001](#) [1800114](#) [1823215](#) [1838462](#)