

NOTES1:

- UL Standard
- 1. Rated voltage/current : 300V / 20A
- 2. Withstanding voltage : AC1600V/1min.
- 3. Wire range : 24~12AWG

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	4KV	4KV	4KV
Rate voltage(V)	630V	400V	250V
Rate current(A)	24A		

2. Wire range : 0.2~2.5mm²/4mm²(sol)

NOTES2:







- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 5.00mm, Poles : N=01~24P
- 3. Stripping length : 10mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm		Over		Over		Over	
Over	TO	Over	TO	Over	TO	Over	TO	Over	TO
6	10	30	60	100	150	0.1	1/10		
10	24	30	60	100	150			≤	
±0.15		±0.20		±0.30		±0.50		±0.70	
								±1.00	
								±2°	

6. RoHS Compliance

Ordering Information

JL271V - 500 XX G 0 1

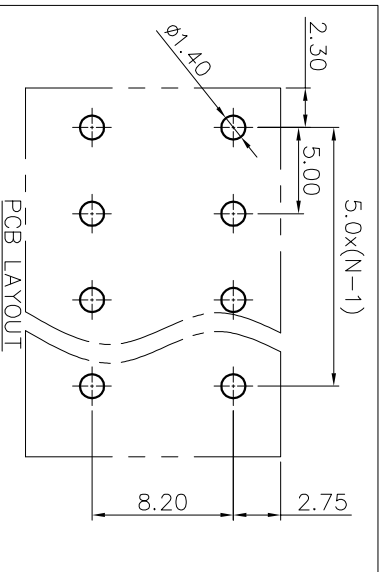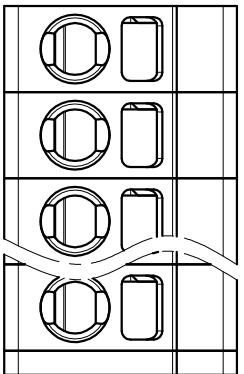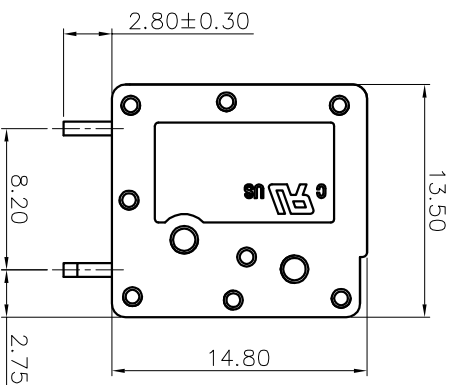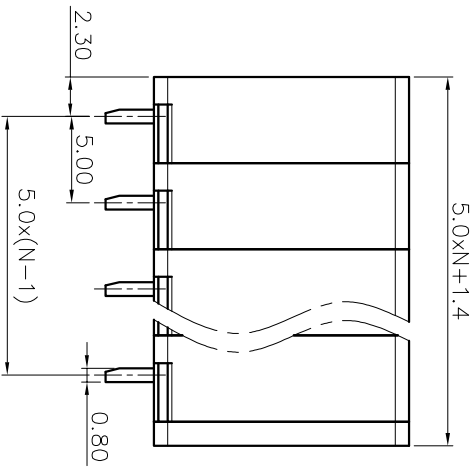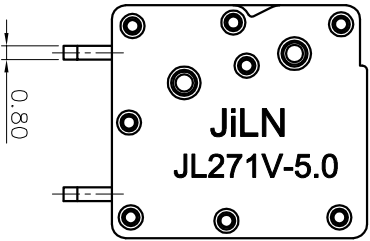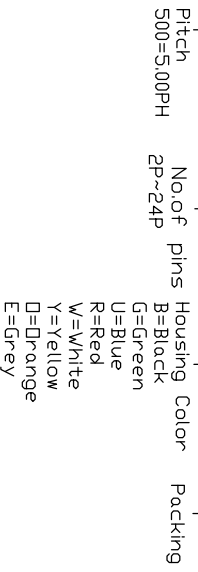

DRAW	SHUANGPING ZHENG		SCALE	FIT	PART NO.	JL271V-500XXG01
	UNIT	mm	UNIT	mm		
CHECK	LICHAD LIU		SIZE	A4	TITLE:	JL271V-5.0-XXP 弹簧式/直脚/双排/绿色
	SHEET	1/1				
APPROVE	YONGLIANG GAO		PRD			

REVISION RECORD			
REV	ECN	DESCRIPTION	DATE
A0		NEW	21.06.30

JILIN 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO., LTD

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[MBE-1512](#) [MBE-1520](#) [MBE-154](#) [MBE-156](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-163](#) [MI-254 \(35\)](#) [MI-272](#) [MPT-275](#) [ELM10110G](#)
[BA311TU](#) [BA411SU](#) [MV-253/NCNOC](#) [MV-254-D](#) [MV-255](#) [MV-493](#) [MVE-252](#) [MVE-253](#) [MVE-273](#) [MVEB-153](#) [1700096](#) [1705142](#)
[1712417](#) [1713088](#) [1745195](#) [1760594](#) [1-796689-8](#) [1-796692-6](#) [1800114](#) [20020314-C121B01LF](#) [20020316-G041B01LF](#) [KP03215000J0G](#)
[KP04215000J0G](#) [S451](#) [29.007](#) [29.116](#) [30.103](#) [30.106](#) [30.503](#) [30.608](#) [30.755](#) [30.756](#) [30.853](#) [9872-0-00-15-00-00-33-0](#) [996750](#) [1706303](#)
[1710052](#) [1712418](#)