

| REVISION RECORD | | | | |
|-----------------|-----|-------------|------|------------|
| REV | ECN | DESCRIPTION | DRFT | DATE |
| A0 | | NEW | | 2023.09.01 |

NOTES1:
 UL Standard
 1. Rated voltage/current : 300V / 10A
 2. Withstanding voltage : AC2000V/1Min.
 3. Wire range : 26~12AWG

IEC Standard

1.

| Pollution degree | 2 | 2 | 3 |
|--------------------------|-------|------|------|
| Overvoltage category | II | III | III |
| Rate impulse voltage(KV) | 6KV | 4KV | 4KV |
| Rate voltage(V) | 1000V | 400V | 400V |
| Rate current(A) | 20A | | |

2. Wire range : 0.2~2.5mm²

NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 7.62mm, Poles : N=02~24P
 3. Torque value : M2.5, 3.54Lb.in
 4. Stripping length : 9~10mm
 5. Operating temperature: -40°C~+105°C
 6. Undimensioned tolerances:







| Pitch range in mm | | Nominal dimension range in mm | | | | | | 0.1/10 |
|-------------------|-------|-------------------------------|-------|-------|-------|-------|-------|--------|
| TO | Over | TO | Over | TO | Over | TO | Over | |
| 6 | 10 | 24 | 30 | 60 | 100 | 150 | 150 | |
| ±0.15 | ±0.20 | ±0.30 | ±0.30 | ±0.50 | ±0.70 | ±1.00 | ±1.30 | |
| | | | | | | | ±2' | |

7. RoHS Compliance

Ordering Information

JL 2EDGKD - 762 XX X XX

Pitch: 762=7.62PH
 No. of pins: 2~24
 Housing Color: B=Black, G=Green, U=Blue, R=Red, W=White, Y=Yellow, O=Orange, E=Grey
 Serial code

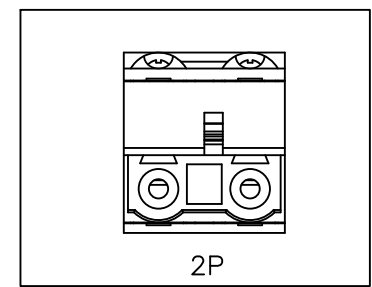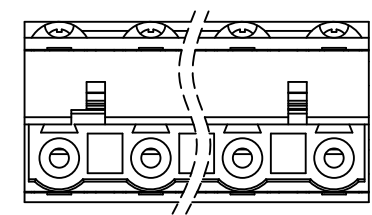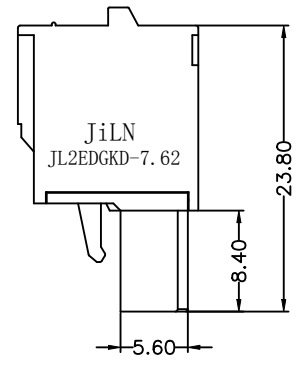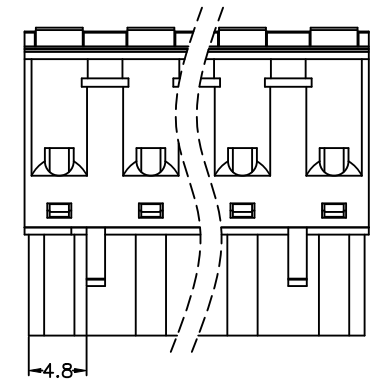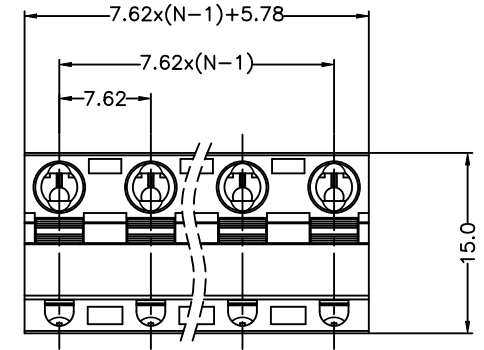

| | | | | |
|---------|-------|-----|---|------------------------|
| DRAW | SCALE | FIT | 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD | |
| | | | | |
| CHECK | SIZE | A4 | PART NO. | JL2EDGKD-762XXXXX |
| | | | TITLE: | JL2EDGKD-7.62-XXP插拔式母座 |
| APPROVE | SHEET | 1/1 | | |
| | PROJ. | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [721-104/026-047](#) [721-204/026-045](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#)
[93.731.4953.0](#) [PVP03-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#)
[ELVD12100](#) [ELVF09400](#) [ELXH071G0E](#) [1725220000](#) [1760336](#) [1855000000](#) [19346](#) [1946309](#) [1973592](#) [19892](#) [25.320.4053.1](#) [25.320.4553.9](#)
[25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-](#)
[5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [PHP09-5,08](#) [25.193.0453.0](#) [25.320.4653.1](#) [25.332.2453.1](#)