


SPECIFICATIONS

Rated (额定参数): 300V, 15A
 Dielectric strength (抗电强度): AC2000V/1 Minute
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Contact Resistance (接触电阻): 20mΩ Max
 Screw Torque (扭矩): 0.4Nm (3.5Lb.in)
 Wire Range (线径): 12~28AWG
 Strip length (剥线长度): 7~8mm
 Temp. range (操作温度): -40℃~+105℃
 MAX Soldering (瞬时温度): +250℃, 5s

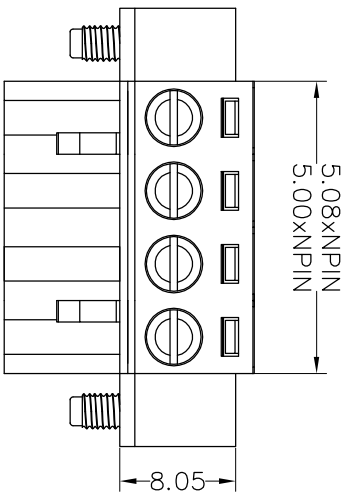



Housing Material (塑件): PA66 (UL94 V-0)
 Contact (端子): Phosphor Bronze, Tin plating (磷铜镀锡)
 Clamp (方块): Brass/Steel (铜/铁), Ni plating (镀镍)
 Screw (螺丝): Steel, Zinc plating (钢, 镀锌)

PITCH RANGE		NOMINAL DIMENSION RANGE	
IN MM	OVER	IN MM	OVER
TO 6	10	30	60
TO 10	24	TO 30	TO 60
TO 15	30	TO 60	TO 100
TO 20	30	TO 60	TO 150
TO 25	30	TO 60	TO 150
TO 30	30	TO 60	TO 150
TO 35	30	TO 60	TO 150
TO 40	30	TO 60	TO 150
TO 45	30	TO 60	TO 150
TO 50	30	TO 60	TO 150
TO 55	30	TO 60	TO 150
TO 60	30	TO 60	TO 150

Ordering Information

JL2EDGKM-XXX XX G X 1

Pitch
 500=5.00PH
 508=5.08PH
 No. of pins
 2P~20P
 Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 E=Grey
 Packing
 0=Pe bog
 T=Tube
 A=Troy

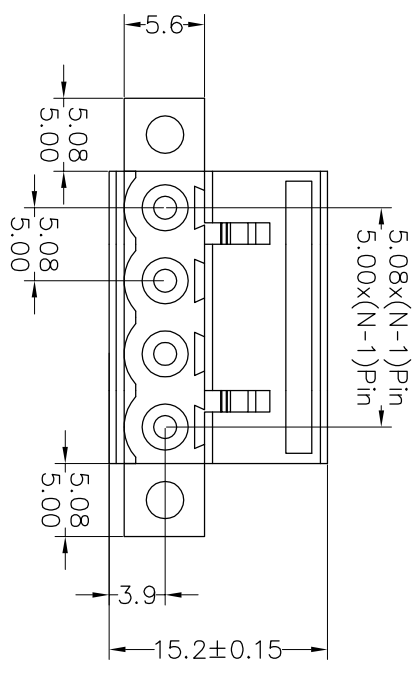

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	SCALE	FIT	PROU.	PART NO.	TITLE:
A0	2017.01.05	NEW DRAWING		Angle	±3°	CHECK	UNIT	A4	1/1	JL2EDGKM-XXXXXXG1	5.00/5.08 Pitch Female Plugqable Termindl Blocks
1			CHANGE			APPROVE	mm	1/1			

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[57.404.7553](#) [57.504.0053.7](#) [57.510.0053](#) [57.910.6153](#) [01.112.1453](#) [CTB932VE/6](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [734-304](#) [8-141-P](#) [FKCT 2.5/ 3-ST KMGY](#) [860505](#) [860508](#) [860516](#) [860810](#) [861908](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP02-5,00](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [H-10](#) [ELFH09150](#) [ELFH16150](#) [ELFP03110](#) [ELFT06250](#) [ELFT07250](#) [ELVF09400](#) [ELVP03100](#) [ELXH03100](#) [ELXH071G0E](#) [ELXP041G0](#) [ELXT046G0](#) [1700101](#) [1700410](#) [1700425](#) [1703176](#) [1703243](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1729386](#) [1734692](#) [1734795](#)