

NOTES1:

- UL Standard
- 1. Rated voltage/current : 300V / 10A
- 2. Withstanding voltage : AC1600V/1Min.

IEC Standard

|                          |      |      |      |
|--------------------------|------|------|------|
| 1. Pollution degree      | 2    | 2    | 3    |
| Overvoltage category     | II   | III  | III  |
| Rate Impulse voltage(KV) | 4KV  | 4KV  | 4KV  |
| Rate voltage(V)          | 630V | 400V | 250V |
| Rate current(A)          | 8A   |      |      |

NOTES2:







- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 5.08mm, Poles : N=04~36P
- 3. Operating temperature: -40°C~+120°C
- 4. Undimensioned tolerances:

| Pitch range in mm                               | Nominal dimension range |       | Tolerance |
|---|-------------------------|-------|-----------|
|   | Over                    | In mm |           |
| 6   | TO                      | 30    | 0.1/10    |
| 10  | TO                      | 60    | TO        |
| 24  | TO                      | 100   | TO        |
| 30  | TO                      | 150   | TO        |
| 60  | TO                      | 100   | TO        |
| 150   | TO                      | 150   | TO        |
| ±0.15/±0.20/±0.30/±0.30/±0.50/±0.70/±1.00/±1.30 |                         |       | ±2°       |

5. RoHS Compliance

Ordering Information

JL2EDGVHC - 508 XX B 0 1

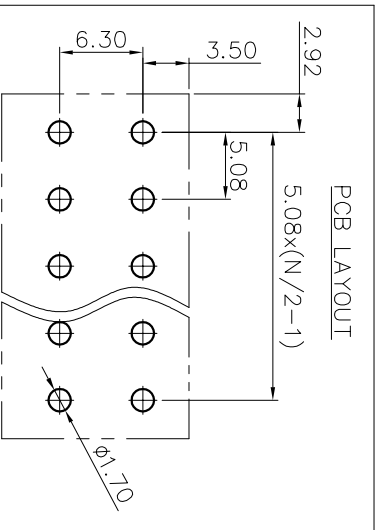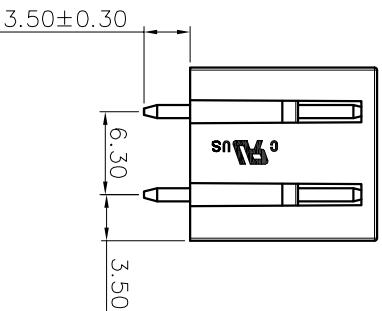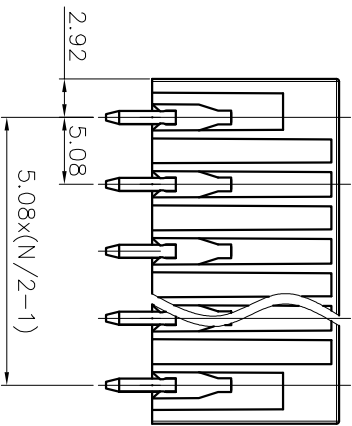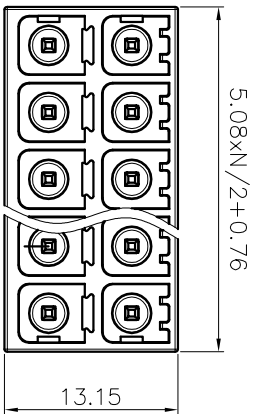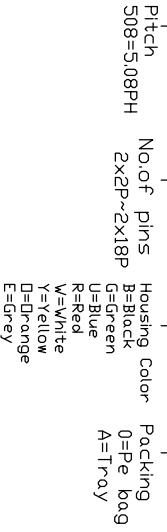

| REVISION RECORD |     |             |      |
|-----------------|-----|-------------|------|
| REV             | ECN | DESCRIPTION | DATE |
|                 |     |             |      |

|         |                  |     |       |     |          |                                    |
|---------|------------------|-----|-------|-----|----------|------------------------------------|
| DRAW    | SHUANGPING ZHENG |     | SCALE | FIT | PART NO. | JL2EDGVHC-508XXB01                 |
|         | UNIT             | mm  |       |     |          |                                    |
| CHECK   | LICHAD LIU       |     | SIZE  | A4  | TITLE:   | JL2EDGVHC-THR-5.08-2XN 插拔式公座/直脚/黑色 |
|         | SHEET            | 1/1 |       |     |          |                                    |
| APPROVE | YONGLIANG GAO    | PRD |       |     |          |                                    |

**JiLN** 东莞市锦凌电子有限公司  
DONGGUAN JINLING ELECTRONIC CO., LTD

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [JILN](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [721-104/026-047](#) [721-204/026-045](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#)  
[93.731.4953.0](#) [PVP03-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#)  
[ELVD12100](#) [ELVF09400](#) [ELXH071G0E](#) [1725220000](#) [1760336](#) [1855000000](#) [19346](#) [1946309](#) [1973592](#) [19892](#) [25.320.4053.1](#) [25.320.4553.9](#)  
[25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-](#)  
[5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [PHP09-5,08](#) [25.193.0453.0](#) [25.320.4653.1](#) [25.332.2453.1](#)