

HSF RoHS

SPECIFICATIONS

Rated(额定参数): 150V,6A
 Dielectric strength(抗电强度): AC1500V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Screw Torque(扭矩): 0.10Nm (0.89Lb.in)
 Wire Range(线径):26~18AWG
 Strip length(剥线长度):3.7~4.7mm
 Temp. range(操作温度): -40℃~+105℃
 MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PA66 (UL94 V-0)
 Contact(端子): Brass, Tin plating(黄铜镀锡)
 Clamp(方块): Brass/Steel(铜/铁), Ni plating(镀镍)
 Screw (螺丝): M1.6, Steel, Zinc plating(钢,镀锌)

| PITCH RANGE IN MM | | | NOMINAL DIMENSION RANGE IN MM | | | | |
|----------------------|-----------------------|------------------------|----------------------------------|------------------------|-------------------------|--------------------------|-------------|
| TO 6 | OVER 6 TO 10 | OVER 10 TO 24 | TO 30 | OVER 30 TO 60 | OVER 60 TO 100 | OVER 100 TO 150 | OVER 150 |
| ±0.10 | ±0.15 | ±0.25 | ±0.30 | ±0.30 | ±0.50 | ±0.70 | ±1.00 |

Ordering Information

JL 308 - 254 XX G X 1





Pitch
254=2.54PH

No.of pins
2P~12P

Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 E=Grey

Packing
 O=Pe bag
 A=Tray
 T=Tube

| REVISION RECORD | | | | |
|-----------------|------|-------------|------------|----------|
| REV | ECN | DESCRIPTION | DRFT | DATE |
| A1 | (A1) | 调整PC脚尺寸 | LICHAO LIU | 20.12.08 |

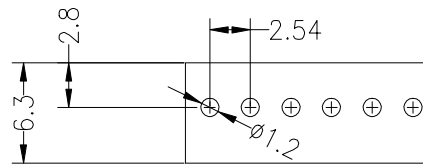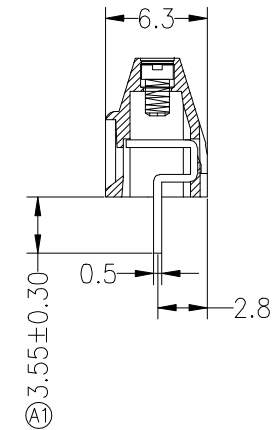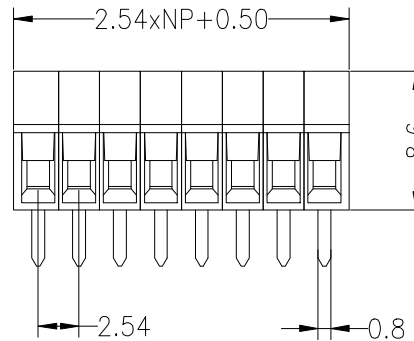

Recommended P.C.B Layout(Top Side)

| | | | | | |
|---------|------------|-------|-----|--|-------------------------------|
| DRAW | LICHAO LIU | SCALE | FIT | 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD | |
| | | UNIT | mm | | |
| CHECK | LICHAO LIU | SIZE | A4 | | |
| | | SHEET | 1/1 | | |
| APPROVE | 高永亮 | PROJ. | | PART NO. | JL308-254XXGX1 |
| | | | | TITLE: | 2.54mm Terminal Blocks Female |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[MBE-1512](#) [MBE-1520](#) [MBE-154](#) [MBE-156](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-163](#) [MI-254 \(35\)](#) [MPT-275](#) [ELM10110G](#) [BA311TU](#)
[BA411SU](#) [MV-254-D](#) [MV-255](#) [MV-493](#) [MVE-252](#) [MVE-253](#) [MVEB-153](#) [1705142](#) [1-796689-8](#) [1841320000](#) [S451](#) [29.007](#) [29.116](#) [30.204](#)
[30.503](#) [30.756](#) [30.853](#) [9872-0-00-15-00-00-33-0](#) [996750](#) [1710052](#) [20020316-G071B01LF](#) [20020327-C061B01LF](#) [29590](#) [30.652](#) [30.710](#)
[30.754](#) [30.757](#) [32.058](#) [37.206](#) [37.208](#) [37.507](#) [37.558](#) [38331-5812](#) [38331-8018](#) [38540-1910](#) [39.002](#) [MBE-1517](#) [MBE-153](#)