

NOTES1:

- UL Standard  
 1. Rated voltage/current : 600V / 41A  
 2. Withstanding voltage : AC2200V/1Min.  
 3. Torque value : M3 , 7.0lb.in  
 4. Wire range : 24~8AWG(str)  
 24~10AWG(sol)

IEC Standard

1. Pollution degree 2 2 3  
 Overvoltage category II III III  
 Rate Impulse voltage(kV) 6kV 6kV 6kV  
 Rate voltage(V) 1000V 1000V 1000V  
 Rate current(A) 41A  
 2. Torque value : M3 , 0.8N·m  
 3. Wire range : 0.5~6mm<sup>2</sup>

NOTES2:






1. Dimension shall be interpreted per ASME Y14.5-2009  
 2. Pitch : 7.62mm, Poles : N=02~12P  
 3. Stripping length : 11mm  
 4. Operating temperature: -40°C~+105°C  
 5. Undimensioned tolerances:

Pitch range	Nominal dimension		range		mm
	Over	TO	Over	TO	
6	10	30	60	100	0.1/10
10	10	30	60	150	≤
24	30	60	100	150	±2°
±0.15/±0.20		±0.30/±0.50		±0.70/±1.00	±1.30

6. RoHS Compliance

Ordering Information

JL5EDGKHM-762 XX G 0 1

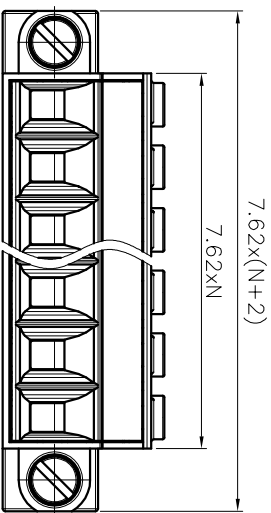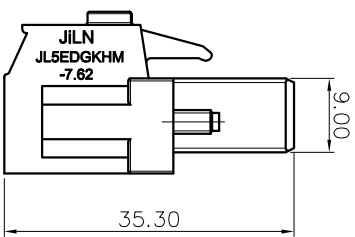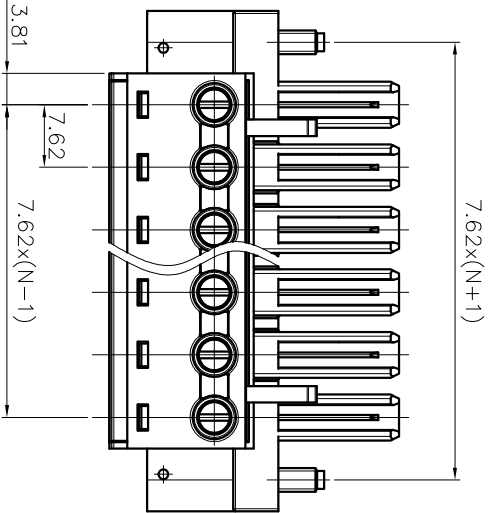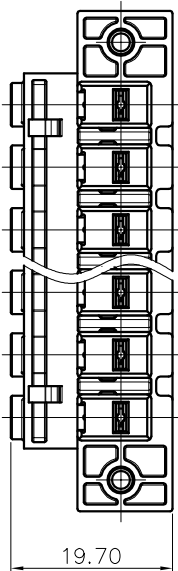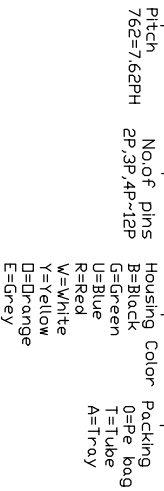

REVISION RECORD			
REV	ECN	DESCRIPTION	DATE
A0		NEW	20.12.9

DRAW	SHUANGPING ZHENG		SCALE	FIT	PART NO.	JL5EDGKHM-762XXG01
	CHECK	LICHAD LIU	UNIT	mm		
APPROVE	YONGLIANG GAO	SIZE	A4	SHEET	1/1	TITLE:
		PRD				JL5EDGKHM-762-XXP 插拔式母座/绿色/带耳

**JILN** 东莞市锦凌电子有限公司  
 DONGGUAN JINLING ELECTRONIC CO., LTD

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Terminal Blocks](#) category:*

*Click to view products by [JILN](#) manufacturer:*

Other Similar products are found below :

[MBE-1512](#) [MBE-1520](#) [MBE-154](#) [MBE-156](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-163](#) [MI-254 \(35\)](#) [MI-272](#) [MPT-275](#) [ELM10110G](#)  
[BA311TU](#) [BA411SU](#) [MV-253/NCNOC](#) [MV-254-D](#) [MV-255](#) [MV-493](#) [MVE-252](#) [MVE-253](#) [MVE-273](#) [MVEB-153](#) [1700096](#) [1705142](#)  
[1712417](#) [1713088](#) [1745195](#) [1760594](#) [1-796689-8](#) [1-796692-6](#) [1800114](#) [20020314-C121B01LF](#) [20020316-G041B01LF](#) [KP03215000J0G](#)  
[KP04215000J0G](#) [S451](#) [29.007](#) [29.116](#) [30.103](#) [30.106](#) [30.503](#) [30.608](#) [30.755](#) [30.756](#) [30.853](#) [9872-0-00-15-00-00-33-0](#) [996750](#) [1706303](#)  
[1710052](#) [1712418](#)