

NOTES1:
UL Standard

1. Rated voltage/current : 300V / 30A
2. Withstanding voltage : AC1600V/1Min.
3. Torque value : M3 , 4.43Lb.in
4. Wire range : 30~10AWG

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(kV)	6kV	6kV	6kV
Rate voltage(V)	1000V	630V	500V
Rate current(A)		32A	

2. Torque value : M3 , 0.5N·m
3. Wire range : 0.2~4.0mm²/6mm²(sol)

NOTES2:






1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 6.35mm, Poles : N=02~24P
3. Stripping length : 8~9mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm		Tolerance	
Over	6	Over	30	Over	0.1/10
TO	10	TO	60	TO	150
6	10	24	30	60	100
				100	150
				±0.15	±0.20
				±0.30	±0.30
				±0.50	±0.70
				±1.00	±1.30
					±2°

6. RoHS Compliance

Ordering Information

JL636S - 635 XX G 0 1

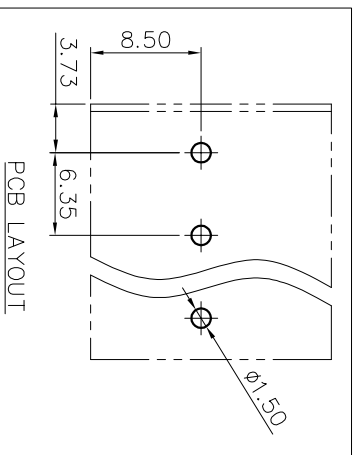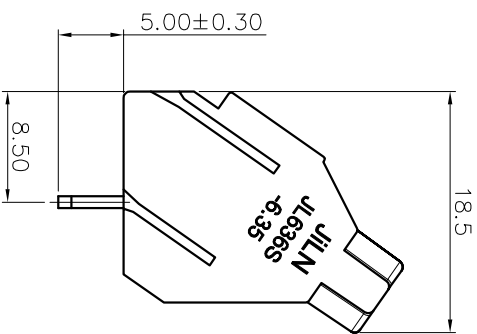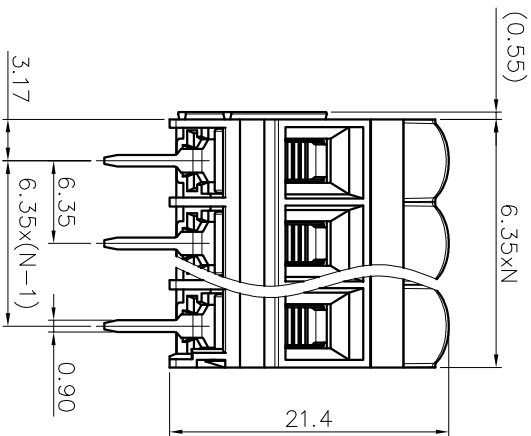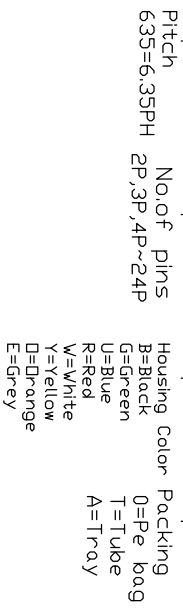

DRAW	SHUANGPING ZHENG	SCALE	FIT	PART NO.	
CHECK	LICHAD LIU	UNIT	mm	JL636S-635XXG01	
APPROVE	YONGLIANG GAO	SIZE	A4	DONGGUAN JINLING ELECTRONIC CO., LTD	
		SHEET	1/1	TITLE:	
		PRD		JL636S-6.35-XXP螺钉式端子台/绿色	

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A		新发行	Z.S.P	22.6.24

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[MBE-1512](#) [MBE-1520](#) [MBE-154](#) [MBE-156](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-163](#) [MI-254 \(35\)](#) [MPT-275](#) [ELM10110G](#) [BA311TU](#)
[BA411SU](#) [MV-254-D](#) [MV-255](#) [MV-493](#) [MVE-252](#) [MVE-253](#) [MVEB-153](#) [1705142](#) [1-796689-8](#) [1841320000](#) [S451](#) [29.007](#) [29.116](#) [30.204](#)
[30.503](#) [30.756](#) [30.853](#) [9872-0-00-15-00-00-33-0](#) [996750](#) [1710052](#) [20020316-G071B01LF](#) [20020327-C061B01LF](#) [29590](#) [30.652](#) [30.710](#)
[30.754](#) [30.757](#) [32.058](#) [37.206](#) [37.208](#) [37.507](#) [37.558](#) [38331-5812](#) [38331-8018](#) [38540-1910](#) [39.002](#) [MBE-1517](#) [MBE-153](#)