


Pin No.	SIGNAL
1	SCC1
2	DP1
3	DN1
4	PWR_IN_A
5	PWR_IN_B
6	DN2
7	DP2
8	ACC2
9	DETECT_1
10	DETECT_2
SHELL_A	GND
SHELL_B	GND

**SPECIFICATION**

**MATERIAL**  
See drawing

**STANDARD DATA**  
Operating temperature: -10°C ~ +60°C  
Storage temperature: -20°C ~ +85°C


**ELECTRICAL**  
Insulator resistance: 100Mohms Min.  
Withstanding voltage: 100 VAC / minute  
Contact resistance: Initial 40mohms Max;  
after 50mohms Max.

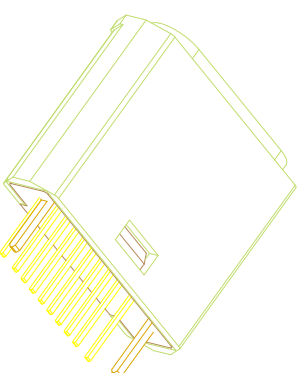

MAPX	MODIFICATION	DATE

# 深圳市精拓金电子有限公司

公差一览表		单位	制图	制图料号
TOLERANCE UNLESS OTHERWISE	UNITS	MM	DRAWING	PRODUCT PART NO.
X ±0.35	X	±5°	审核 Gavin	产品名称
X ±0.30	X	±2°	审核 郭治富	PRODUCT NO.
XX ±0.20	XX	±1°	核准 黄国荣	菱形8PIN夹板母座
XXX ±0.10	XXX	±0.5°	DATE 2016-09-09	角法
				VER
				AD

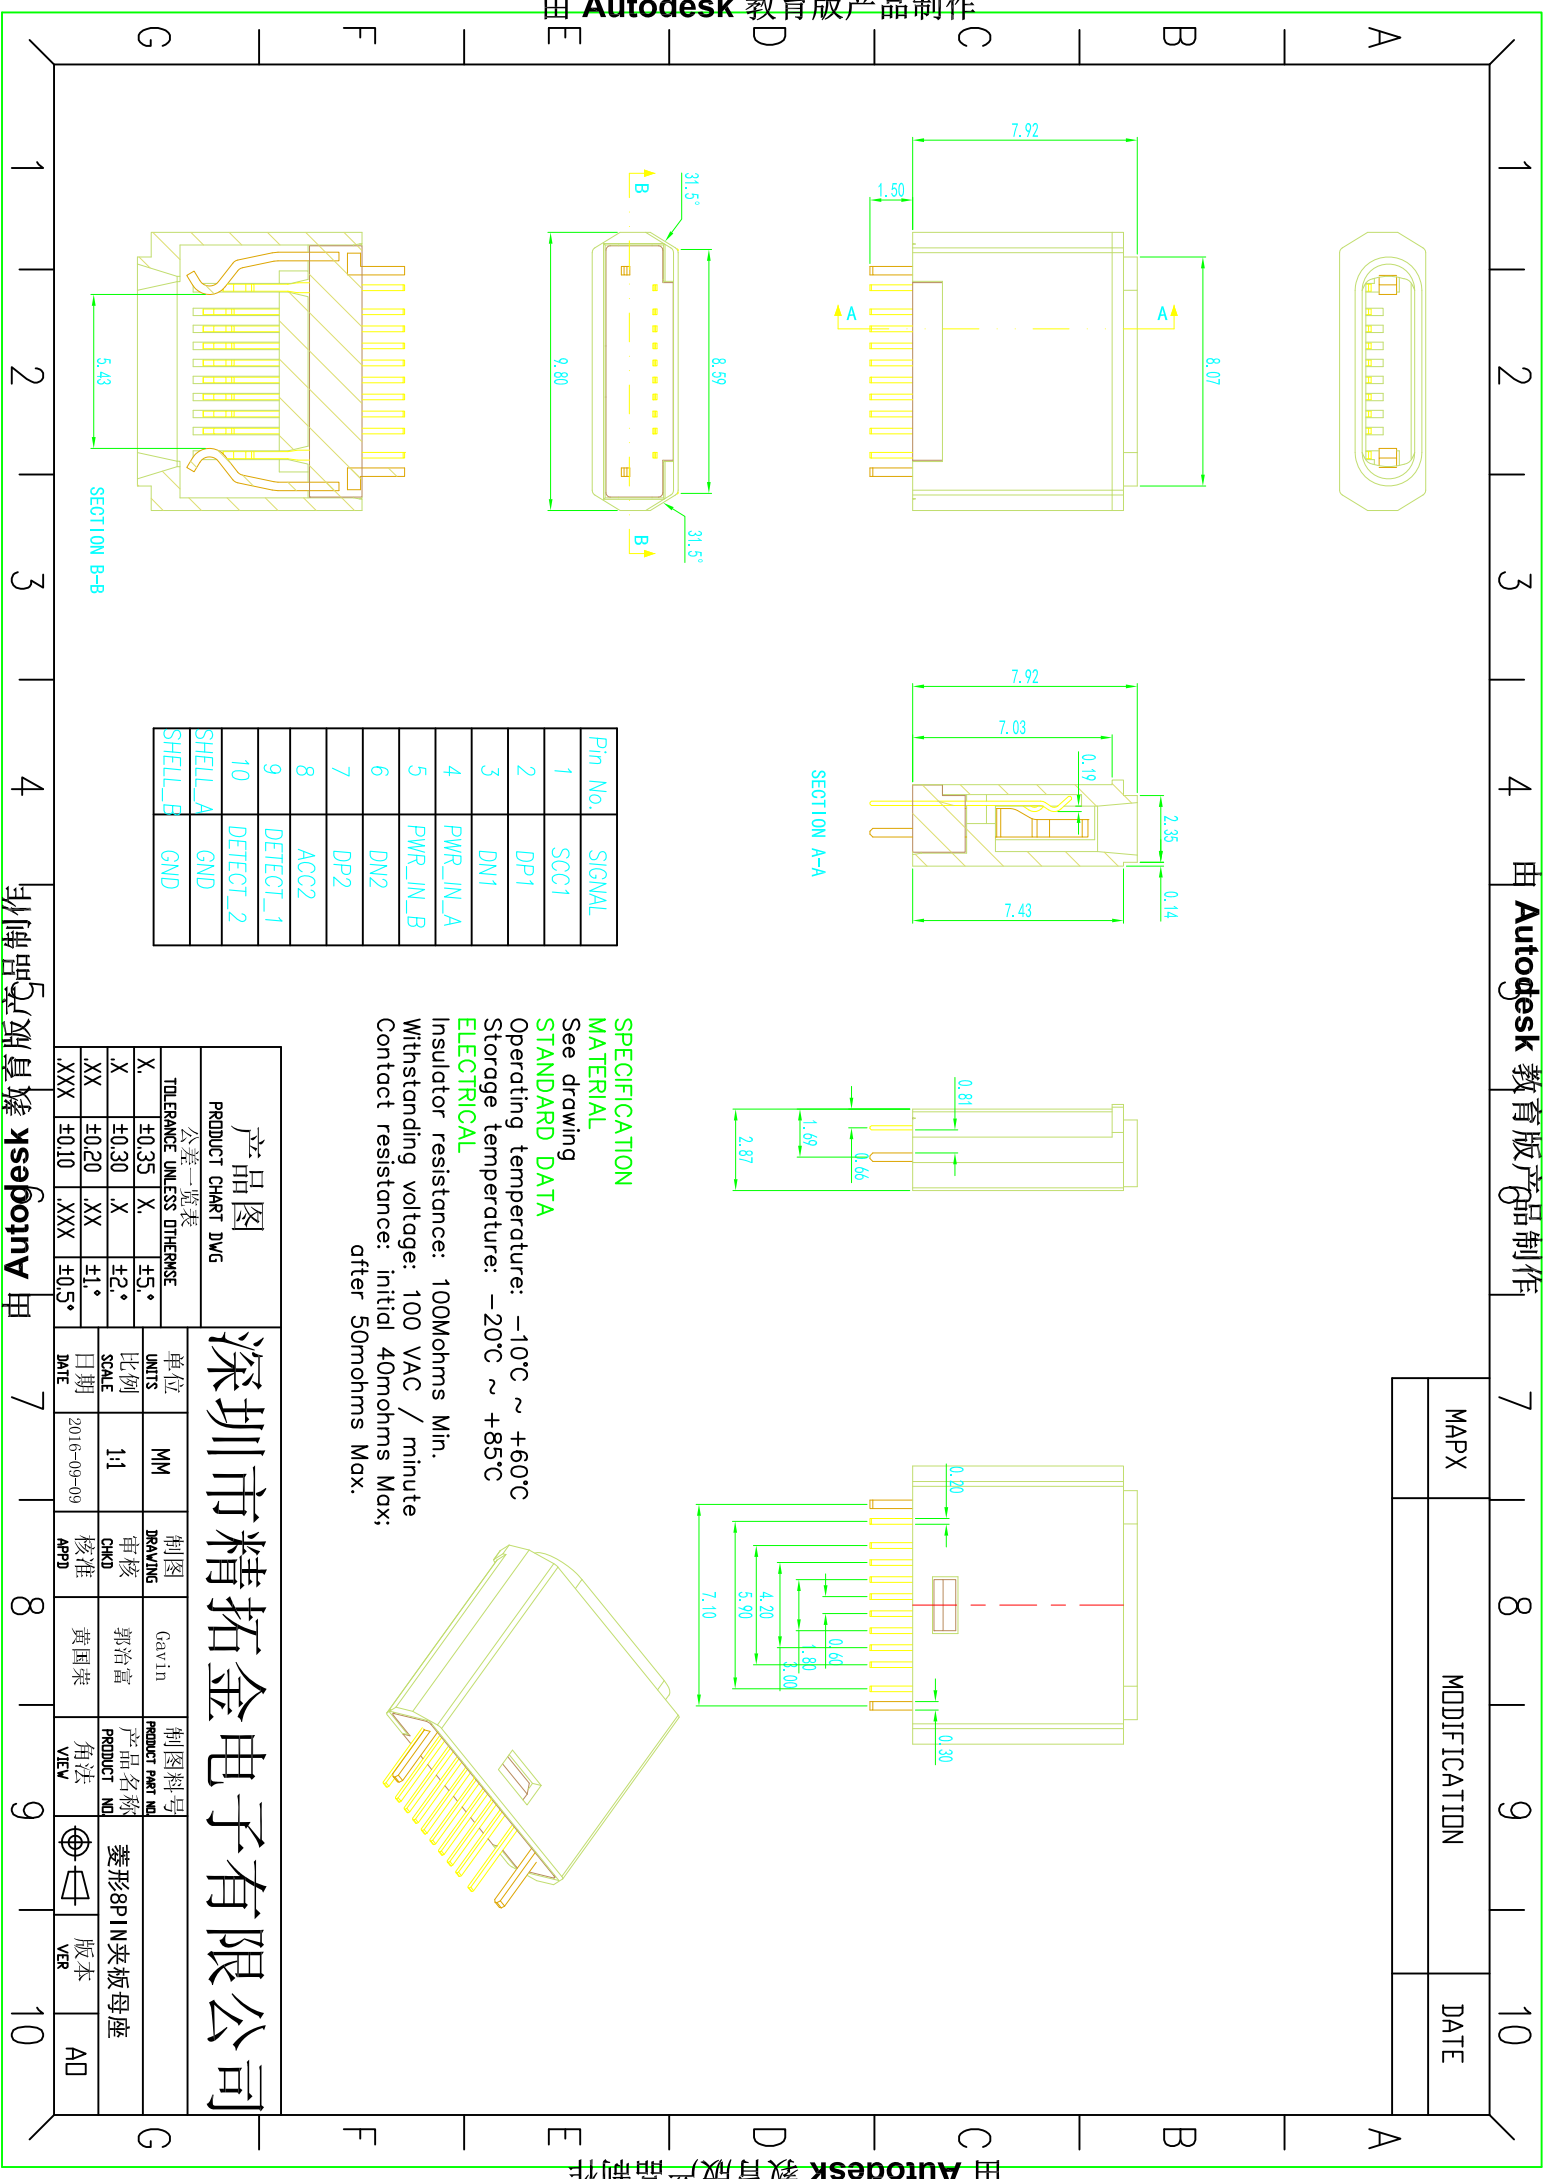

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [USB Connectors](#) category:*

*Click to view products by [Jing](#) manufacturer:*

Other Similar products are found below :

[10033527-N3112MLF](#) [17-210561](#) [GMCB05B11124H1EU](#) [17-200931](#) [65-647-8-BK-BU](#) [690-010-295-484](#) [73725-1191BLF](#) [950](#) [E8144-B01021-L](#) [A-USB A-LP-SMT-C](#) [A-USB B-TOP-C](#) [MUSBA511N5](#) [MUSBB15131](#) [MUSBC111M5](#) [MUSBD11135](#) [217450-1](#) [CA 6 W LD](#)  
[896-30-004-00-000000](#) [KUSBVX-BS1N-W30](#) [KUSBX-AP-KIT-SCBLK](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W](#) [KUSBX-SMTAS1NBTR](#) [KUSBX-SMTBS1NBTR](#) [30-498-6](#) [SK-60A-2](#) [17-200261](#) [17-210051](#) [1734082-1](#) [FK-37-32SL](#) [30-1574](#) [30-470](#) [30-489](#) [30-541](#) [30-572-3](#) [30-9503](#) [M9177/2-1](#) [MAB 5 S](#) [MIKROE-1451](#) [33UBBR-04SW11R](#) [USBFTV2PEM2G](#) [USBFTVC6ZN](#) [USBFTVSCCG](#)  
[KUSBX-AS2N-W30](#) [KUSBX-SLAS1N-W](#) [KUSBX-SLAS1N-W30](#) [1-1734084-2](#) [E8110-001-01](#) [MUSBC11135](#) [NK-27-32SL](#)