



晶创和立科技

A995012


MINIATURE CADMIUM SULPHIDE PHOTOCONDUCTIVE CELL



FEATURES

- Miniature open frame package
- Epoxy coated
- Moisture resistant
- Spectral response similar to the human eye
- Applications include dusk-dawn lighting control

LIGHT DEPENDENT RESISTOR

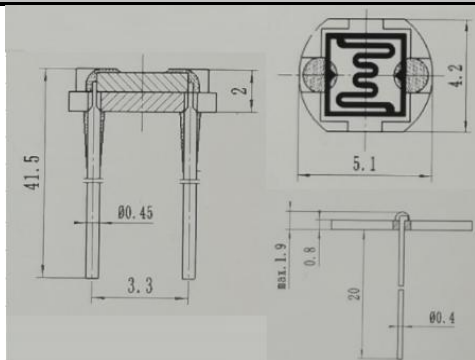

Dimensions in millimetres

SPECIFICATION AND PERFORMANCE

Model	Vmax (VDC)	Pmax (mW)	Ambient temp(°C)	Spectral peak (nm)	Light Resistance at 10Lux (KΩ)	Dark Resistance (MΩ)	Gamma a value at 100- 10Lux	Response Time (ms)	
								Rise Time	Decay time
A995012	150	90	-30~+70	530	18-44	0.45	0.75	30	30

测试条件

- 1.亮电阻：用400~600Lux光照射60~90分钟后，在标准光源A(色温2854K)下，用10Lux光测量。
- 2.暗电阻：关闭10Lux光照后第10秒的电阻值（特别注明除外）。
- 3.γ：是指10Lux和100Lux照度下的标准值。
$$\gamma = \frac{\lg(R_{10}/R_{100})}{\lg(100/10)} = \lg(R_{10}/R_{100})$$
R10、R100分别为10Lux和100Lux照度下的电阻值。
γ的公差为±0.15。
- 4.最大功率损耗：环境温度为25℃时的最大功率。
- 5.最大外加电压：在黑暗中可连续施加给元件的最大电压。

焊接条件

- 1.焊接温度：小于260℃
- 2.焊接时间：不大于3秒
- 3.焊接距离（距离基板底部）：大于3mm

注：

- 1.本规格书所列型号为常规型号，可根据客户需求特别定制。
- 2.请在规格要求范围内使用，严禁超负荷使用。

Measuring Conditions

1. Light resistance: Measured at 10 Lux with standard light A (2854K color temperature) and 60~90minutes illumination at 400~600 Lux prior testing.
- 2.Dark Resistance: Measured 10 seconds after closed 10 lux (The special notes are not included).
- 3.Gamma Characteristic: Between 10 lux and 100 lux and given by
$$\gamma = \frac{\lg(R_{10}/R_{100})}{\lg(100/10)} = \lg(R_{10}/R_{100})$$
R10、R100 Cell resistance at 10 lux and 100 lux.
The error of γ is ±0.15
- 4.P max; Max. Power dissipation at ambient temperature of 25 °C.
- 5.V max; Max. Voltage in darkness that may be applied to the cell continuously.

Soldering condition requirments:

- 1.temperature:less than 260
- 2.Time:equal or less than 3 seconds
- 3.Distance from case:more than 3mm

Notes :

- 1.Here listed types are common ones and customized selections available on request.
2. Please use it within the specifications requirements.No overload is allowed.

SHENZHEN JINGCHUANGHELI TECHNOLOGY CO., LTD.

Tel:+86-755-23210829 Fax:+86-755-23210825

[Http://www.szjchl.com/](http://www.szjchl.com/)

E-mail:mk0622@163.com.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Adafruit Accessories](#) category:

Click to view products by [Jing Chuang](#) manufacturer:

Other Similar products are found below :

- [3015](#) [3209](#) [2998](#) [3561](#) [2974](#) [3182](#) [3290](#) [2755](#) [3560](#) [3562](#) [2503](#) [3548](#) [3011](#) [3597](#) [3048](#) [2776](#) [3299](#) [2973](#) [2922](#) [2958](#) [2860](#) [2836](#) [3558](#)
- [2686](#) [2968](#) [2972](#) [2969](#) [2871](#) [2851](#) [2873](#) [2895](#) [3610](#) [2939](#) [2698](#) [3568](#) [2869](#) [2866](#) [3551](#) [2858](#) [2855](#) [3590](#) [3447](#) [3581](#) [3353](#) [2744](#) [3585](#)
- [3584](#) [3552](#) [3484](#) [2865](#)