




## FEATURES

- RoHS compliant
- SMD type body size JD1410
- Large withstanding surge current capability : 200A (@8/20 $\mu$ s)
- Lower clamping voltage and excellent performance on ringing waves testing.
- Lead Free Finish/RoHS Compliant
- Green Molding Compound (No Halogen and Antimony)

## MECHANICAL DATA

- Case: JD1410
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 27mg/0.00095oz

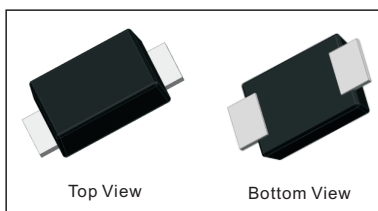

### Maximum Ratings and Thermal Characteristics(TA = 25°C unless otherwise specified)

Technology Data	Symbol	Value	Unit
Maximum allowable continuous AC voltage at 50-60Hz	$V_{RMS}$	150	V
Maximum allowable continuous DC voltage	$V_{DC}$	200	V
Maximum allowable clamping voltage	$V_C$	350	V
Maximum peak current (8/20 $\mu$ s)	$I_{peak}$	200	A
Operating Junction Temperature and Storage Temperature Range	$T_j, T_{stg}$	-55 ~ +150	°C

#### NOTES:

1. The breakdown voltage was measured at 1mA
2. The clamping voltage was measured at 8/20 $\mu$ s standard current, (1A)
3. The peak current was tested at 8/20 $\mu$ s waveform

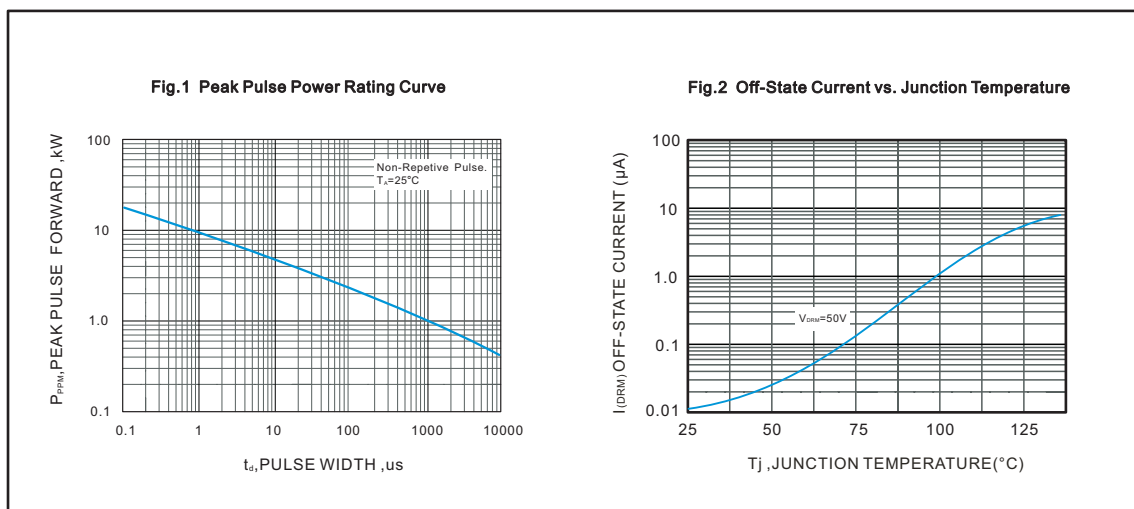




Fig.3 Derating Curve for number of pulses

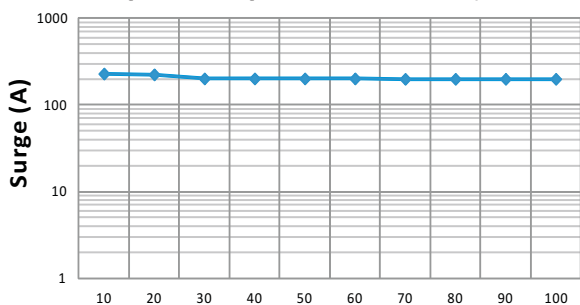


Fig.4 V/I Curve


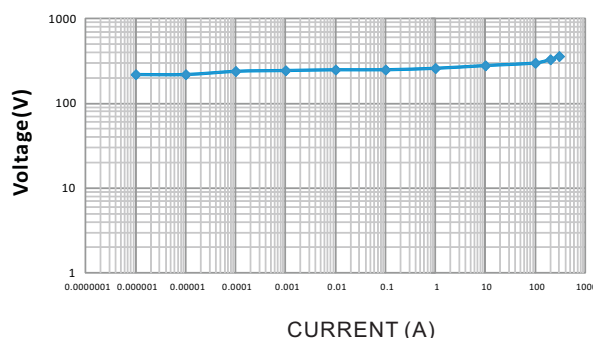


Fig.5 Surge Waveform

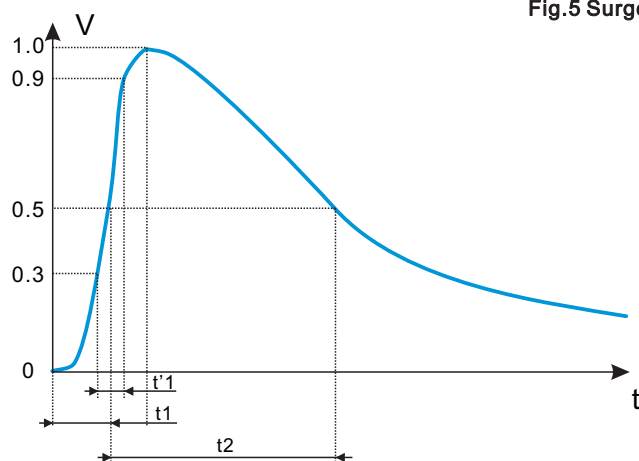


IEC61000-4-5 Standards

SEVERITY LEVEL	T1(=1.67t <sub>1</sub> )	T2
1	10us	1000us
2	8us	20us

8/20us waveform current

Fig.6 The IR reflow and temperature of soldering for Pb free process

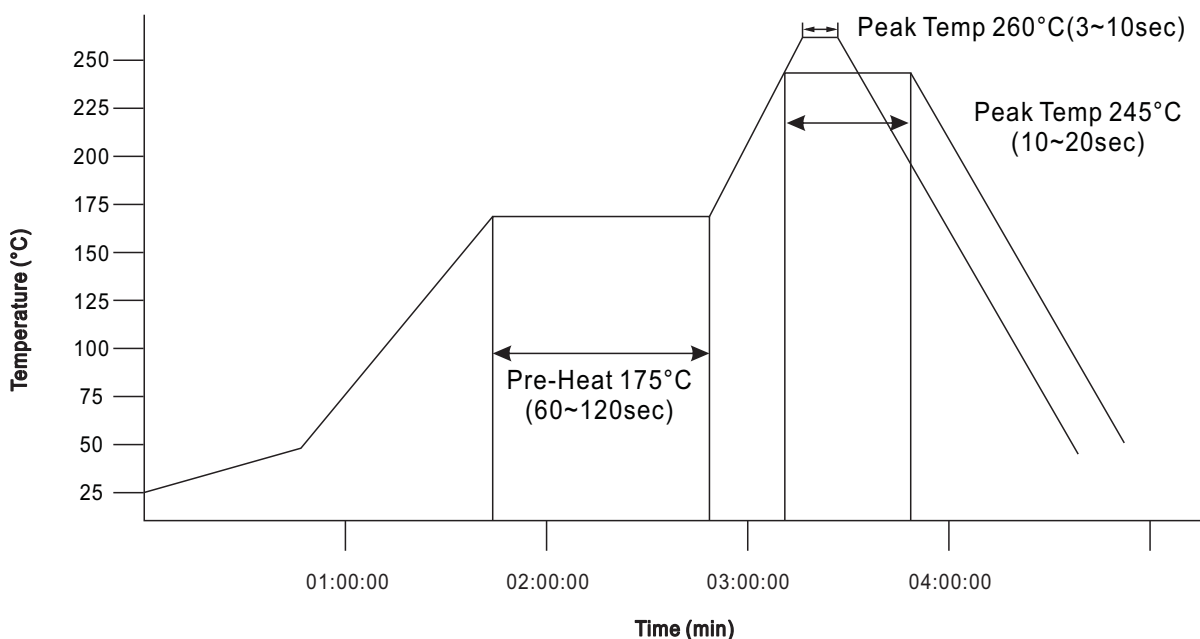

**IR reflow Pb free process suggestion profile:**


- (1) Ramp-up rate (217°C to peak) +3°C/second max.
- (2) Temp. maintain at 175±25 180seconds max.
- (3) Temp. maintain above 217°C 60~150 seconds
- (4) The peak temperature must be at least 260°C, the time above the 255°C must be within 20s




PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

JD1410

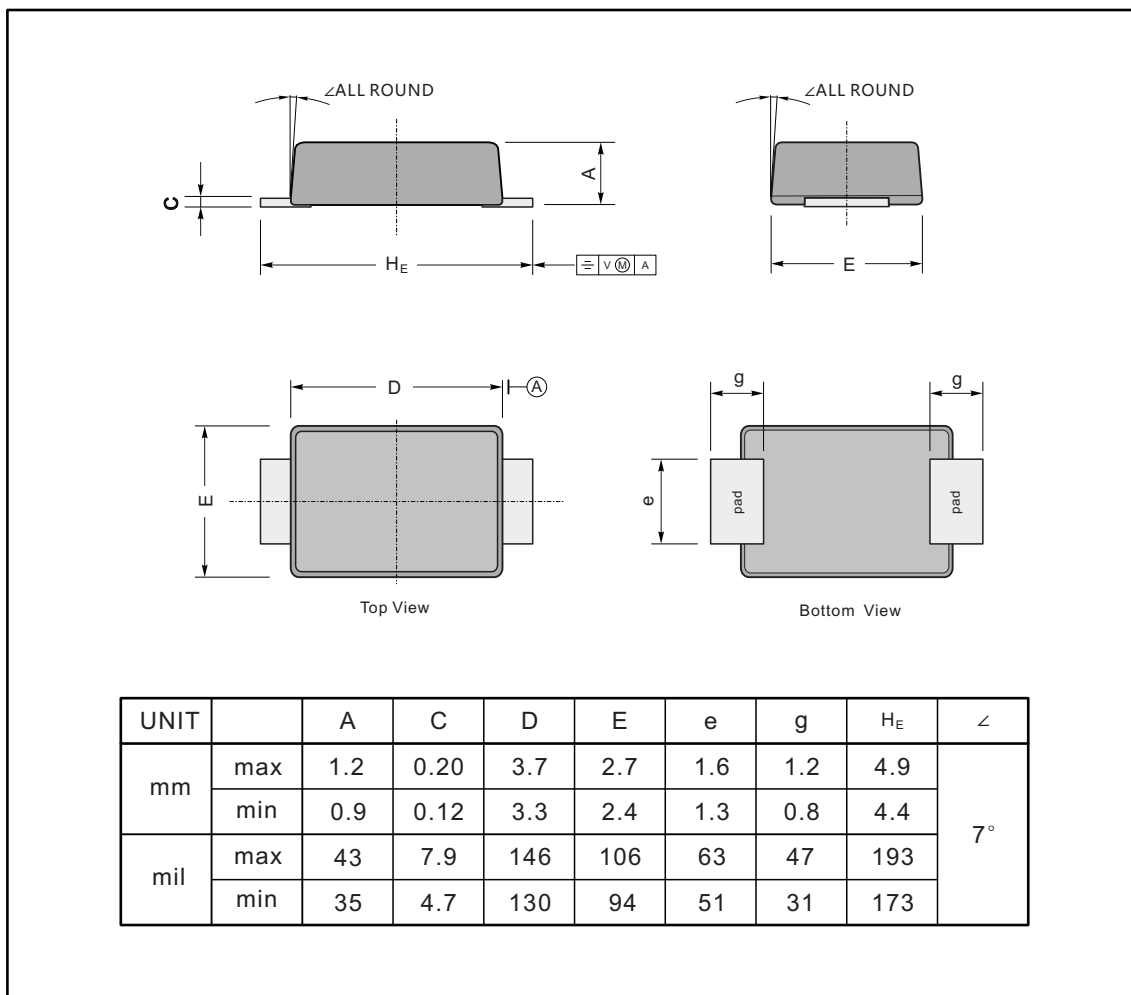

The recommended mounting pad size

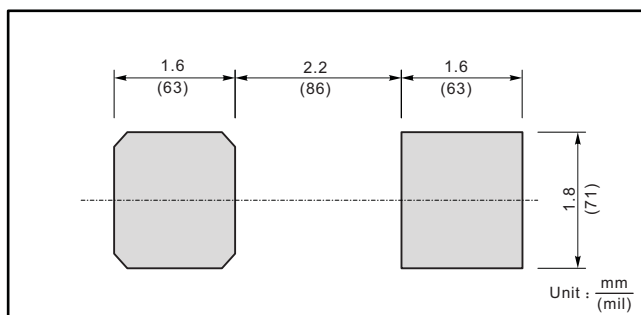

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Surge Suppressors](#) category:*

*Click to view products by [Jingdao](#) manufacturer:*

Other Similar products are found below :

[GUS11](#) [GUS4](#) [30460](#) [1810-15-A3](#) [4B06B-EC1-150LF](#) [CX06M](#) [CCTV1](#) [GUS13](#) [GUS14](#) [GUS5](#) [VAL-MS 320/3+0-FM](#) [STCHSP121BT1RU](#)  
[LP-STRL-DFF](#) [0804111](#) [STC-CAT6-P0E-I](#) [DS71RS-120](#) [CRMJ8-POE-C6](#) [DS42S-48DC](#) [DS41S-280](#) [STCSS640362](#) [JD1410-SS120](#)  
[P61089A](#) [P61089B](#) [SMTPA200](#) [1063120000](#) [2800532](#) [2800786](#) [2800983](#) [2800989](#) [2081890000](#) [2080480000](#) [2080490000](#) [2080650000](#)  
[2859233](#) [2859330](#) [2905284](#) [2905355](#) [2905416](#) [2905418](#) [2905473](#) [2906764](#) [2906776](#) [2906809](#) [2906810](#) [2906824](#) [2906834](#) [2906838](#)  
[2906844](#) [2906847](#) [2906848](#)