



2A SURFACE MOUNT SCHOTTKY BRIDGE

FEATURES:

- Reverse Voltage - 40 to 200 V
- Forward Current - 2 A
- High Surge Current Capability
- Designed for Surface Mount Application

PINNING

PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)



MBF Package

MECHANICAL DATA

- Case: MBF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 75mg 0.0026oz

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	MB24F	MB26F	MB28F	MB210F	MB220F	Units					
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	40	60	80	100	200	V					
Maximum RMS voltage	V _{RMS}	28	42	56	70	140	V					
Maximum DC Blocking Voltage	V _{DC}	40	60	80	100	200	V					
Maximum Average Forward Rectified Current at T _c = 90 °C	I _{F(AV)}	2.0					A					
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	50		40			A					
Max Instantaneous Forward Voltage at 2 A	V _F	0.55	0.70	0.85			V					
Maximum DC Reverse Current T _a = 25°C at Rated DC Reverse Voltage T _a = 100°C	I _R	0.5 10		0.3 5		mA						
Typical Junction Capacitance ¹⁾	C _j	220	80			pF						
Typical Thermal Resistance ²⁾	R _{θJA}	75					°C/W					
Operating Junction Temperature Range	T _j	-55 ~ +125					°C					
Storage Temperature Range	T _{stg}	-55 ~ +150					°C					

Note: 1. Measured at 1MHz and applied reverse voltage of 4 V D.C.

2. Mounted on glass epoxy PC board with 4×1.5"×1.5" (3.81×3.81 cm) copper pad.



Fig.1 Forward Current Derating Curve

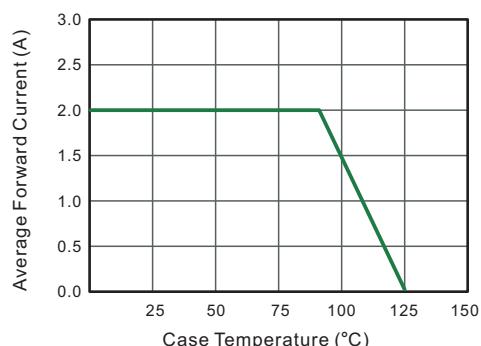


Fig.2 Typical Reverse Characteristics

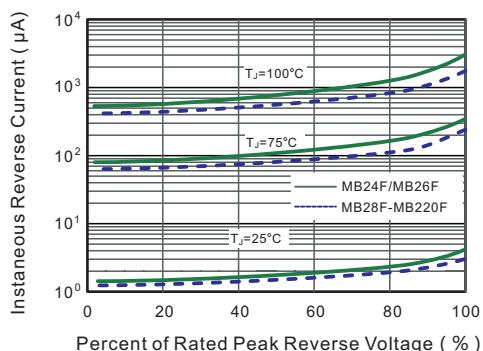


Fig.3 Typical Forward Characteristic

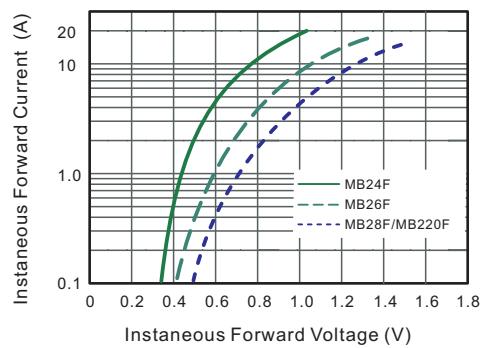


Fig.4 Typical Junction Capacitance

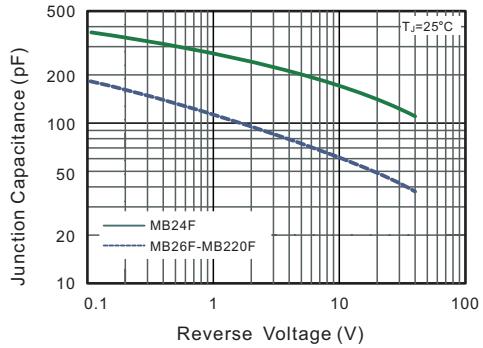


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


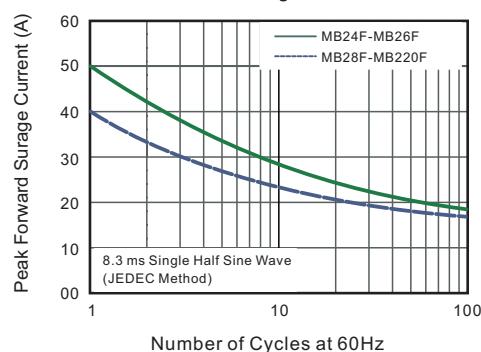


Fig.6- Typical Transient Thermal Impedance




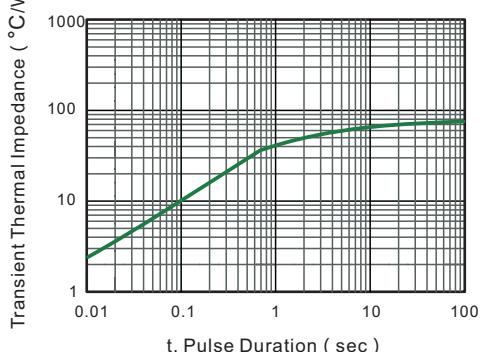


PACKAGE OUTLINE

Plastic surface mounted package; 4 leads

MBF

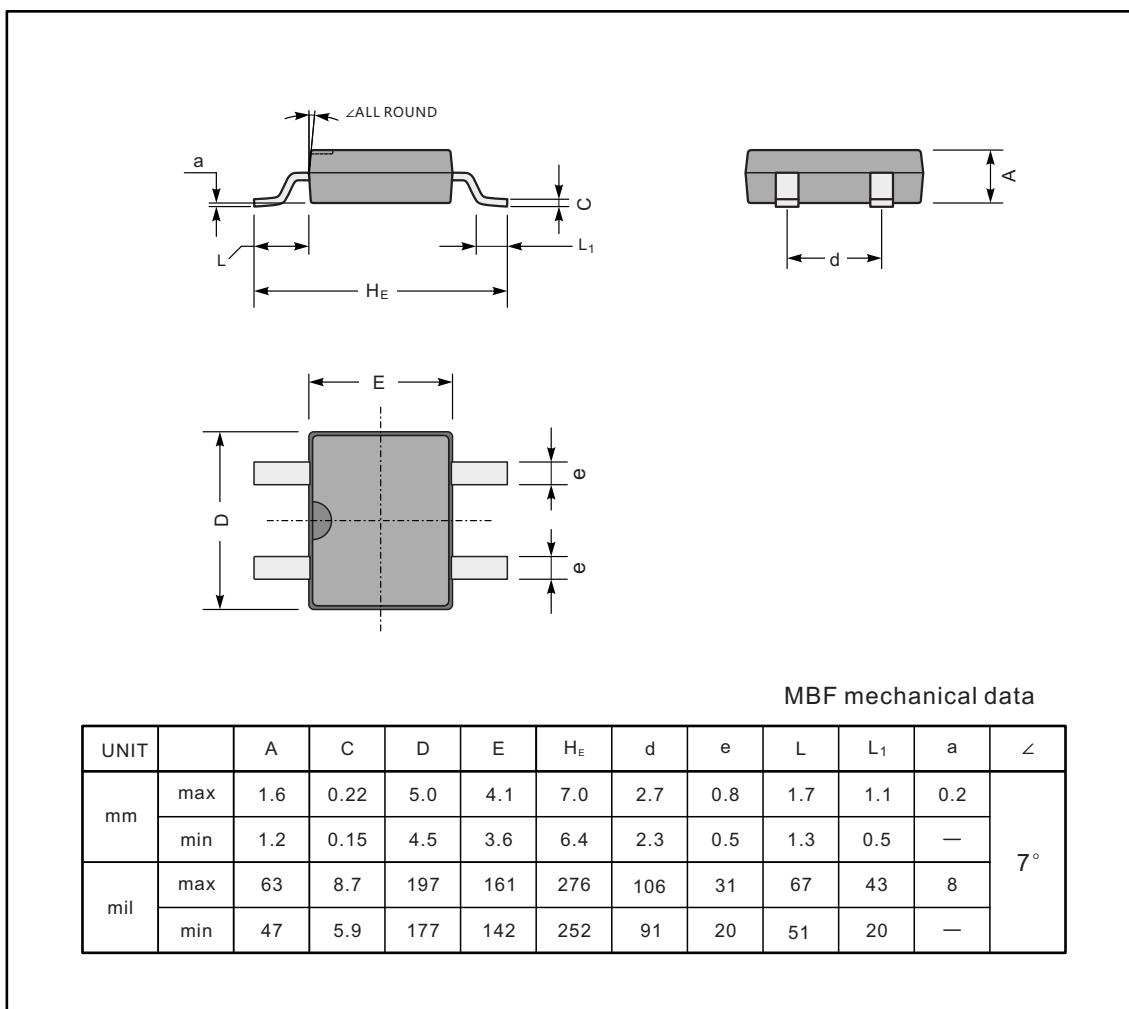

The recommended mounting pad size

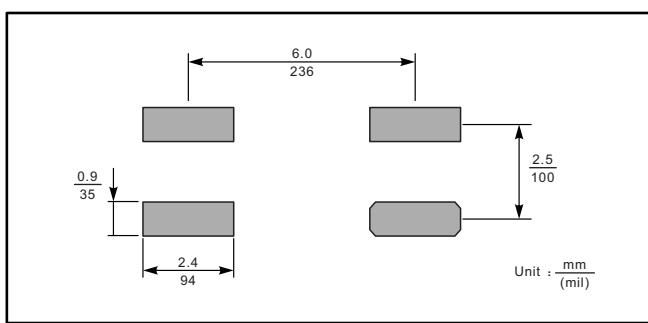

Marking

Type number	Marking code
MB24F	MB24F
MB26F	MB26F
MB28F	MB28F
MB210F	MB210F
MB220F	MB220F

The symbol consists of a rectangle with two vertical leads extending from its top edge. Inside the rectangle, the letters "MB" are followed by two lowercase letters "x" and "F".

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Jingdao manufacturer](#):

Other Similar products are found below :

[MB252](#) [MB356G](#) [MB358G](#) [MP358-BP](#) [90MT160KPBF](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#)
[GSIB680-E3/45](#) [DB101-BP](#) [DF01](#) [DF10SA-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [KBPC50-10S](#) [RS405GL-BP](#) [26MT120](#) [G5SBA60-E3/51](#)
[GBJ1502-BP](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU6M](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [TB102M](#) [MB1510](#) [MB6M-G](#) [MB86](#) [TL401G](#)
[MDA920A2](#) [TU602](#) [TU810](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BR84DTP204](#) [BU1010A-E3/51](#) [BU1508-E3/51](#) [BU2006-E3/45](#) [BU2008-E3/51](#) [KBPC25-02](#) [VS-60MT120KPBF](#) [DB105-BP](#) [DBB08G-TM-E](#) [DBD250G](#)