




FEATURES:

- RoHS compliant
- Large withstanding surge current capability : 200A (@8/20μs)
- Lower clamping voltage and excellent performance on ringing waves testing.
- Lead Free Finish/RoHS Compliant
- Green Molding Compound (No Halogen and Antimony)
- Glass Passivated Chip Junction
- High Surge Current Capability
- Designed for Surface Mount Application

PINNING

PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

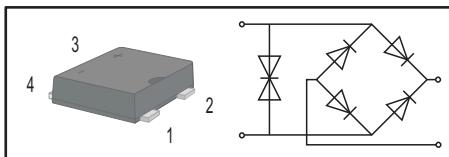

MECHANICAL DATA

- Case: UMBT
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 60mg/0.0021oz

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	TB110B	TB120B	TB240B	Units
Average Rectified Output Current at T _c = 125 °C	I _o		1.0		A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}		30		A
Maximum Forward Voltage at 1.0 A	V _F		1.1		V
Maximum DC Reverse Current @T _A =25 °C at Rated DC Blocking Voltage @T _A =125 °C (@VR=1000V)	I _R		5 40		μA
Typical Junction Capacitance (Note1)	C _j		13		pF
Typical Thermal Resistance (Note2)	R _{θJA} R _{θJC}		85 25		°C/W
Operating and Storage Temperature Range	T _j , T _{stg}		-55 ~ +150		°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4 V D.C.








2. Mounted on glass epoxy PC board with 4×1.5"×1.5" (3.81×3.81 cm) copper pad.





Maximum Ratings and Thermal Characteristics(TA = 25°C unless otherwise specified)

Technology Data	Symbol	TB110B	TB120B	TB240B	Unit
Maximum allowable continuous AC voltage at 50-60Hz	V _{RMS}	125	155	310	V
Breakdown Voltage at 1mA	V _{BR}	190~210	237~263	492~543	V
Maximum allowable continuous DC voltage	V _{DC}	170	220	440	V
Maximum allowable clamping voltage	V _C	300	350	700	V
Maximum peak current (8/20μs@2Ω)	I _{peak}		200		A
Operating Junction Temperature and Storage Temperature Range	T _j , T _{stg}		-55 ~ +150		°C

NOTES:

1. The breakdown voltage was measured at 1mA
2. The clamping voltage was measured at 8/20μs standard current, (1A)
3. The peak current was tested at 8/20μs waveform

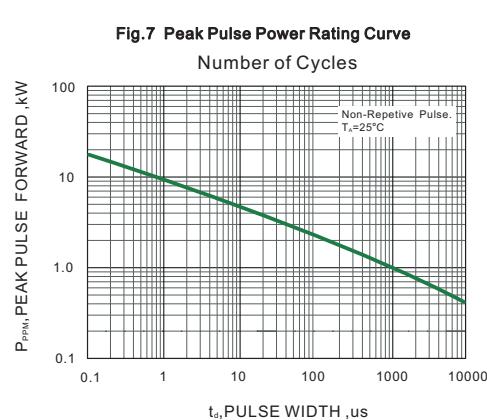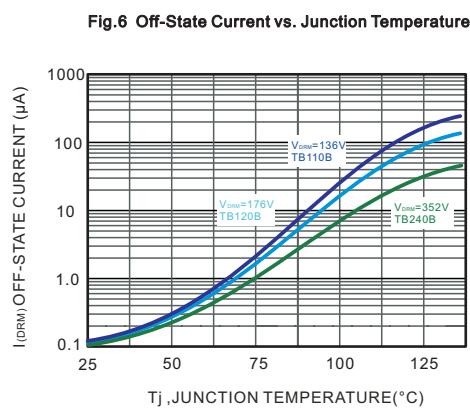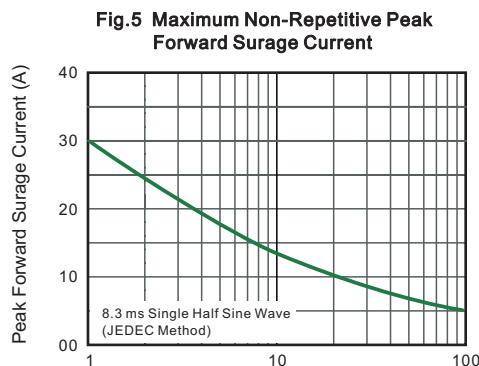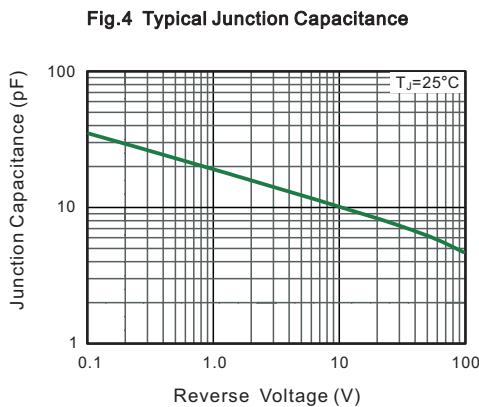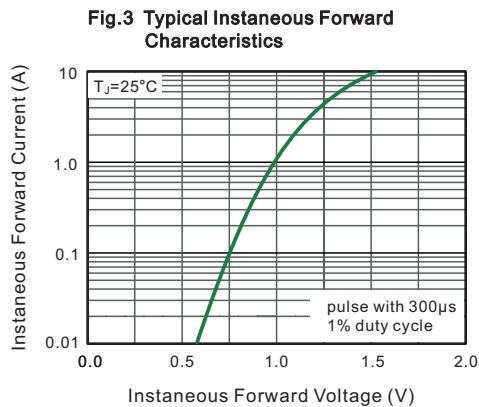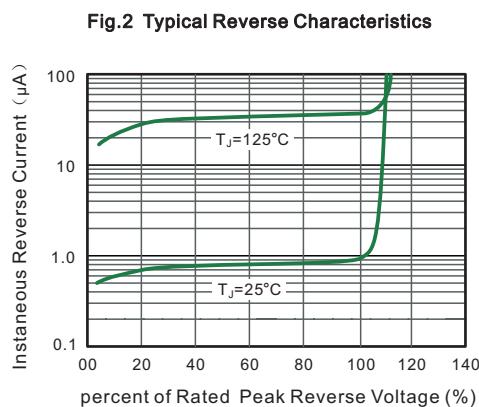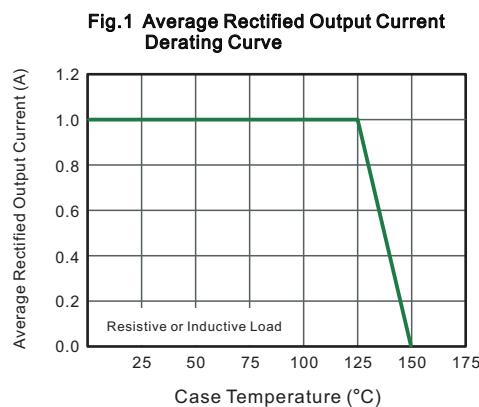

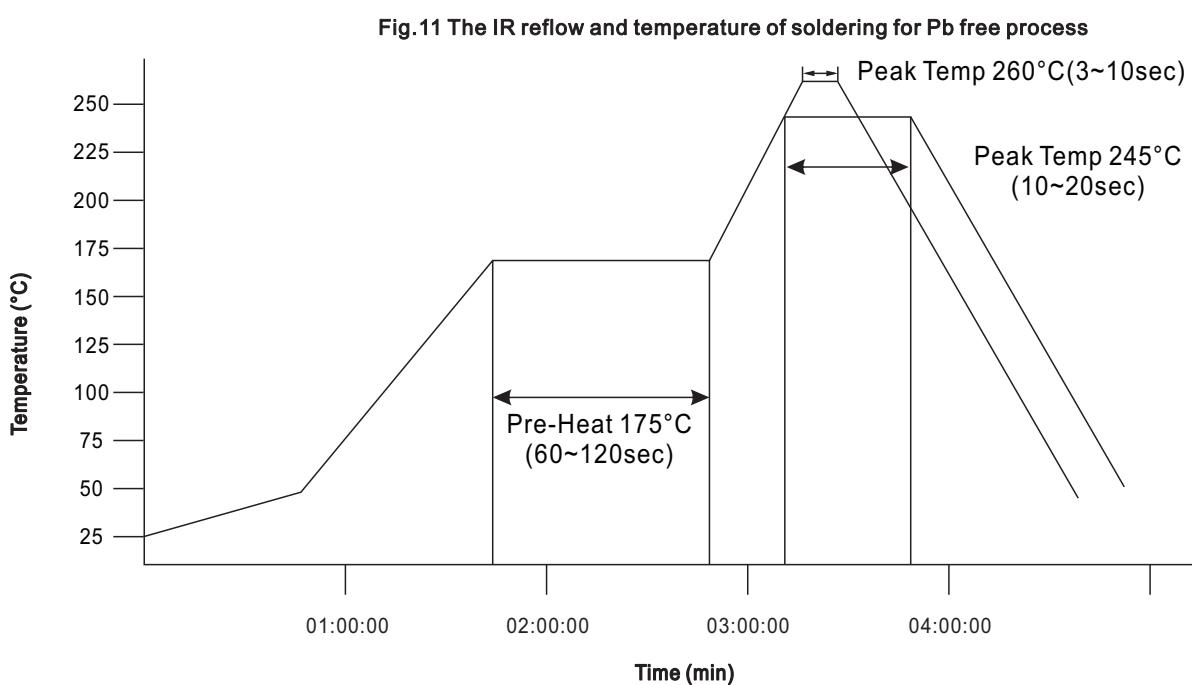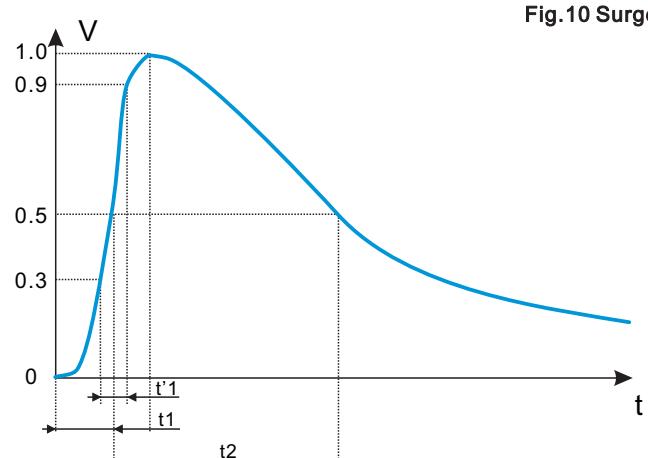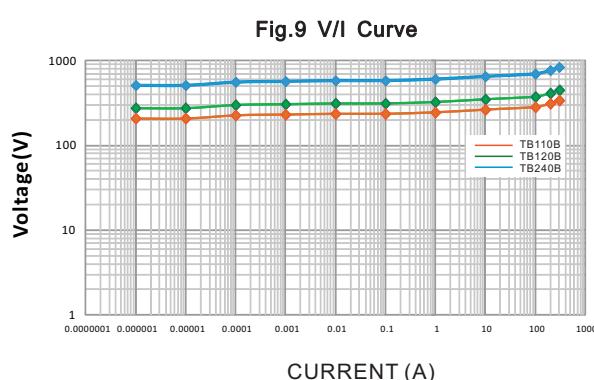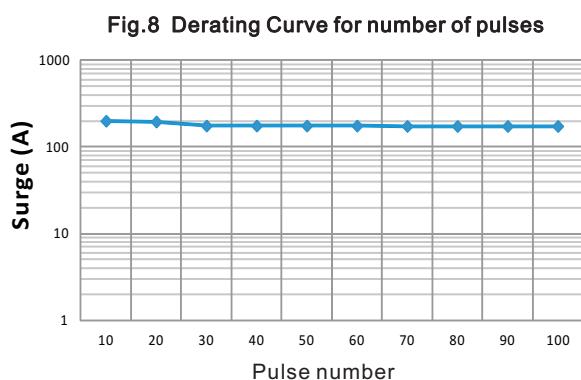

IR reflow Pb free process suggestion profile:


- (1) Ramp-up rate (217°C to peak) +3°C/second max.
- (2) Temp. maintain at 175±25 180seconds max.
- (3) Temp. maintain above 217°C 60~150 seconds
- (4) The peak temperature must be at least 260°C, the time above the 255°C must be within 20s



PACKAGE OUTLINE

Plastic surface mounted package; 4 leads


UMBT

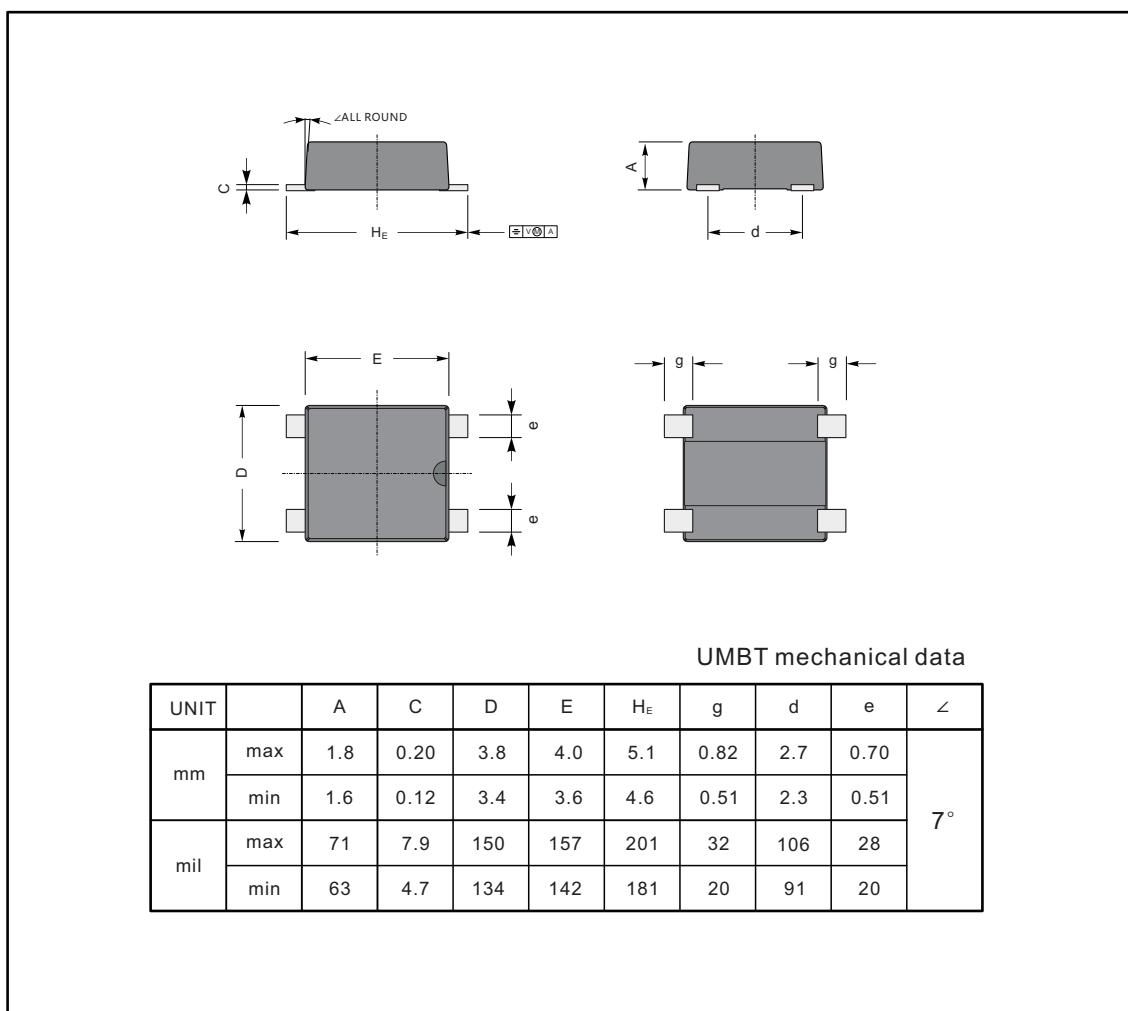

UMBT mechanical data

UNIT		A	C	D	E	H _E	g	d	e	<
mm	max	1.8	0.20	3.8	4.0	5.1	0.82	2.7	0.70	7°
	min	1.6	0.12	3.4	3.6	4.6	0.51	2.3	0.51	
mil	max	71	7.9	150	157	201	32	106	28	7°
	min	63	4.7	134	142	181	20	91	20	

The recommended mounting pad size

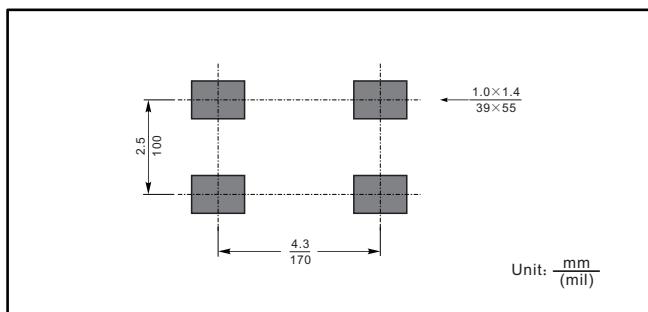

Marking

Type number	Marking code
TB110B	T110B
TB120B	T120B
TB240B	T240B

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Jingdao manufacturer](#):

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [MP358-BP](#) [90MT160KPBF](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#)
[GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DBA100G](#) [DBA150G](#) [DBA250G](#) [DBA40G](#) [DBD10G-TM-E](#) [DBF10G](#) [DBF250G](#)
[DBG150G](#) [DBG250G](#) [DF01](#) [DF10SA-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [KBPC50-10S](#) [RS405GL-BP](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#)
[GBU10J-BP](#) [GBU6M](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [TB102M](#) [MB1510](#) [MB6M-G](#) [MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#)
[TU810](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BR84DTP204](#)