



# D3K6005 THRU D3K610

BRIDGE RECTIFIERS GLASS PASSIVATED

REVERSE VOLTAGE - 50 to 1000Volts


FORWARD CURRENT - 6.0 Amperes

## FEATURES

- Glass passivated chip junction
- High case dielectric strength
- High surge current capability
- Ideal for printed circuit board

## MACHANICAL DATA

- Terminal:Plated leads solderable per MIL-STD 202E, Method 208C
- Case:UL-94 Class V-0 recognized Flame Retardant Epoxy
- Polarity:Polarity symbol marked on body
- Mounting position:any

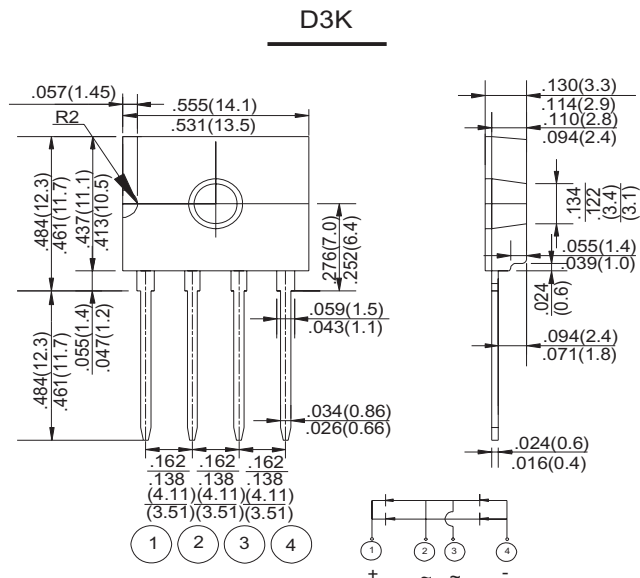

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS





Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	D3K	D3K	D3K	D3K	D3K	D3K	D3K	UNIT
		6005	601	602	604	606	608	610	
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Output Current @ T <sub>c</sub> =90°C (with heatsink) @ T <sub>c</sub> =90°C (without heatsink)	I <sub(av)< sub=""></sub(av)<>	6.0 3.0							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I <sub>FSM</sub>	150							A
Maximum Forward Voltage at 6.0A DC	V <sub>F</sub>	1.1							V
I <sup>2</sup> t Rating for Fusing (t<8.3ms)	I <sup>2</sup> t	93.375							A <sup>2</sup> s
Maximum Typical Thermal Resistance	R <sub>θJA</sub> R <sub>θJL</sub>	55 15							°C/W
Maximum DC Reverse Current @ T <sub>a</sub> =25°C at Rated DC Blocking Voltage @ T <sub>a</sub> =125°C	I <sub>R</sub>	10 500							μA
Operating Temperature Range	T <sub>J</sub>	-55 to +150							°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +150							°C

RATING AND CHARACTERISTIC CURVES D3K6005 THRU D3K610

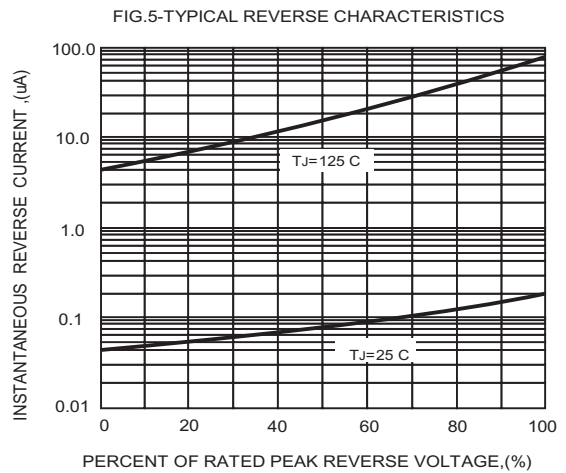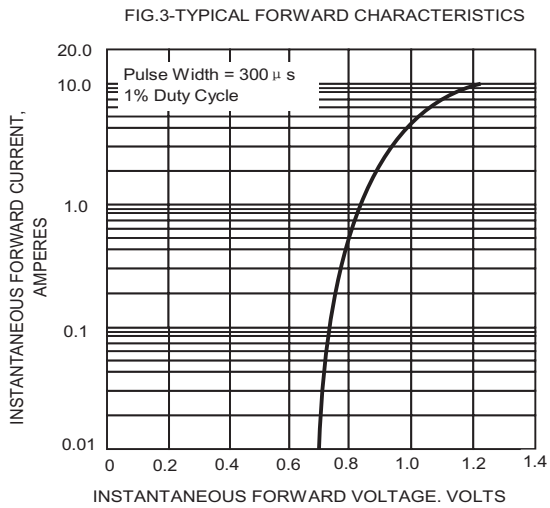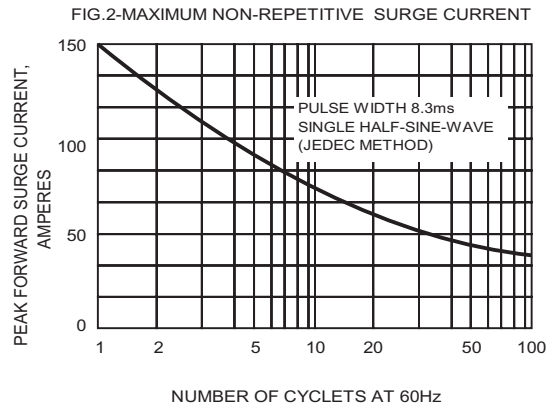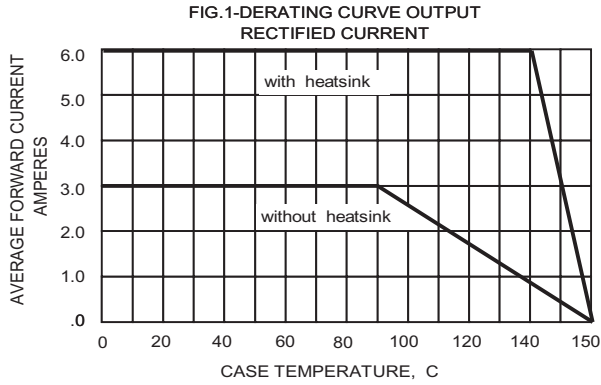

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bridge Rectifiers](#) category:*

*Click to view products by [Jing Heng](#) manufacturer:*

Other Similar products are found below :

[G3SBA60-E351](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DF10SA-E345](#) [RMB2S](#) [RCG](#) [APT30DF100HJ](#) [APT60DF20HJ](#) [B2S-E3/80](#) [BU1506-E351](#) [BU15085S-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [RS404GL-BP](#) [RS405GL-BP](#) [G3SBA20-E3/51](#) [G5SBA20-E3/51](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBL02-E351](#) [GBL10-E3/45](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU4K-BP](#) [GBU8B-E3/45](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [MB1510](#) [MB352W](#) [MB6M-G](#) [B2M-E345](#) [B40C7000A](#) [B500C7000A](#) [MP5010W-BP](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BU1006-E345](#) [BU12065S-E3/45](#) [BU1508-E3/51](#) [BU2006-E3/45](#) [BU2008-E345](#)