

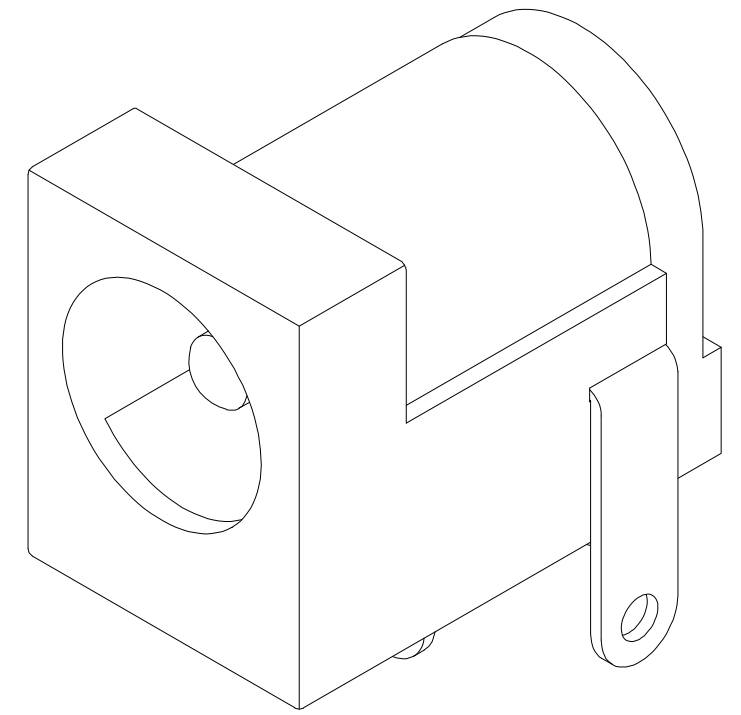
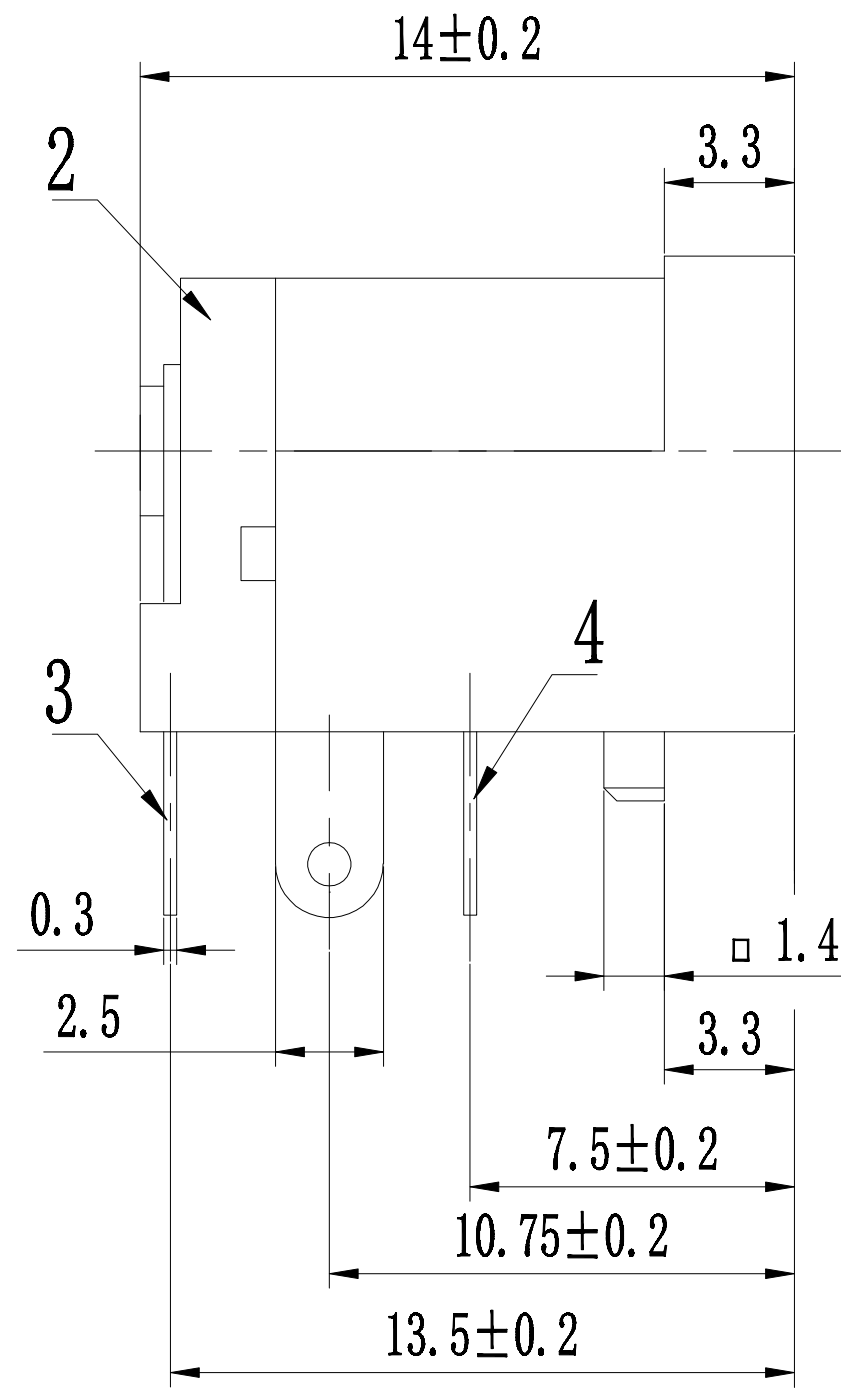


PCB安装孔图

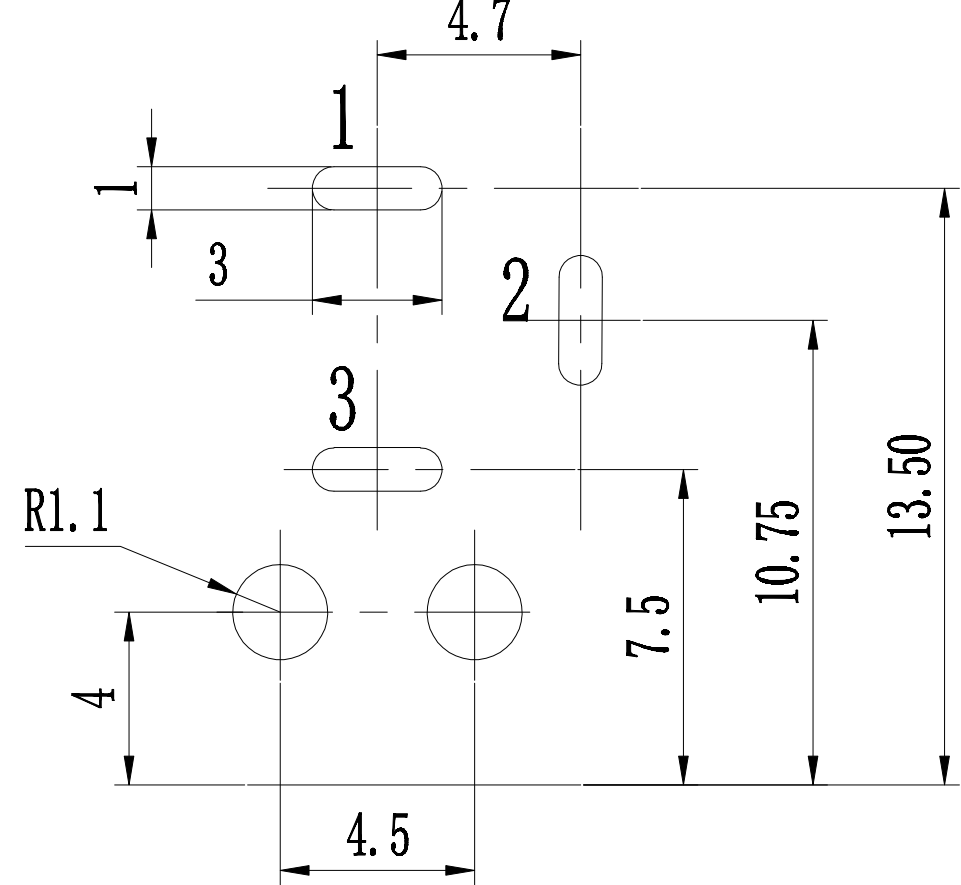

电路图

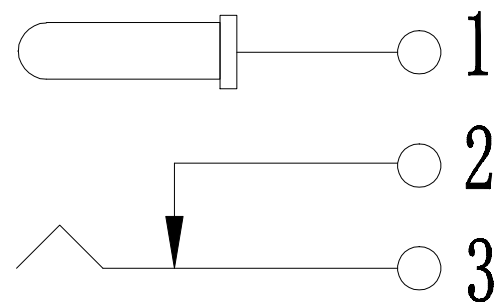

| 序号 | 名称  | 材料          | 数量 | 镀层/颜色 | 备注 |
|----|-----|-------------|----|-------|----|
| 6  | 轴芯  | H65 ∅2.0    | 1  | Ag    | ※  |
| 5  | 静片  | H62Y        | 1  | Ag    | ※  |
| 4  | 动片  | QSn6.5-0.1Y | 1  | Ag    | ※  |
| 3  | 接地片 | H62Y        | 1  | Ag    | ※  |
| 2  | 盖板  | PBT         | 1  | 黑色    | ※  |
| 1  | 基座  | PBT         | 1  | 黑色    | ※  |

**深圳金佳润电子科技有限公司**  
 金佳 Shenzhen JinJiaRun Electronics Technology Co., Ltd

DC插座  
外形图

|    |     |    |          |      |               |         |    |
|----|-----|----|----------|------|---------------|---------|----|
| 设计 | 胡正特 | 日期 | 2014.5.6 | 产品名称 | 2.0 DC电源座 带定位 |         |    |
| 审核 | 朱于静 | 日期 | 2014.5.6 |      | 产品料号          | DC+02IA |    |
| 批准 | 管奎  | 日期 | 2014.5.6 | 页码   |               | 1 OF 1  | A4 |
| 比例 | 3:1 | 单位 | mm       |      |               |         |    |

| 变更单号 | 版本  | 日期 | 内容描述 | 变更 | 审核 | 批准 | 未注公差  |
|------|-----|----|------|----|----|----|---|
|      | A/0 |    |      |    |    |    | 角度 ±3°<br>>30~ ±0.35<br>>10~30 ±0.25<br>~10 ±0.15 |

## SPECIFICATION 规格书

|   |                               |   |  |
|---|-------------------------------|---|--|
| <b>Model Type:</b><br><b>类型型号:</b>  | <b>DC POWER JACK</b>          |   |  |
| <b>1. Scope/适用范围</b>  |                               |   |  |
| This specification applies to DC POWER JACK which is used in the electronic products.<br>本规格书适用于电子产品上的电源插座连接器。                              |                               |   |  |
| <b>2. Rated / 额定值</b>   |                               |   |  |
| 2-1. Practical temperature range: -20°C to +70°C<br>适用温度范围: -20°C to +70°C<br>Humidity range: 85% RH. MAX.<br>湿度范围: 85% RH. MAX.            |                               |   |  |
| 2-2. Preservation temperature range: -10°C to +40°C<br>保存温度范围: -10°C 至 +40°C<br>Humidity range: 85% RH. MAX.<br>湿度范围: 85% RH. MAX.          |                               |   |  |
| 2-3. Rated voltage and current (MAX.): 30V DC , 2A<br>最大额定电压和额定电流: 30V DC , 2A  |                               |   |  |
| 2-4. Appearance : No scratches、soil、rust or discoloration on the surface.<br>外观: 表面无划伤、脏污、生锈或变色等现象。   |                               |   |  |
| <b>3. Construction / 说明</b>   |                               |   |  |
| 3-1. Outline And Dimension / 外观和尺寸<br>The appearance and dimensions of the socket should match the attachment drawing.<br>插座的外观和尺寸应与附件图纸相符。 |                               |   |  |
| 3-2. Part And Material 部件和材料<br>Parts and materials should be consistent with the material list specifications.<br>部件和材料应与材料清单规格一致。         |                               |   |  |
| <b>4. Electrical efficiency / 电气特性</b>  |                               |   |  |
| Item<br>项目  | Property<br>特性                | Test condition<br>测试条件  | Performance<br>判定                                |
| 4-1   | Withstand Voltage<br>耐电压      | Withstand AC 500V (50/60Hz RMS) between two non-contact terminals for 1 minute<br>在两个不接触的端子之间, 能承受交流500V (50/60Hz RMS) 并持续1分钟。  | No dielectric breakd own shall occur.<br>无击穿现象发生 |
| 4-2   | Insulation Resistance<br>绝缘阻抗 | Apply 500V DC between any contactless terminal and the other terminal, with an insulation gauge and last for 1 minute ± 5 seconds.<br>在任何一个不接触的端子与另一个端子之间施加500V直流电, 用绝缘测量仪, 并能持续1分钟 ± 5秒。 | 100 MΩ Min.<br>最小100 兆欧                          |

## SPECIFICATION 规格书

|                             |                      |
|-----------------------------|----------------------|
| <b>Model Type:</b><br>类型型号: | <b>DC POWER JACK</b> |
|-----------------------------|----------------------|

| Item<br>项目 | Property<br>特性                | Test condition<br>测试条件  | Performance<br>判定    |
|------------|-------------------------------|---|----------------------|
| 4-3        | Contact<br>Resistance<br>接触阻抗 | Take a pair of matched terminals and measure the tail end of each terminal (voltage maximum 20mV, current maximum 100mA)<br><br>取一对匹配好的端子，测量各端子的尾端点 (电压最大 20mV，电流最大 100mA)。 | 30 mΩ MAX.<br>最大30毫欧 |

### 5. Mechanical Performance 机械特性

| Item<br>项目 | Property<br>特性                               | Test condition<br>测试条件   | Performance<br>判定   |
|------------|--|--|---|
| 5-1        | Insertion and<br>Extraction Force<br>插入力&拔出力 | Plug and unplug with a matching plug at a frequency of 20-30 times per minute.<br><br>用相匹配的插头以每分钟 20-30 次的频率均速插头进行插拔。  | Insertion and extraction force is 0.3~ 3kgf<br>插入和拔出力值为 0.3 ~ 3kgf.                                       |
| 5-2        | Terminal<br>Strength<br>端子强度                 | Every terminal should be capable of withstand a force of 0.5 kgf for 10 seconds.<br><br>每个端子都应能承受 0.5 kgf 的力，并持续 10 秒。 | There is no looseness, damage, etc., but the terminal deformation is acceptable.<br>无松脱、破损等现象，但是端子变形可以接受。 |

### 6. Durability / 耐久性能

| Item<br>项目 | Property<br>特性    | Test condition<br>测试条件  | Performance<br>判定  |
|------------|-------------------|---|--|
| 6-1        | Life test<br>寿命试验 | Under the condition of no load, plug and unplug with a matching plug for 5000 times in total, at a frequency of 20-30 times per minute.<br><br>在没有负载的条件下，以每分钟20-30次的频率，均速，用相匹配的插头进行插拔5000次。 | No obvious change in appearance, destruction.<br>Contact resistance: less than 30 mΩ.<br>The insertion and extraction force values : 0.3 to 3 kgf.<br>外观无明显改变,破坏.<br>接触电阻: 小于 30 毫欧.<br>插入和拔出力值为 0.3 ~ 3kgf. |

## SPECIFICATION 规格书

|                             |               |
|-----------------------------|---------------|
| <b>Model Type:</b><br>类型型号: | DC POWER JACK |
|-----------------------------|---------------|

### 7. Solderability / 焊锡试验


| Item<br>项目 | Property<br>特性                      | Test condition<br>测试条件   | Performance<br>判定   |
|------------|-------------------------------------|--|---|
| 7-1        | Resistance to soldering heat<br>耐焊性 | The jack terminal should be dipped in solder under the condition as specified below:<br>Temperature of solder: $260 \pm 3^{\circ}\text{C}$ .<br>Dip time: $5 \pm 1$ seconds.<br><br>端子浸入锡炉里, 按以下条件测试:<br>焊锡温度: $260^{\circ}\text{C} \pm 3^{\circ}\text{C}$ .<br>浸入时间: $5 \pm 1$ 秒. | After the test, the plastic base should not be deformed and the terminals should not fall off the plastic base.<br>试验后塑胶基座不应变形, 端子不从塑胶基座上脱落下来 |
| 7-2        | Solderability<br>可焊性                | Temperature of solder: $245 \pm 3^{\circ}\text{C}$ .<br>Time of dip: $3 \pm 0.5$ seconds.<br><br>焊锡温度: $245 \pm 3^{\circ}\text{C}$ .<br>浸入时间: $3 \pm 0.5$ 秒  | Coating of solder area should be more than 95%<br>焊锡面积要求达到95%以上   |

### 8. Environment test / 环境试验

| Item<br>项目 | Property<br>特性    | Test condition<br>测试条件   | Performance<br>判定   |
|------------|-------------------|--|---|
| 8-1        | Cold test<br>低温测试 | Place the housing for 96 hours at a low temperature of $-25 \pm 3^{\circ}\text{C}$ .<br>Then, place it under standard atmospheric conditions for 1 hour and test.<br><br>在 $-25 \pm 3^{\circ}\text{C}$ 低温条件下将基座放置96小时, 再在标准大气条件下放置1小时, 然后再测试。              | No obvious change in appearance<br>Contact resistance: $100\text{m}\Omega$ max.<br>Insulation resistance: $100\text{M}\Omega$ min.<br>Withstand voltage: AC 500V. |
| 8-2        | Heat test<br>高温测试 | The housing should be stored at a temperature of $85 \pm 2^{\circ}\text{C}$ for 96 hours.<br>Then it should be subjected to standard atmospheric conditions for 1 hour and test<br><br>在 $85 \pm 2^{\circ}\text{C}$ 高温条件下将基座放置96小时, 再在标准大气条件下放置1小时, 然后再测试。 | 外观没有明显的改变。<br>接触电阻: 小于 100 毫欧。<br>绝缘阻抗: 大于 100 兆欧。<br>耐电压: AC 500V.   |

## SPECIFICATION 规格书

|                             |                      |
|-----------------------------|----------------------|
| <b>Model Type:</b><br>类型型号: | <b>DC POWER JACK</b> |
|-----------------------------|----------------------|
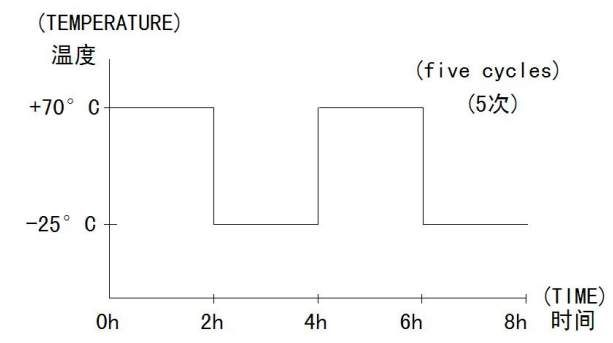
| Item<br>项目 | Property<br>特性              | Test condition<br>测试条件  | Performance<br>判定  |
|------------|-----------------------------|---|--|
| 8-3        | Humidity test<br>耐湿试验       | <p>The housing should be stored at a temperature of <math>40 \pm 3^{\circ}\text{C}</math> with relative humidity of 90% ~ 95% for 96 h. Then it should be subjected to standard atmospheric conditions for 1 hour and test</p> <p>在温度为 <math>40 \pm 3^{\circ}\text{C}</math>，相对湿度为 90%~95% 条件下，将基座放置 96 小时，再在标准大气条件下放置 1 小时，然后再测试。</p>                                    | <p>No obvious change in appearance</p> <p>Contact resistance: <math>100\text{m}\Omega</math> max.</p> <p>Insulation resistance: <math>100\text{M}\Omega</math> min. Withstand voltage: AC 500V.</p> <p>外观没有明显的改变。</p> <p>接触电阻：小于 100 毫欧。</p> <p>绝缘阻抗：大于 100 兆欧。</p> <p>耐电压： AC 500V。</p> |
| 8-4        | Temperature Cycling<br>温度循环 | <p>Place the Jack under the conditions shown below and then place it in the stand at room temperature for 30 minutes.</p> <p>将插座放置于如下所示条件下进行试验，然后在室温条件下放置 30 分钟。</p> <div style="text-align: center;"> <p>(TEMPERATURE)</p>  <p>(five cycles)<br/>(5次)</p> <p>(TIME)<br/>时间</p> </div> |  |


## SPECIFICATION 规格书

| <b>Model Type:</b><br>类型型号:   |                         | <b>DC POWER JACK</b>   |  |
|---|-------------------------|--|--|
| Item<br>项目  | Property<br>特性          | Test condition<br>测试条件   | Performance<br>判定                                      |
| 8-6   | Salt spray test<br>盐雾测试 | Temperature: 35 ± 2°C<br>Solution: 5 ± 1%<br>Spray time: 24hours<br>Wash and dry it at room temperature after the experiment.<br><br>温度35±2°C 盐水浓度 5±1% 盐雾时间24小时。实验后常温水洗，室温干燥。 | No obvious rust in the appearance.<br><br>外观没有明显的生锈现象。 |
| <b>9. Test condition / 测试条件</b><br>Unless otherwise specified, the test and measurement temperature is between 15 ° C and 35 ° C, the relative humidity is between 25% and 85%, and the atmospheric pressure is between 86 kPa and 106 kPa.<br><br>However, when any doubts arise on the judgment value under the above condition, the test and measurement are carried out at 20±1 ° C, the relative humidity is 63% to 67%, and the air pressure is performed at 86 kPa to 106 kPa.<br>除非另有指定，否则测试和测量温度在 15°C~35°C，相对湿度在 25%~85%，气压在 86kPa~106kPa 条件下进行。<br>当在这个条件下判定出现疑问时，测试和测量在 20±1°C，相对湿度 63%~67%，气压在 86kPa~106kPa 条件下进行。 |                         |  |  |
| <b>10. Amendment / 变更修正</b><br>When it is necessary to amend the specifications, it should be negotiated and agreed by the manufacturer and the customer before proceeding.<br>当有必要对规格书进行变更修正时，应该在制造商和客户共同商议及同意后才可以进行。  |                         |  |  |

## SPECIFICATION 规格书

Model Type: DC POWER JACK  
类型型号:

### 11. Standard dimension of gauge plug / 标准插头尺寸

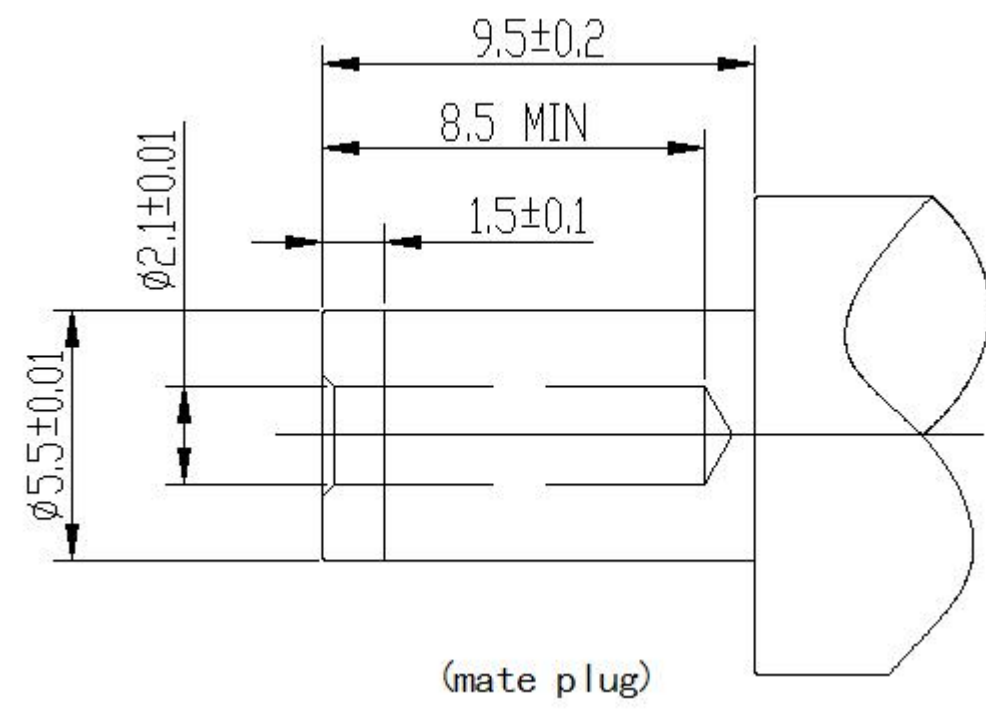

※ Specifications are recorded in both English and Chinese, but Chinese is preferred in the case of doubts.  
规格书同时记入中英文, 但发生疑义的场所以中文优先。

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [jinjia](#) manufacturer:*

Other Similar products are found below :

[XLR-04P-3](#) [XLR-15-N3GR](#) [XLR-25-1](#) [XLR-18-2-N3B](#) [CK6.35-3+15A-17](#) [0.5S-CX-9PWB](#) [XLR-04-2](#) [USB-02-B-1B](#) [XLR-11WP-N3B](#)  
[XLR-14W](#) [XLR-18P-N3B](#) [XLR-25-N3B](#) [XLR-18-3-N3B](#) [XLR-23B](#) [XLR-11P-N3B](#) [XLR-15-N3G](#) [CK6.35-3+15-6](#) [CK6.35-3+14B](#) [XLR-16AP-N3B](#) [0.5S-4S-28PWT-0.71R](#) [USB04-212-17-10B](#) [XLR-14-N3B](#) [XLR-15-N3B](#) [XLR-16AP-2-N3B](#) [CK3.5-144](#) [CK6.35-3+15-8A](#) [DC-09W](#) [XLR-04WP-1](#) [XLR-11W-N3B](#) [XLR-18-2-N3GR](#) [CK3.5-63](#) [0.5S-CX-10PWB](#) [0.5S-CX-13PWB](#) [CK3.5-20-1](#) [XLR-18P-3-N3B](#) [XLR-23](#) [XLR-25-1-N3GR](#) [XLR-04W-1](#) [XLR-16A-2-N3B](#) [XLR-04WP](#) [XLR-15-N3L](#) [DC-09-1LF](#) [XLR-11-N3B](#) [XLR-16A-1-N3B](#) [XLR-19-7P](#)  
[XLR-04-3-N3B](#) [XLR-18-N3B](#) [XLR-19P-11P](#) [XLR-19P-7P](#) [CK6.35-3-20-2](#)