

## Performance Specification

Model	I <sub>H</sub> (A)	I <sub>T</sub> (A)	V <sub>max</sub>	I <sub>max</sub>	P <sub>d</sub>	Maximum Time-to-Trip		Resistance (mΩ)	
			V <sub>(DC)</sub>	A	W	Current (A)	Time (S)	R <sub>min</sub>	R <sub>max</sub>
JK16-010(T)	0.1	0.3	16	100	0.38	0.5	5	1500	7500
JK16-025(T)	0.25	0.5	16	100	0.45	1.25	5	500	1950
JK16-030(T)	0.3	0.6	16	100	0.49	1.5	5	300	700
JK16-050(T)	0.5	1.0	16	100	0.56	2.5	5	200	500
JK16-075(T)	0.75	1.5	16	100	0.72	3.75	5	100	320
JK16-090(T)	0.9	1.8	16	100	0.83	4.5	5	90	180
JK16-110(T)	1.1	2.2	16	100	0.94	5.5	5	60	150
JK16-135(T)	1.35	2.7	16	100	1.2	6.75	5	40	130
JK16-160(T)	1.6	3.2	16	100	1.4	8	5	40	110
JK16-200(T)	2	4	16	100	2.2	6	15	35	75
JK16-300	3	6	16	100	2.3	9	15	20	60
JK16-400	4	8	16	100	2.4	12	15	20	40
JK16-500	5	10	16	100	2.6	15	15	14	25
JK16-600	6	12	16	100	2.8	18	15	10	21
JK16-700	7	14	16	100	3.0	21	15	8	15
JK16-800	8	16	16	100	3.0	24	15	6	13
JK16-900	9	18	16	100	3.3	27	25	4	12
JK16-1000	10	20	16	100	3.7	30	30	4	11
JK16-1100	11	22	16	100	3.7	33	30	3	9
JK16-1200	12	24	16	100	4.2	36	30	3	8
JK16-1300	13	26	16	100	4.2	39	50	3	8
JK16-1400	14	28	16	100	4.2	40	50	3	7

I<sub>H</sub>=Hold current:Maximum current at which the device will not interrupt in 25°C still air.

I<sub>T</sub>=Trip current:Minimum current at which the device from low resistance to high resistance in 25°C still air.

V<sub>max</sub>=Maximum continuous voltage device can withstand without damage at rated current.

I<sub>max</sub>=Maximum fault current device can withstand without damage at rated voltage.

Maximum Time-to-trip:Maximum time to trip at assigned current.

P<sub>d</sub>=Typical power dissipation:Typical amount of power dissipated from the device when in 25°C still air environment.

R<sub>min</sub>=Minimum resistance of device at 25°C prior to tripping.

R<sub>max</sub>=Maximum resistance of device at 25°C prior to tripping.


## Environmental Specifications

Test	Conditions	Resistance change
Passive Aging	+85°C, 1000hours	≤R <sub>max</sub>
Humidity Aging	+85°C, 85%R.H.1000hours	≤R <sub>max</sub>
Thermal Shock	+125°C to -55°C, 10 Times	≥R <sub>min</sub>
Solvent Resistance	MIL-STD-202, Method 215F	No change
Vibration	MIL-STD-202, Method 201	No change


**Agency Approval and Environmental Compliance**

Agency	File Number	Regulation
UL	pending	
TUV	pending	 <b>TÜVRheinland®</b> Precisely Right. No. R 50108769


**Thermal Derating Curve**

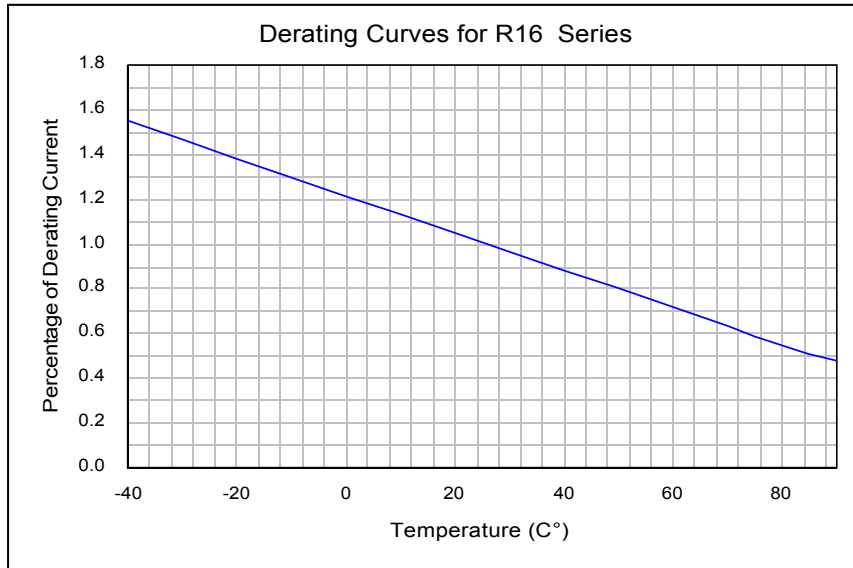

**Average Time-Current Curve**

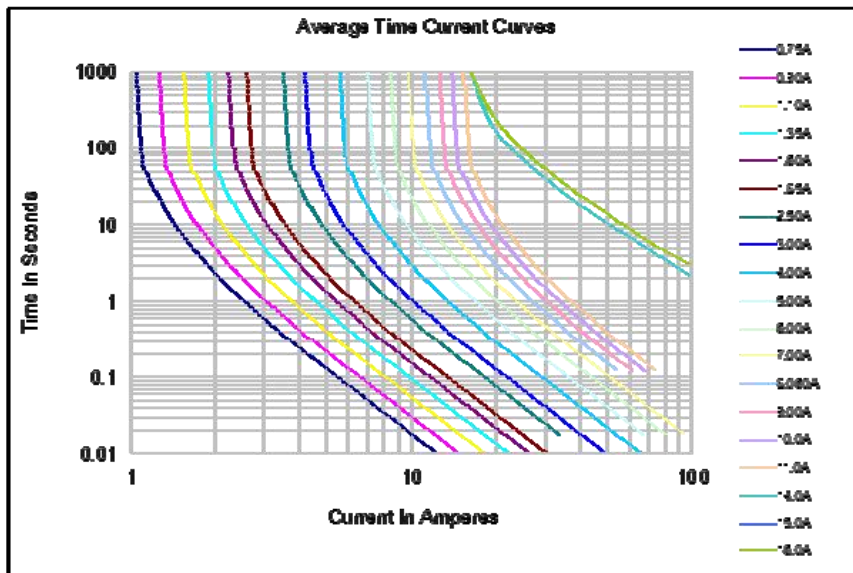

## Soldering Parameters

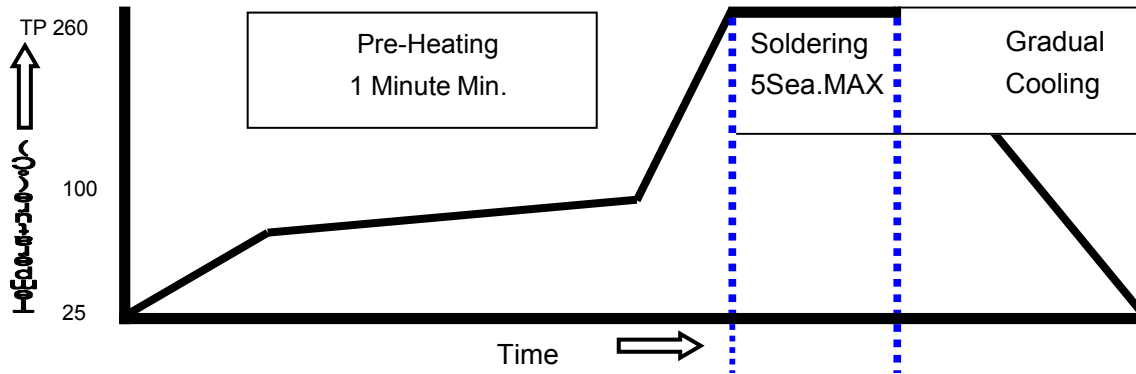

WAVE SOLDERING INFORMATIONS	
Pre-Heating Zone	Max. ramping rate should not exceed 4°C/Sec.
Soldering Zone	Max. solder temperature should not exceed 260°C
Cooling Zone	Cooling by natural convection in air.
© Specifications are subject to change without notice.	

## Physical Dimensions(mm.)




Fig.1




Fig.2

Unit : mm  
JK16 Series

Model	Dimensions (mm)					Lead material	Shape
	A(max)	B(max)	C(max)	D	E(min)	Tinned metal(mm)	Fig
JK16-010(T)	5.5	12.0	3.0	5.1±0.75	4.6	24 AWG/Φ0.5	1
JK16-025(T)	5.5	12.0	3.0	5.1±0.75	4.6	24 AWG/Φ0.5	1
JK16-030(T)	5.5	12.0	3.0	5.1±0.75	4.6	24 AWG/Φ0.5	1
JK16-050(T)	5.5	12.0	3.0	5.1±0.75	4.6	24 AWG/Φ0.5	1
JK16-075(T)	7.4	13.5	3.0	5.1±0.75	4.6	24 AWG/Φ0.5	1
JK16-090(T)	7.4	13.5	3.0	5.1±0.75	4.6	24 AWG/Φ0.5	1
JK16-110(T)	7.4	13.5	3.0	5.1±0.75	4.6	24 AWG/Φ0.5	1
JK16-135(T)	7.4	13.5	3.0	5.1±0.75	4.6	24 AWG/Φ0.5	1
JK16-160(T)	7.4	14.0	3.0	5.1±0.75	4.6	24 AWG/Φ0.5	1
JK16-200(T)	9.0	12.0	3.0	5.1±0.75	7.6	24 AWG/Φ0.5	2
JK16-300	9.0	12.0	3.0	5.1±0.75	4.6	20 AWG/Φ0.8	2
JK16-400	10.0	13.0	3.0	5.1±0.75	7.6	20 AWG/Φ0.8	2
JK16-500	11.8	17.5	3.0	5.1±0.75	7.6	20 AWG/Φ0.8	2
JK16-600	13.5	17.5	3.0	5.1±0.75	7.6	20 AWG/Φ0.8	2
JK16-700	13.5	23.0	3.0	5.1±0.75	7.6	20 AWG/Φ0.8	2
JK16-800	13.5	23.0	3.0	5.1±0.75	7.6	20 AWG/Φ0.8	2
JK16-900	15.0	24.0	3.0	5.1±0.75	7.6	20 AWG/Φ0.8	2
JK16-1000	18.0	26.0	3.0	5.1±0.75	7.6	20 AWG/Φ0.8	2

## JK16 Series Surface Mount PTC Devices

JK16-1100	18.0	26.0	3.0	5.1±0.75	7.6	20 AWG/Φ0.8	2
JK16-1200	22.5	26.0	3.0	10.2±0.75	7.6	20 AWG/Φ0.8	2
JK16-1300	24.0	30.0	3.0	10.2±0.75	7.6	20 AWG/Φ0.8	2
JK16-1400	24.0	30.0	3.0	10.2±0.75	7.6	20 AWG/Φ0.8	2

Note: Dimensions in the A, B, C are the maximum sizes, all typical values of D is at the tolerance of ± 0.75mm.

### Thermal Derating Chart-IH (A)

Model	Maximum ambient operating temperature (°C)									
	-40°C	-20°C	0°C	25°C	30°C	40°C	50°C	60°C	70°C	85°C
JK16 series	147%	132%	120%	100%	90%	88%	80%	71%	61%	47%

### PHYSICAL SPECIFICATIONS

JK16-010(T)~JK16-600 1000Pcs/Bag or 2000Pcs/Box  
 JK16-700~JK16-900 500 Pcs/Bag  
 JK16-1000~JK16-1400 200 Pcs/Ba

Website: <http://www.jksemit.com>

For additional information, please contact your local Sales Representative.

©Copyright 2021, jksemit



is a registered trademark of jksemit All rights are reserved

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Resettable Fuses - PPTC](#) category:*

*Click to view products by [Jinkaisheng](#) manufacturer:*

Other Similar products are found below :

[RF0077-000](#) [RF0627-000](#) [RF3301-000](#) [RF3382-000](#) [SMD125-2](#) [RF1973-000](#) [RF2531-000](#) [RF2873-000](#) [RF3060-000](#) [TR600-150Q-B-0.5-0.130](#) [RXE090](#) [5E4795/04-1502](#) [TRF250-080T-B-1.0-0.125](#) [SMD100-2](#) [NIS5431MT1TXG](#) [SMD250-2](#) [RS30-090](#) [RS30-600](#) [RS30-800](#) [RS30-900](#) [RS60RB-160](#) [RS60SB-250](#) [SB250-145](#) [0ZCH0110AF2E](#) [0603L001/60YR](#) [0603L003/36YR](#) [BK250-120-SZ-E0.6](#) [BK60-010-DI-E0.5](#) [BK250-040-DY-E0.6](#) [RF2631-000](#) [NIS5420MT2TXG](#) [NIS5420MT3TXG](#) [NIS6420MT1TWG](#) [RF5032-000](#) [RF5051-000](#) [RF5034-000](#) [RF5105-000](#) [RF5062-000](#) [RF5055-000](#) [RF5052-000](#) [2920L075/72MR](#) [BSMD0603-025-24V](#) [BSMD0402L-005](#) [BSMD0603-010-9V](#) [BSMD1812-020-60V](#) [BSMD2920-400-30V](#) [BSMD0603-010-12V](#) [BSMD0805-035-30V](#) [BSMD1210-150-16V](#) [BSMD0805-003-60V](#)