

Performance Specification

Model	I _{hold}	I _{trip}	V _{max}	I _{max}	P _d	Maximum Time		Resistance		
						To Trip		R _{i min.}	R _{i max.}	R _{1 max}
	(A)	(A)	(Vrms)	(A)	(Sec)	(Ω)	(Ω)			
	(A)	(A)	(Vrms)	(A)	(Sec)	(Ω)	(Ω)	(Ω)		
JK600-050U	0.050	0.150	500	3.0	1.00	3.00	7.00	15.00	40.00	60.00
JK600-110U	0.110	0.220	600	3.0	1.00	3.00	8.00	6.00	16.00	24.00
JK600-150U	0.150	0.300	600	3.0	1.00	3.00	9.00	5.00	14.00	22.00
JK600-160U	0.160	0.320	600	3.0	1.00	3.00	10.00	4.00	12.00	18.00
JK600-200U	0.200	0.400	600	3.0	1.00	3.00	15.00	5.00	13.00	24.00

V_{max} = Maximum operating voltage device can withstand without damage at rated current (I_{max}).

I_{max} = Maximum fault current device can withstand without damage at rated voltage (V_{max}).

I_{hold} = Hold Current. Maximum current device will not trip in 25°C still air.

I_{trip} = Trip Current. Minimum current at which the device will always trip in 25°C still air.

P_d = Power dissipation when device is in the tripped state in 25°C still air environment at rated voltage.

R_{i min/max} = Minimum/Maximum device resistance prior to tripping at 25°C.



R_{1 max} = Maximum device resistance is measured one hour post reflow.

CAUTION : Operation beyond the specified ratings may result in damage and possible arcing and flame.


Environmental Specifications

Test	Conditions	Resistance change
Passive aging	+85°C, 1000 hrs.	±5% typical
Humidity aging	+85°C, 85% R.H. , 168 hours	±5% typical
Thermal shock	+85°C to -40°C, 20 times	±33% typical
Resistance to solvent	MIL-STD-202, Method 215	No change
Vibration	MIL-STD-202, Method 201	No change
Ambient operating conditions : - 40 °C to +85 °C		
Maximum surface temperature of the device in the tripped state is 125 °C		


Agency Approval and Environmental Compliance

Agency	File Number	Regulation	Standard
UL	pending		2002/95/EC
TUV	pending		EN14582

Thermal Derating Curve

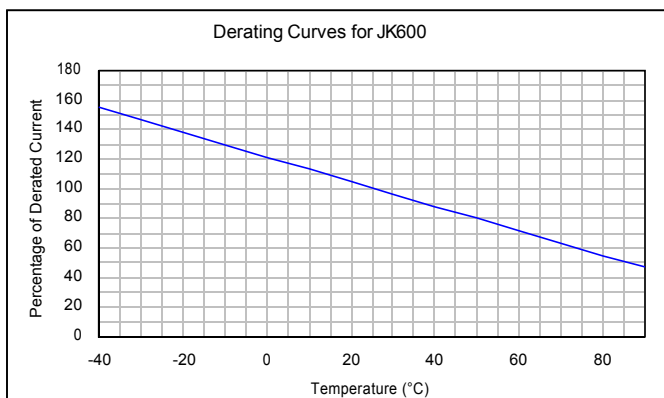


Average Time-Current Curve

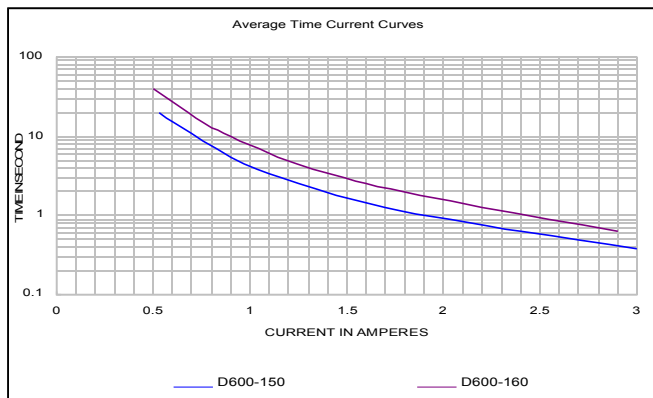

Hold Versus Temperature

Model	Maximum ambient operating temperature (T_{mao}) vs. hold current (I_{hold})								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
JK600-150U	0.233	0.206	0.178	0.150	0.124	0.110	0.096	0.083	0.062
JK600-160U	0.249	0.219	0.190	0.160	0.132	0.117	0.103	0.088	0.066


Soldering Parameters

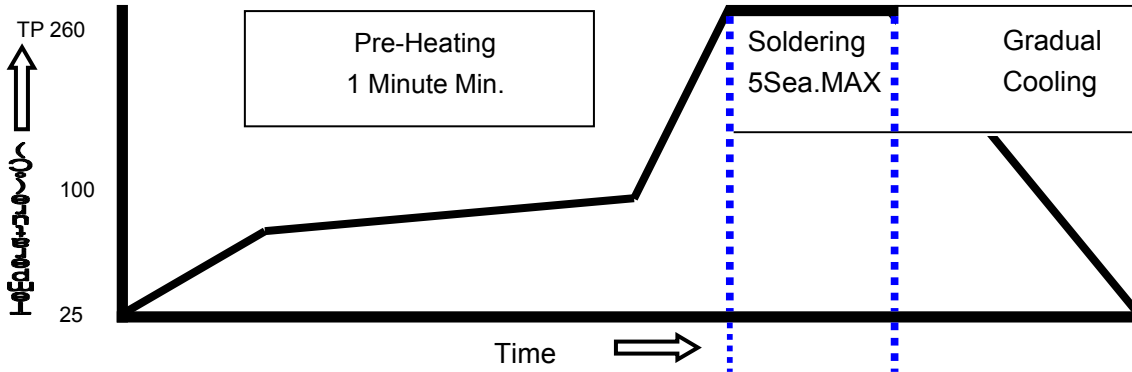

WAVE SOLDERING INFORMATION

Pre-Heating Zone	Max. ramping rate should not exceed 4°C/Sec.
Soldering Zone	Max. solder temperature should not exceed 260°C
Cooling Zone	Cooling by natural convection in air.
© Specifications are subject to change without notice.	

Physical Dimensions(mm.)

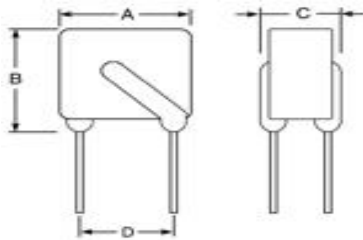

Model	A	B	C	D
	Max.	Max.	Max.	Typ.
JK600-050U	13.0	14.0	6.0	5.1
JK600-110U	14.0	14.0	6.0	5.1
JK600-150U	14.0	14.0	6.0	5.1
JK600-160U	14.0	14.0	6.0	5.1
JK600-200U	14.0	14.0	6.0	5.1

PHYSICAL SPECIFICATIONS :

Materials :

JK600-: Tin-plated copper, 22AWG, $\Phi 0.6\text{mm}$ (0.026 in). Lead

Solderability : MIL-STD-202, Method 208E

Packaging Quantity: 200pcs/Bag Q'ty

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Resettable Fuses - PPTC](#) category:

Click to view products by [Jinkaisheng](#) manufacturer:

Other Similar products are found below :

[RF0077-000](#) [RF0627-000](#) [RF3301-000](#) [RF3382-000](#) [RF3394-000](#) [RF3399-000](#) [SMD125-2](#) [RF1973-000](#) [RF2531-000](#) [RF2873-000](#) [RF3060-000](#) [RF3311-000](#) [TR600-150Q-B-0.5-0.130](#) [RXE090](#) [5E4795/04-1502](#) [TRF250-080T-B-1.0-0.125](#) [SMD100-2](#) [NIS5431MT1TXG](#) [SMD250-2](#) [RS30-090](#) [RS30-600](#) [RS30-800](#) [RS30-900](#) [RS60RB-160](#) [RS60SB-250](#) [SB250-145](#) [K30U400](#) [0ZCH0110AF2E](#) [BK60-110-DI-E0.6](#) [BK250-120-SZ-E0.6](#) [BK60-010-DI-E0.5](#) [BK250-040-DY-E0.6](#) [RF2631-000](#) [NIS4461MT3TXG](#) [NIS5420MT2TXG](#) [NIS5420MT3TXG](#) [NIS6420MT1TWG](#) [RF5032-000](#) [RF5051-000](#) [RF5105-000](#) [RF5062-000](#) [RF5055-000](#) [RF5052-000](#) [2920L075/72MR](#) [BSMD0603-025-24V](#) [BSMD0402L-005](#) [BSMD0603-010-9V](#) [BSMD1812-020-60V](#) [BSMD2920-400-30V](#) [BSMD0603-010-12V](#)