
PRODUCT DISPLAY




Front





Side

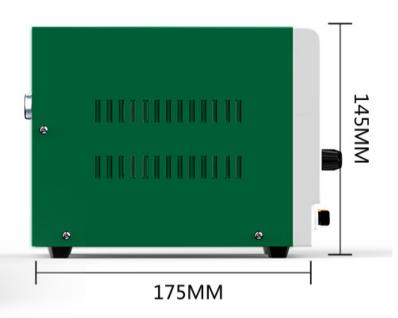


PRODUCT DETAILS

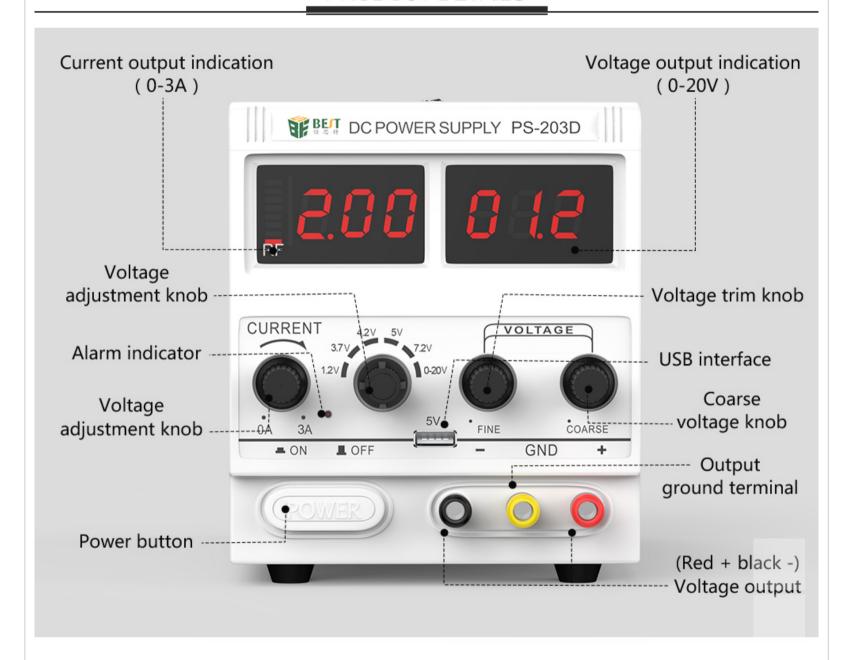

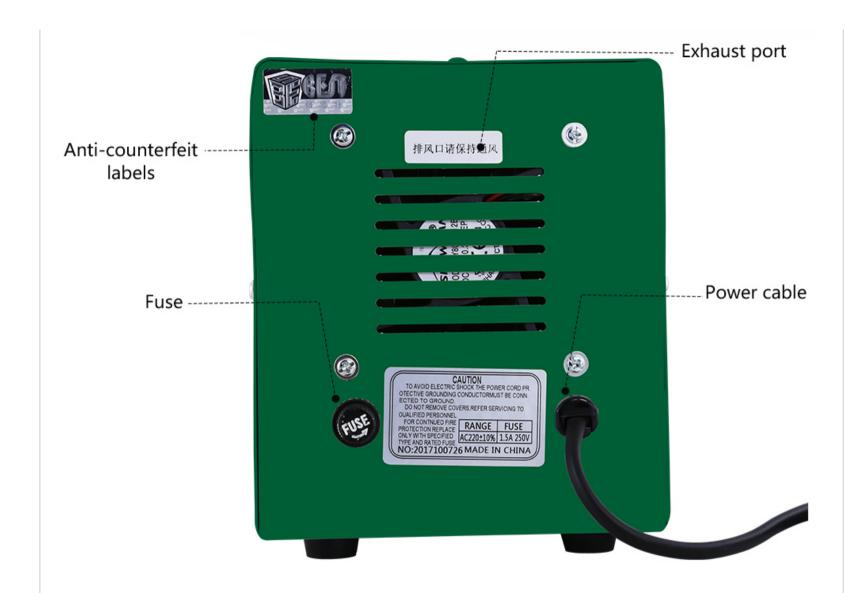

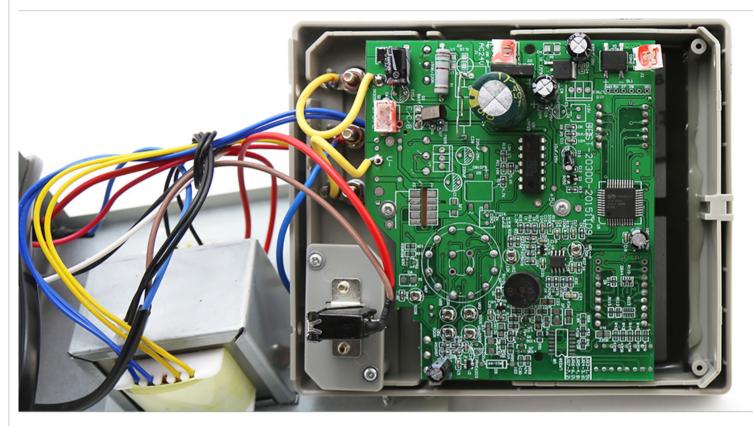

▲ PCB integrated motherboard double-sided chip technology

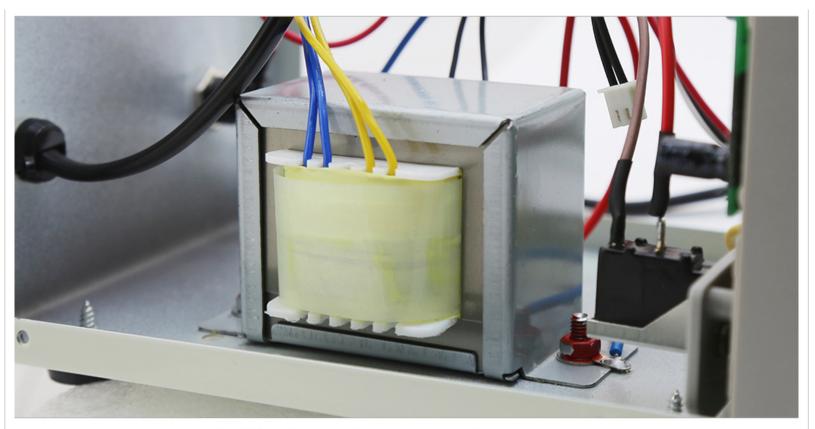

▲ High Power,Pure copper transformer

Rated working conditions			
voltage	220v ± 10%		
working environment	-10 °C ~ 40 °C Relative humidity: <90%		
Storage environment	-20 °C ~ 40 °C Relative humidity: <80%		
Corrugated factor	<= 0.5mvrs (5Hz-1MHz) Iomax> 1A		
Features	Short circuit protection / overload protection / alarm function / continuity test / automatic recovery		

Regulated working conditions

Power stability	<=0.01% + 2mV	
Load stability	<=0.01% + 2mV (1max<1A)	
Recovery Time	<=100us (maximum current <=3A)	


Specifications			
Model	PS-1502D+	PS-203D	
Body weight	1.6KG	2.2KG	
Dimensions	125MM*175MM*145MM		
Voltage and current	0-15V/0-2A	0-20V/0-3A	
Features	Short circuit protection, automatic recovery, voltage test, on-off test		
GSM signal detection	Can detect RF signals		
Overload protection current	2A		
Voltage display accuracy	0.1V		
Current display accuracy	0.01A		
Mobile signal strength indicator	Have		
Brush power supply function	No		
Smart cooling	No	Have	

WEIGHT: 2.2KG





Box 240mm*130mm*161mm



多功能直流稳压电源
REGULATED DC POWER SUPPLY
使用说明书 INSTRUCTION MANUAL

中文/English

CE 公

S能容明本产品,使用自康仔细阅读本评意,阅读后演误是保管,以使目后意观。
Thank you for purchasing this product, please ead this manual before using After read ft. please keep if for the future view.

Instructions



Power test line

标签: 五金工具

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Environmental Test Equipment category:

Click to view products by Jinliyang manufacturer:

Other Similar products are found below:

CW40 F150C10E3DRT F150LTC20 F150CD10E2 F150L75 F150LRS S-11 FLUKE-LDG 382153 FM100 RH210 382253 MO290-P

GEO-CABLE-REEL-50M T197914 RD300-L IR11BD IR11GM IR12GM IR21BD IR31CE IR32BC IR33BC MP7217TC NGM-1 SGX
7NH3 UT381 F150-SLC50 AW-CO-1000 AW-NmHc-100 3.000.401 AX-7535 CS-9S6SS-A P 2800 A P 2801 P 2802 P 5039 P 5130 P

5055 P 5060 P 5065 P 5086 P 5090 P 5110 P 5115 P 5135 P 5140 P 5145 P 5150 P 5160