


BAS16

SOT-23

FEATURES

- Fast Switching Speed
- For General Purpose Switching Applications •
- **High Conductance** •

Marking: A6





Maximum Ratings @T_A=25°C


Parameter	Symbol	Limits	Unit
Non-Repetitive Peak reverse voltage	V _{RM}	100	V
Peak Repetitive Peak reverse voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	75	V
RMS Reverse Voltage	V _{R(RMS)}	53	V
Forward Continuous Current	I _{FM}	300	mA
Average Rectified Output Current	lo	150	mA
Peak forward surge current @=1.0µs	I _{FSM}	2.0	А
@=1.0s		1.0	A
Power Dissipation	PD	225	mW
Thermal Resistance Junction to Ambient	$R_{ extsf{ heta}JA}$	556	°C/W
Junction temperature	Tj	150	°C
Storage temperature	T _{STG}	-55~+150	°C

ELECTRICAL CHARACTERISTICS (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Reverse breakdown voltage	V _{(BR) R}	I _R = 100μΑ	75		V
Reverse voltage leakage current	I _R	V _R =75V		1	μA
Forward voltage	V _F	I _F =1mA I _F =10mA I _F =50mA I _F =150mA		0.715 0.855 1 1.25	V
Diode capacitance	CD	V _R =0, f=1MHz		2	pF
Reveres recovery time	t _{rr}	$I_F=I_R=10mA, I_{rr}=0.1 \times I_{R,}$ $R_L=100\Omega$		6	nS

LEAD FREE CERTIFICATION ROHS ISOSOTION COMPLIANT SGS Date:2011/05



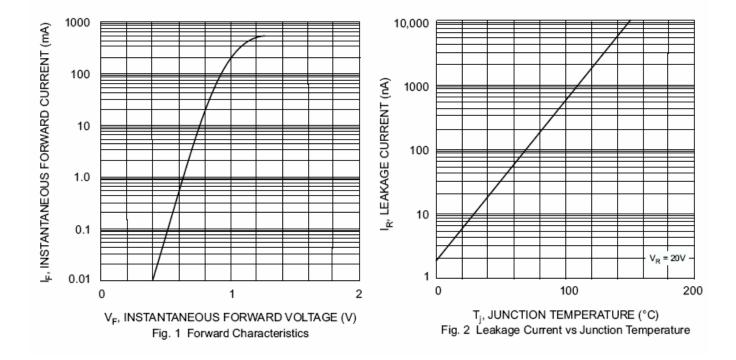



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by Jinyu manufacturer:

Other Similar products are found below :

MMBD3004S-13-F RD0306T-H BAV17-TR BAV19-TR 1N3611 NTE156A NTE574 NTE6244 1SS181-TP 1SS193,LF 1SS400CST2RA SDAA13 SHN2D02FUTW1T1G LS4151GS08 FC903-TR-E 1N4449 1N456A 1N4934-E3/73 1N914B 1N914BTR 1SS226-TP RFUH20TB3S D291S45T BAV300-TR BAW56DWQ-7-F BAW75-TAP MM230L-CAA IDW40E65D1 JAN1N3600 LL4151-GS18 053684A SMMSD4148T3G 707803H NSVDAN222T1G CDSZC01100-HF LL4150-M-08 BAV199E6433HTMA1 BAS28-7 BAW56HDW-13 BAS28 TR VS-HFA04SD60STR-M3 NSVM1MA152WKT1G RGP30D-E3/73 BAV99TQ-13-F BAS21DWA-7 NTE6250 NTE582-4 NTE582-6 MMDB30-E28X VS-HFA04SD60SL-M3