
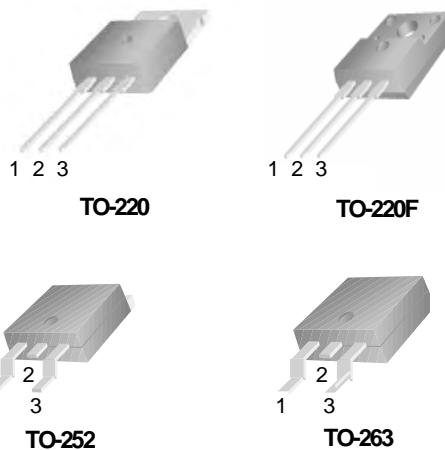


**APPLICATIONS**

- High frequency switch power supply
- Free wheeling diodes, polarity protection applications

**FEATURES**

- Common cathode structure
- Low power loss, high efficiency
- High Operating Junction Temperature
- Guard ring for overvoltage protection, High reliability
- RoHS product

**ORDER INFORMATION**

Product	Package	Pin Assignment			Packing
		1	2	3	
MBR10200CT	TO-220	A	K	A	Tube
MBR10200FCT	TO-220F	A	K	A	Tube
MBR10200YCT	TO-263	A	K	A	Tape Reel
MBR10200DCT	TO-252	A	K	A	Tape Reel

**ABSOLUTE RATINGS (T<sub>c</sub>=25°C)**

Parameter			Symbol	Value	Unit
Repetitive peak reverse voltage			V <sub>RRM</sub>	200	V
Maximum DC blocking voltage			V <sub>DC</sub>	200	V
Average forward current T <sub>c</sub> =150°C (TO-220/263/ TO-252) T <sub>c</sub> =125°C (TO-220F)	per device	per diode	I <sub>F(AV)</sub>	10	A
				5	
Surge non repetitive forward current 8.3 ms single half-sine-wave (JEDEC Method)			I <sub>FSM</sub>	144	A
Maximum junction temperature			T <sub>j</sub>	150	°C
Storage temperature range			T <sub>STG</sub>	-40~+150	°C




## ELECTRICAL CHARACTERISTICS

Parameter	Tests conditions		Value(min)	Value(typ)	Value(max)	Unit
$I_R$	$T_j = 25^\circ C$	$V_R = V_{RRM}$			10	$\mu A$
$V_F$	$T_j = 25^\circ C$	$I_F = 5A$		0.85	0.95	V

## THERMAL CHARACTERISTICS

Parameter	Symbol	Value(min)	Value(max)	Unit
Thermal resistance from junction to case	$R_{th(j-c)}$	2.0	2.0	$^\circ C/W$
			2.0	
			3.0	
			4.0	

## ELECTRICAL CHARACTERISTICS (curves)

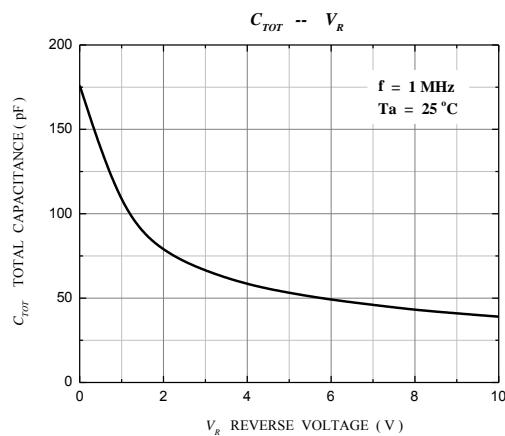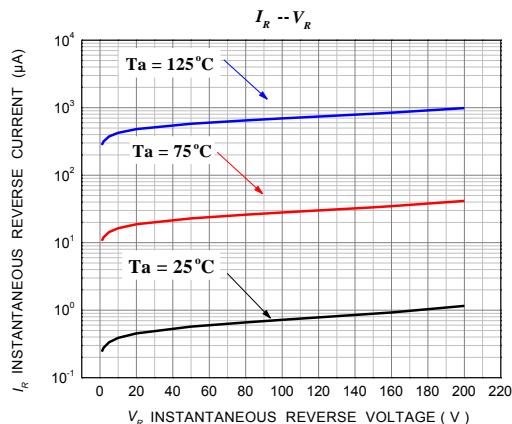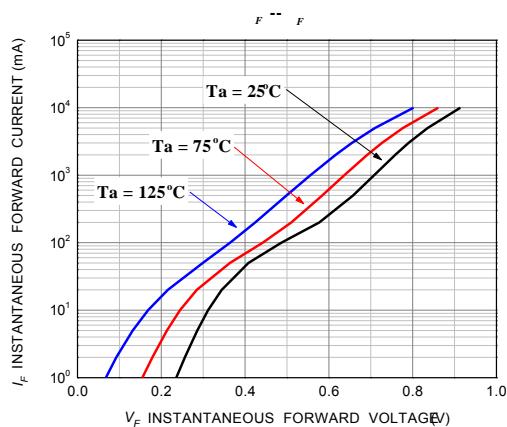

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Schottky Diodes & Rectifiers category:***

***Click to view products by Jinyu manufacturer:***

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)