

HIGH DENSITY LED FLEX RIBBON

Features

VOLTAGE: 24V DC
 CURRENT: 1440mA
 LED VIEWING ANGLE (2 θ 1/2): 120°

STANDARD PACKAGING:
 4 Meter Reel (480 LED's)

OPTIONAL PACKAGING:
 Individual 500mm Sections (60 LED's)
 Order as ZFS-84000-XX/SEC
 Note: Individual Sections ARE NOT supplied
 with insulated wire connection.



Maximum Ratings

Parameter	Symbol	Rating	Units
LED Junction Temperature	T _J	125	°C
Operating Temperature	T _{opr}	-30 ~ +85	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C
ESD Sensitivity	V _B	1000	V

Accessories

ZPS-2435 24V, 35 Watt Power Supply
 ZPS-2460 24V, 60 Watt Power Supply
 ZDM-01 PWM LED Dimmer

Note: ZPS-2435 and ZPS-2460 require
 use of wire nuts for connections.

Electro-Optical Characteristics (Ta = 25°C)

JKL Part Number	Color	Number of LED's	Input Voltage (V DC)	Power (W)	Current (mA)	Radiance Angle	CCT (K)	Lumen Flux (lm)
ZFS-84000-CW	Cool White	480	24	34.56	1440	120°	6000	2200
ZFS-84000-NW	Neutral White	480	24	34.56	1440	120°	4100	2070
ZFS-84000-WW	Warm White	480	24	34.56	1440	120°	3050	1940

Note

Please refer to JKL Application Sheet JKL-AS-ZFS-LED FLEX
 for Installation and Power Recommendations.



ATTENTION

OBSERVE PRECAUTION FOR
 HANDLING ELECTROSTATIC
 DISCHARGE SENSITIVE DEVICES


I	DELETE MATING COMPONENTS	1/6/14
H	CHANGE LUMEN FLUX NO'S	10/29/12
G	ADD ACCESSORIES & NOTES	8/22/11
F	ADD WIRE TYPE AND SIZE	6/27/11
E	NEW LAYOUT & PHOTO	5/24/11
D	CHNG TO ZPS-2435 POWER SUPPLY & PHOTO	4/15/11
C	CORRECT LINE DRAWING	4/5/11
B	CORRECT DIM LINE ON LED HT.	3/29/11
A	WIRE DIMS TO REF. & ADDED TO FEATURES	11/10/10
	RELEASED AND CANCEL PL-0903-07	11/10/10
REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE

METRIC		DIMENSIONS ARE IN mm (INCHES)	
		TOLERANCE UNLESS OTHERWISE SPECIFIED	
		1 PL +/- REF.	
		2 PL +/- REF.	
		ANGLE +/-	
DRAWN BY	APPV'D BY	DATE	
L. WENGSTROM	L.R.	1/6/14	
- CAD DRAWING -			
MANUAL REVISIONS NOT PERMITTED			


JKL COMPONENTS CORPORATION					
TITLE HIGH DENSITY LED FLEX RIBBON, 24V					
SIZE	FSCM NO.	DRAWING NO.	ZFS-84000 MULTI		
A	55335				
SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET	
NONE	11/10/10	1/6/14	I	1 OF 2	

HIGH DENSITY LED FLEX RIBBON

Dimensions

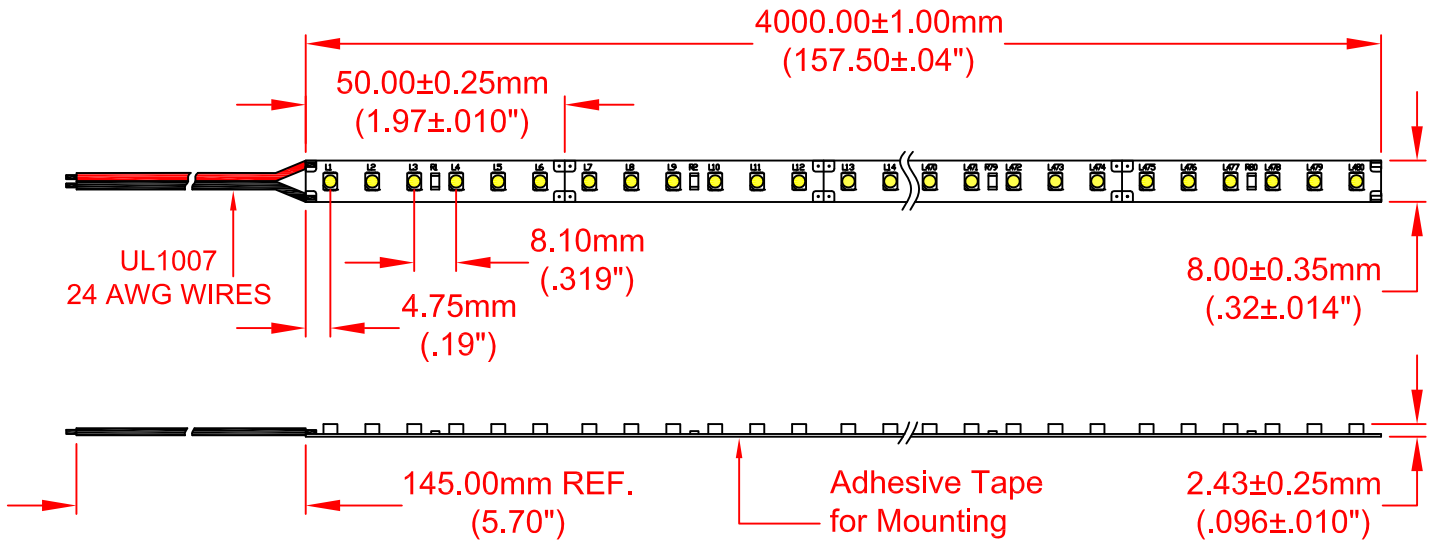

Circuit Diagram

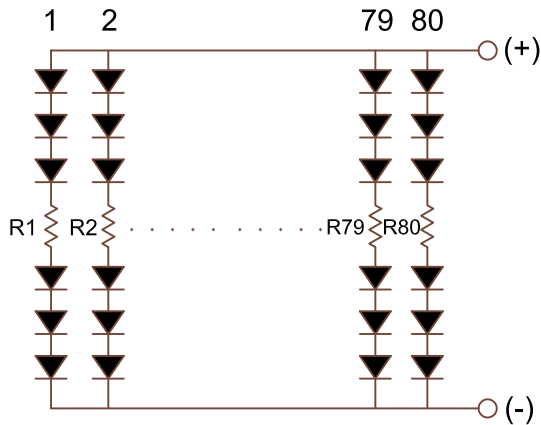

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Bars and Strips](#) category:

Click to view products by [JKL](#) manufacturer:

Other Similar products are found below :

[ZLF0310W62524](#) [LF1D-F2F-2W-300](#) [HH-SWW528F210W12-COB IP65](#) [HH-SG528F010W24-COB IP20](#) [LF2D-EN2F-2W-A](#) [10001622](#)
[LFBHL-SW860-24V-8S63-20](#) [LFBHL-SW940-24V-8S63-20](#) [HH-SRGB60F010W24-5050M](#) [N006120BB1LZ \(GREEN\)](#) [N006120BB1LZ](#)
[\(ICE BLUE\)](#) [N006120BB1LZ \(RED\)](#) [N006120BC1LZ \(BLUE\)](#) [N006120BC1LZ \(GREEN\)](#) [N006120BC1LZ \(RED\)](#) [RF-G27HI3510-](#)
[241202081-A0 IP20](#) [S010030CB3SB7](#) [S010030CB3SB7 \(BLACK PCB\)](#) [S010060CB1LZ \(NEUTRAL WHITE IP65\)](#) [S010060CB1LZ](#)
[\(WARM WHITE IP65\)](#) [S010060CB3SB7](#) [S010060CC1LZ \(WARM WHITE IP65\)](#) [S012060CB4ST \(BLACK PCB\)](#) [L202-3080033C30001](#)
[00219015](#) [10001611](#) [10001612](#) [10001613](#) [10001617](#) [10001619](#) [10001623](#) [10001655](#) [10001657](#) [10001661](#) [10001664](#) [10001670](#) [10001674](#)
[10001675](#) [10001681](#) [10001683](#) [10001690](#) [PUUA-100LLL-NK2P](#) [QAUR1161L030](#) [HC-F12V-3535 PCBA](#) [HC-F12V-F50-3L-WS2811](#) [HC-](#)
[F12V-WS2811-3535](#) [HC-F5V-144L-144LED-B-WS2813 IP65](#) [HC-F5V-144L-144LED-W/IP65](#) [HC-F5V-144L-144LED-W-WS2813 IP20](#)
[HC-F5V-30L-30LED-B-WS2813 IP20](#)