

HIGH DENSITY LED FLEX RIBBON


Features

VOLTAGE: 12V DC
 CURRENT: 4.4 Amps
 LED VIEWING ANGLE (2 θ 1/2): 120°

STANDARD PACKAGING:
 5 METER REEL (600 LED'S)

OPTIONAL PACKAGING:
 INDIVIDUAL 500mm Sections (60 LED's)
 Order as ZFS-85000HD-XX/SEC

NOTE: Individual sections ARE NOT supplied with insulated wire connection.

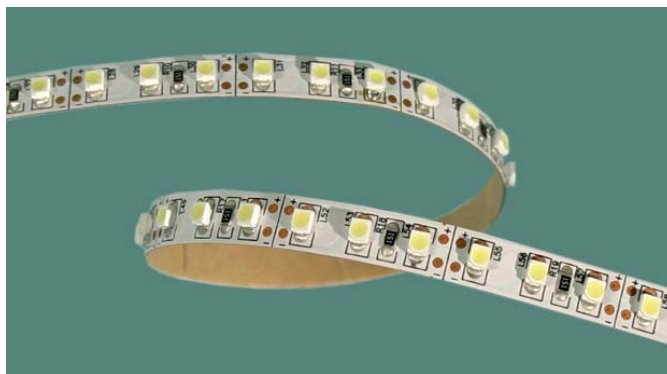

Accessories

ZPS-1235 12V, 35 Watt Power Supply
 ZPS-1260 12V, 60 Watt Power Supply
 ZDM-01 PWM LED Dimmer

Note: ZPS-1235 and ZPS-1260 require use of wire nuts for connections.

Parameter	Symbol	Rating	Units
Forward Current	IF	4.4	A
Power Dissipation	PD	52.8	W
Electrostatic Discharge	ESD	800	V
Operating Temperature	Topr	-25~+60	°C
Storage Temperature	Tstg	-40~+80	°C



E365522

Electro-Optical Characteristics (Ta = 25°C)

JKL Part Number	Color	Number of LED's	Input Voltage (V DC)	Power (W)	Current (A)	Radiance Angle	CCT (K)	Lumen Flux (lm)
ZFS-85000HD-WW	Warm White	600	12	52.8	4.4	120°	3500°K	1650
ZFS-85000HD-CW	Cool White	600	12	52.8	4.4	120°	6250°K	1800
ZFS-85000HD-NW	Neutral White	600	12	52.8	4.4	120°	4250°K	1800
ZFS-85000HD-R	Red	600	12	48.0	4.0	120°	626 nm	1820
ZFS-85000HD-B	Blue	600	12	48.0	4.0	120°	460 nm	1820

Note

Please refer to JKL Application Sheet JKL-AS-ZFS-LED FLEX for Installation and Power Recommendations.




ATTENTION

OBSERVE PRECAUTION FOR HANDLING ELECTROSTATIC DISCHARGE SENSITIVE DEVICES


F	DELETE MATING COMPONENTS	1/6/14	<p>METRIC</p> <p>THIRD ANGLE PROJECTION</p>	<p>DIMENSIONS ARE IN mm (INCHES)</p> <p>TOLERANCE UNLESS OTHERWISE SPECIFIED</p> <p>1 PL +/- REF. ANGLE +/-</p> <p>2 PL +/- REF. ANGLE +/-</p>	<p>JKL COMPONENTS CORPORATION</p> <p>TITLE: HIGH DENSITY LED FLEX RIBBON, 12V</p>					
E	ADD PART NO. ZFS-85000HD-NW	9/23/13								
D	ADD PART NO. ZFS-85000HD-WW	1/14/13								
C	CHANGE CURRENT TO READ (A)	12/19/12								
B	ADD COMPONENTS, NOTES & PAGE 2	8/23/11								
A	ADD WIRE SIZE & CHNG ACCESS. PART #'S	6/27/11	DRAWN BY	APP'VD BY	DATE	SIZE	FSCM NO.	DRAWING NO.	ZFS-85000HD MULTI	
	RELEASE & CANCEL PL-0901-08, PL-0905-05	5/23/11	L. WENGSTROM	L.R.	1/6/14	A	55335			
	AND PL-0905-06		- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED			SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET
REV. NO.	DESCRIPTION/ECO NUMBER	APP'VD DATE				NONE	5/23/11	1/6/14	F	1 OF 2

HIGH DENSITY LED FLEX RIBBON

Dimensions

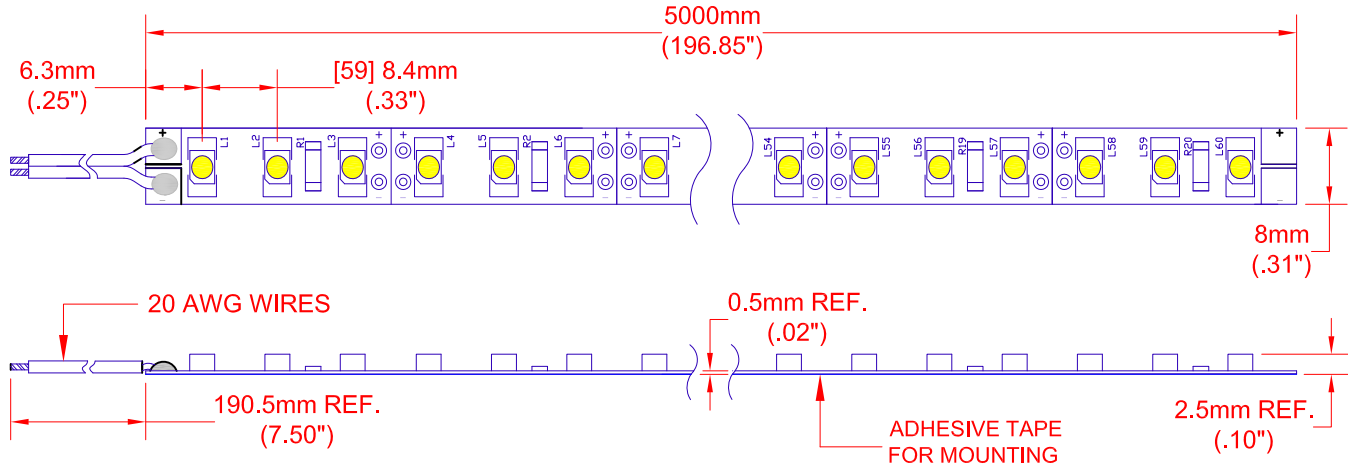

Circuit Diagram

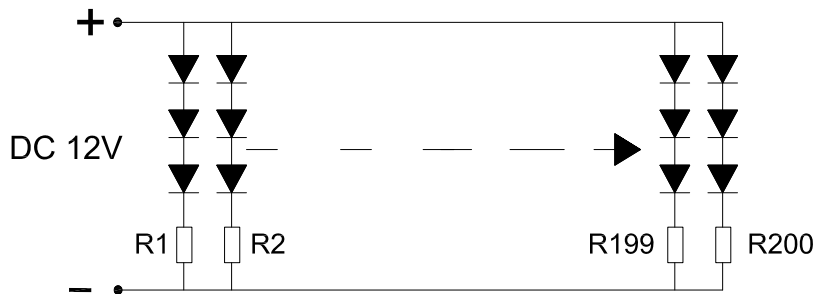

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Bars and Strips](#) category:

Click to view products by [JKL](#) manufacturer:

Other Similar products are found below :

[ZLF0310W62524](#) [LF1D-F2F-2W-300](#) [HH-SWW528F210W12-COB IP65](#) [HH-SG528F010W24-COB IP20](#) [LF2D-EN2F-2W-A](#) [10001622](#)
[LFBHL-SW860-24V-8S63-20](#) [LFBHL-SW940-24V-8S63-20](#) [HH-SRGB60F010W24-5050M](#) [N006120BB1LZ \(GREEN\)](#) [N006120BB1LZ](#)
[\(ICE BLUE\)](#) [N006120BB1LZ \(RED\)](#) [N006120BC1LZ \(BLUE\)](#) [N006120BC1LZ \(GREEN\)](#) [N006120BC1LZ \(RED\)](#) [RF-G27HI3510-](#)
[241202081-A0 IP20](#) [S010030CB3SB7](#) [S010030CB3SB7 \(BLACK PCB\)](#) [S010060CB1LZ \(NEUTRAL WHITE IP65\)](#) [S010060CB1LZ](#)
[\(WARM WHITE IP65\)](#) [S010060CB3SB7](#) [S010060CC1LZ \(WARM WHITE IP65\)](#) [S012060CB4ST \(BLACK PCB\)](#) [L202-3080033C30001](#)
[00219015](#) [10001611](#) [10001612](#) [10001613](#) [10001617](#) [10001619](#) [10001623](#) [10001655](#) [10001657](#) [10001661](#) [10001664](#) [10001670](#) [10001674](#)
[10001675](#) [10001681](#) [10001683](#) [10001690](#) [PUUA-100LLL-NK2P](#) [QAUR1161L030](#) [HC-F12V-3535 PCBA](#) [HC-F12V-F50-3L-WS2811](#) [HC-](#)
[F12V-WS2811-3535](#) [HC-F5V-144L-144LED-B-WS2813 IP65](#) [HC-F5V-144L-144LED-W/IP65](#) [HC-F5V-144L-144LED-W-WS2813 IP20](#)
[HC-F5V-30L-30LED-B-WS2813 IP20](#)