

WATER RESISTANT HD COOL WHITE LED FLEX RIBBON

Features

VOLTAGE: 12V DC
 CURRENT: 4.0 Amps
 LED VIEWING ANGLE (2 θ 1/2): 120°
 IP66 WATER RESISTANT

STANDARD PACKAGING:
 5 METER REEL (600 LED'S)



Maximum Ratings


Parameter	Symbol	Rating	Units
Forward Current	IF	4	A
Power Dissipation	PD	48	W
Electrostatic Discharge	ESD	800	V
Operating Temperature	Topr	-20~+40	°C
Storage Temperature	Tstg	-30~+60	°C

Accessories

ZPS-1260 12V, 60 Watt Power Supply
 ZDM-01 PWM LED Dimmer

Note: ZPS-1235 and ZPS-1260 require use of wire nuts for connections.

Dimensions

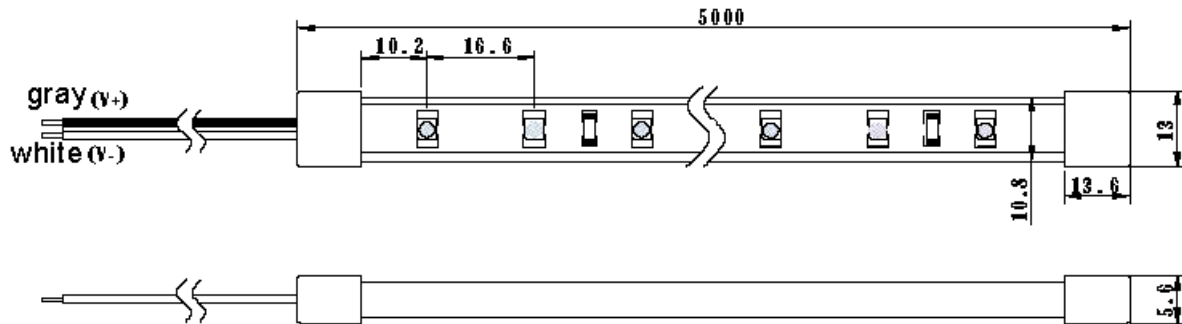

Electro-Optical Characteristics (Ta = 25°C)

JKL Part Number	Color	Number of LED'S	Input Voltage (V DC)	Power (W)	Current (A)	Radiance Angle	CCT (K)	Lumen Flux (lm)
ZFS-85020WR-CW	COOL WHITE	600	12	48.0	4.0	120°	6000	1900

Note

Please refer to JKL Application Sheet JKL-AS-ZFS-LED FLEX for Installation and Power Recommendations.



ATTENTION

OBSERVE PRECAUTION FOR HANDLING ELECTROSTATIC DISCHARGE SENSITIVE DEVICES

			METRIC	DIMENSIONS ARE IN mm (INCHES)		JKL COMPONENTS CORPORATION					
			 THIRD ANGLE PROJECTION	TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE					
				1 PL +/- REF.		12V HIGH DENSITY WATER RESISTANT COOL WHITE LED FLEX RIBBON,					
			2 PL +/- REF.		ZFS-85020WR-CW						
			ANGLE +/-		SIZE	FSCM NO.	DRAWING NO.				
A	CHANGE DIM. 5020 TO 5000	8/10/13	DRAWN BY	APP'VD BY	DATE	A	55335				
	RELEASED	8/5/13	L. WENGSTROM	L.R.	8/10/13						
REV. NO.	DESCRIPTION/ECO NUMBER	APP'VD DATE	- CAD DRAWING -			SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET	
			MANUAL REVISIONS NOT PERMITTED			NONE	8/5/13	8/10/13	A	1 OF 1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Bars and Strips](#) category:

Click to view products by [JKL](#) manufacturer:

Other Similar products are found below :

[ZLF0310W62524](#) [LF1D-F2F-2W-300](#) [HH-SWW528F210W12-COB IP65](#) [HH-SG528F010W24-COB IP20](#) [LF2D-EN2F-2W-A](#) [10001622](#)
[LFBHL-SW827-24V-8S63-20](#) [LFBHL-SW860-24V-8S63-20](#) [LFBHL-SW940-24V-8S63-20](#) [HH-SRGB60F010W24-5050M](#) [N006120BB1LZ](#)
[\(GREEN\)](#) [N006120BB1LZ \(ICE BLUE\)](#) [N006120BB1LZ \(RED\)](#) [N006120BC1LZ \(BLUE\)](#) [N006120BC1LZ \(GREEN\)](#) [N006120BC1LZ](#)
[\(RED\)](#) [RF-G27HI3510-241202081-A0 IP20](#) [S010030CB3SB7](#) [S010030CB3SB7 \(BLACK PCB\)](#) [S010060CB1LZ \(NEUTRAL WHITE IP65\)](#)
[S010060CB1LZ \(WARM WHITE IP65\)](#) [S010060CB3SB7](#) [S010060CC1LZ \(WARM WHITE IP65\)](#) [S012060CB4ST \(BLACK PCB\)](#) [L202-](#)
[3080033C30001](#) [00219015](#) [10001611](#) [10001612](#) [10001617](#) [10001619](#) [10001623](#) [10001655](#) [10001657](#) [10001661](#) [10001664](#) [10001670](#)
[10001674](#) [10001675](#) [10001681](#) [10001683](#) [10001690](#) [PUUA-100LLL-NK2P](#) [QAUR1161L030](#) [HC-F12V-3535 PCBA](#) [HC-F12V-F50-3L-](#)
[WS2811](#) [HC-F12V-WS2811-3535](#) [HC-F5V-144L-144LED-B-WS2813 IP65](#) [HC-F5V-144L-144LED-W/IP65](#) [HC-F5V-144L-144LED-W-](#)
[WS2813 IP20](#) [HC-F5V-30L-30LED-B-WS2813 IP20](#)