
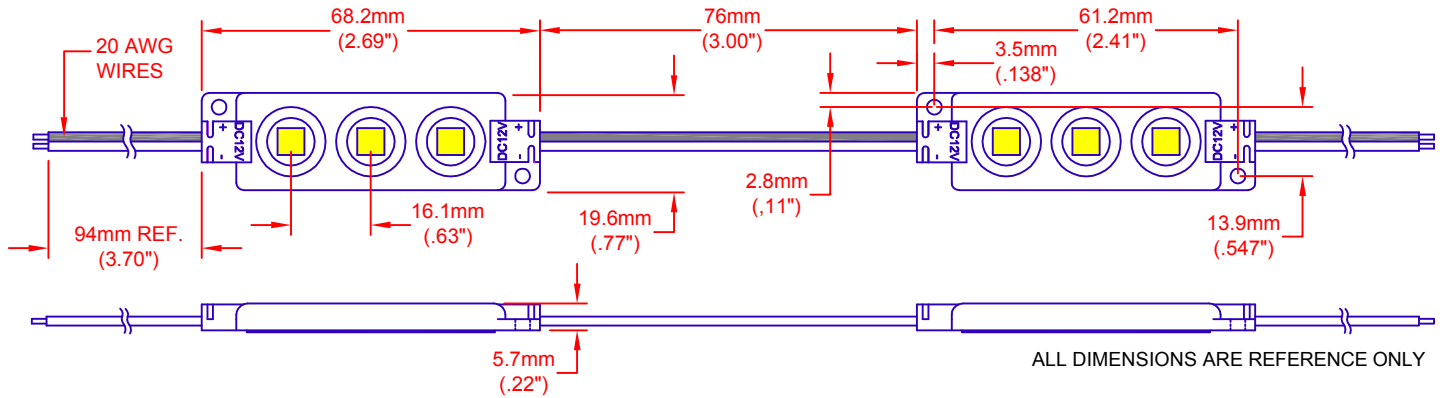


FEATURES

VOLTAGE: 12V DC PER MODULE
 CURRENT: 45mA PER MODULE
 LED VIEWING ANGLE (2 0 1/2): 120°
 MODULE THICKNESS: 5.7mm
 PACKAGE: 20 PIECES PER REEL
 WATER RESISTANCE IP65

19.6mm X 68.2mm WATER RESISTANT LED MODULES

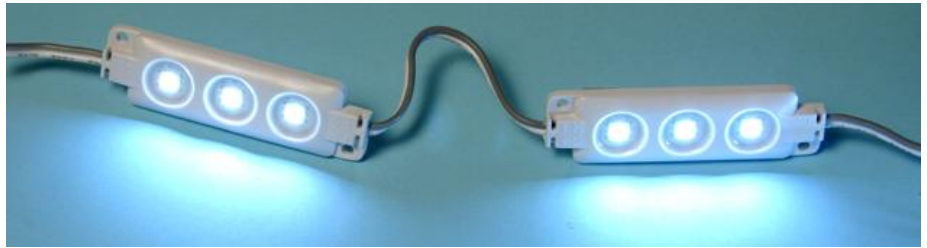

ALL DIMENSIONS ARE REFERENCE ONLY

JKL PART NO.: ZM-1968-WW (WARM WHITE)


Electrical/Optical Characteristics at TA = 25°C

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Forward Voltage DC	VF	IF = 45mA	--	12	--	V
Color Temperature	TC	IF = 45mA	3000			K
Luminous Flux per Module	φV/Mod	IF = 45mA	--	35	--	lm/mod
Luminous Flux per Ft.	φV/Ft	--	--	75	--	lm/ft
Recommend Forward Current	IF(rec)	--	--	45	--	mA

JKL PART NO.: ZM-1968-CW (COOL WHITE)

Electrical/Optical Characteristics at TA = 25°C

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Forward Voltage DC	VF	IF = 45mA	--	12	--	V
Color Temperature	TC	IF = 45mA	6000			K
Luminous Flux per Module	φV/Mod	IF = 45mA	--	43	--	lm/mod
Luminous Flux per Ft.	φV/Ft	--	--	90	--	lm/ft
Recommend Forward Current	IF(rec)	--	--	45	--	mA

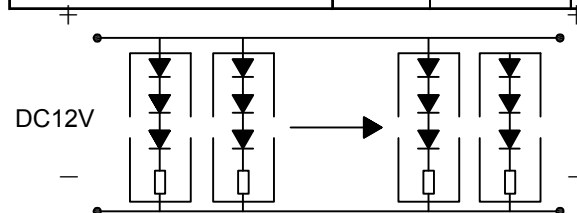

Absolute Maximum Rating at TA = 25°C

Parameter	Symbol	Absolute MAX. Rating	Unit
Forward Current	IF	45	mA
Power Dissipation	PD	0.54	W
Electrostatic Discharge	ESD	800	V
Operating Temperature	Topr	-20~+40	°C
Storage Temperature	Tstg	-25~+60	°C

NOTES:


- STANDARD MOUNTING INCLUDES ADHESIVE BACKING AND MOUNTING TABS FOR A #6 SCREW (SCREWS NOT INCLUDED).
- JKL ACCESSORIES TO BE ORDERED SEPARATELY: ZPS-1235 OR ZPS-1260 POWER SUPPLIES.
- DUE TO WIRE GAUGE USED IN THE CONSTRUCTION OF THE MODULES SERIAL RUNS SHOULD BE LIMITED TO 38 FEET OR 80 MODULES.
- POWER CONSUMPTION 1 WATTS PER FOOT.

PLEASE REFER TO JKL APPLICATION SHEET: JKL-AS-ZM-CHANNEL-LED FOR INSTALLATION AND POWER RECOMMENDATIONS.

ATTENTION



OBSERVE PRECAUTION FOR HANDLING ELECTROSTATIC DISCHARGE SENSITIVE DEVICES



DIMENSIONS ARE IN mm & (INCHES)
 TOLERANCE UNLESS OTHERWISE SPECIFIED
 1 PL +/- REF.
 2 PL +/- ANGLE +/-

JKL COMPONENTS CORPORATION

WHITE 3-LED CHANNEL LIGHT

REV. NO.	DESCRIPTION/ECO NUMBER	APP'VD DATE	SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET
B	ADD IP65 TO WATER RESISTANCE	4/18/16	NONE	2/14/12	4/18/16	B	1 OF 1
A	ADDED DIMENSIONS FOR MOUNTING HOLES	11/22/12					
	RELEASED	2/14/12					
DRAWN BY L. WENGSTROM			APP'VD BY L.R.	DATE 4/18/16	FSCM NO. 55335		DRAWING NO. ZM-1968 MULTI
- CAD DRAWING -			MANUAL REVISIONS NOT PERMITTED				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Lighting Fixtures](#) category:

Click to view products by [JKL](#) manufacturer:

Other Similar products are found below :

[1301080067](#) [XVEC21P](#) [XVEC2B7](#) [2576960000](#) [113163000-00662717](#) [113472000-00691461](#) [XVBC2B3](#) [XVBC2B7](#) [XVBC4B4](#) [XVBC4B5](#)
[XVBC4B6](#) [XVBC4M3](#) [XVBC4M4](#) [XVBC4M5](#) [XVBC4M8](#) [XVBZ01](#) [XVBZ03A](#) [XVBZ04](#) [E35600](#) [NB-RLAMP01-LED](#) [FLK7LED](#)
[XVBZ04A](#) [XVBC4M7](#) [XVBC4M6](#) [XVBC4B3](#) [XVBC2B8](#) [2700127](#) [2702933](#) [2702477](#) [2403122](#) [2403121](#) [2402991](#) [89406068](#) [148-00076](#)
[113261000-00641180](#) [190007019-00014904](#) [226108019-00610754](#) [4823](#) [4824](#) [4868](#) [11212573001-00514271](#) [112887037-00076065](#)
[113021000-00564565](#) [113473000-00704968](#) [NB-RLAMP01](#) [112577000-00539774](#) [113458000-00668976](#) [E35500](#) [408001403-00671626](#)
[SL7/4-FW](#)