

High Frequency Ceramic Solutions

2.4 GHz SMD, Above Metal, Low Profile Mini Chip Antenna

P/N 2450AT42E0100


This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.

Detail Specification: 10/28/2021

Page 1 of 8

General Specifications

Part Number	2450AT42E0100
Frequency (MHz)	2400 - 2480
Peak Gain (dBi typ.)	-2.0 (YZ-V)
Average Gain (dBi typ.)	-5.0 (YZ-V)
Return Loss (dB)	5.6 typ. (4.5 min.)
Impedance (Ω)	50
Power Capacity (W)	2 max. (CW)
Reel Quantity (pcs./reel)	2,000
Operating Temp	-40 to +85°C
Recommended Storage Conditions and Period for unused Product on T&R	+5°C to +35°C Humidity 45 - 75% RH 18 months max.



Zero Clearance!

Antenna mounts directly above or below the metal layer of PCB. No antenna clearance required ever again!

Total average radiated efficiency on PCB feature on "Mounting Considerations 1" (orderable EVB p/n: 2450AT42E0100-EB1SMA) is ~30%

This antenna was designed in mind for small coin cell, wearable, IoT, 2.4 BLE, 802.11, ISM, Zigbee, etc. applications in close-range networks where metal or a battery/display covers the entire length or side of the PCB or encasement must be present directly under the antenna and there's no room for usual/typical antenna metal clearance.




This antenna is specifically designed for PCBs that have 0.5-1mm of total thickness

Part Number Explanation

P/N Suffix	Packing Style	Bulk (loose pcs.)	Suffix = S	E.g. 2450AT42E0100S
		T & R	Suffix = E	E.g. 2450AT42E0100E
	Evaluation Board	2450AT42E0100-EB1SMA (comes with 1 female SMA connector)		

Mechanical Specifications

	In	mm
L	0.197 ± 0.008	5.00 ± 0.20
W	0.079 ± 0.008	2.00 ± 0.20
T	0.059 ± 0.008	1.50 ± 0.20
a	0.020 ± 0.008	0.50 ± 0.20
b	0.059 ± 0.008	1.50 ± 0.20
C	0.012 max	0.30 max



Terminal Configuration

1	Feeding Point
2	NC ¹
3	GND
4	GND



¹Make sure to have Pin 2 soldered to its PCB land pad but **not** connected to GND or input, it must be NC (or floating).

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 4.0

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4 GHz SMD, Above Metal, Low Profile Mini Chip Antenna



P/N 2450AT42E0100

This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.

Detail Specification: 10/28/2021

Page 2 of 8

Mounting Considerations 1

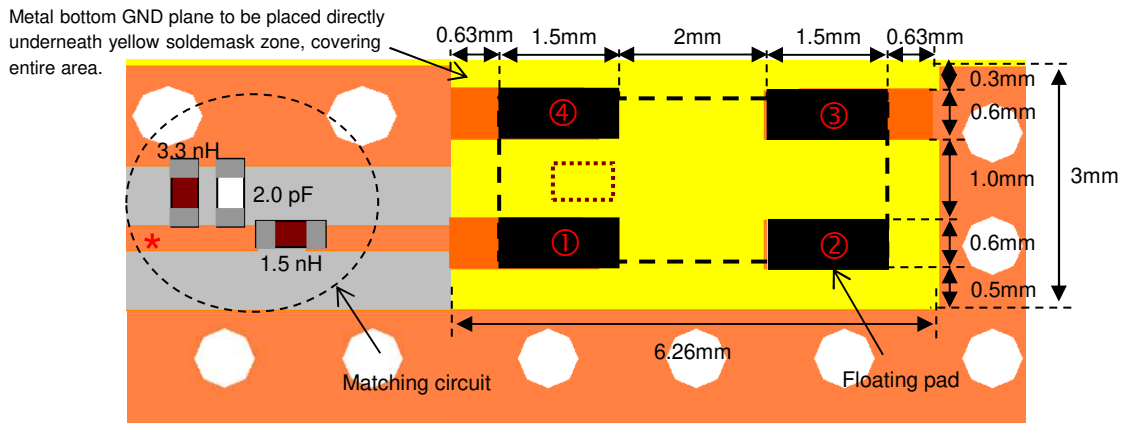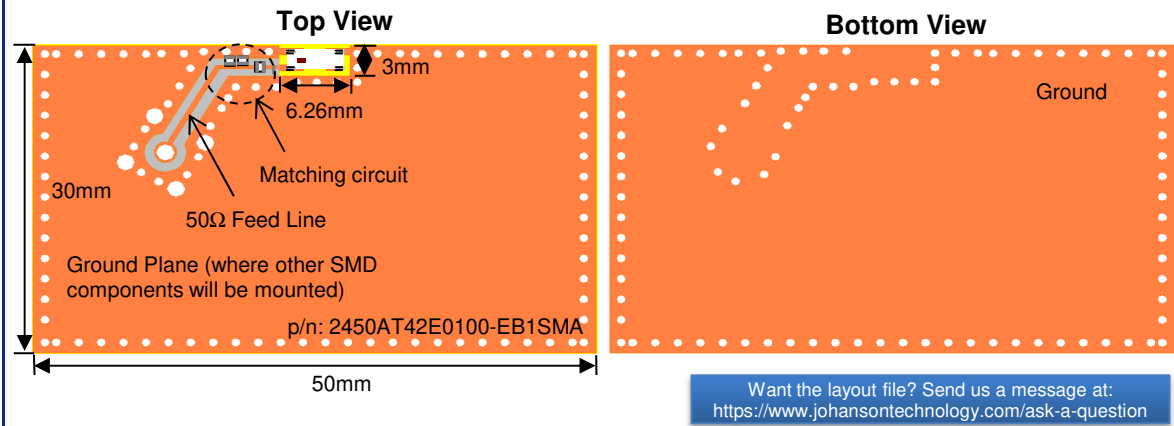

* Line width should be designed to match 50ohm characteristic impedance, depending on PCB material and thickness. A coplanar waveguide trace is recommended for best results.

For this particular antenna It is recommended that the designer leave available slots for the matching network, even if all slots won't be used, this will prepare the PCB for the unpredictable final mass production version of the matching circuit. The antenna matching network values above are used when antenna is mounted on Johanson's evaluation board. The matching values on client's PCB will be different.

To order a pre-tuned 50Ω EVB with a female SMA connector you see here Click here:

<https://www.johansontechnology.com/request-a-sample>

Reference p/n: 2450AT42E0100-EB1SMA

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 4.0

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4 GHz SMD, Above Metal, Low Profile Mini Chip Antenna


P/N 2450AT42E0100

This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.

Detail Specification: 10/28/2021

Page 3 of 8

Typical Electrical Characteristics (T=25 °C)

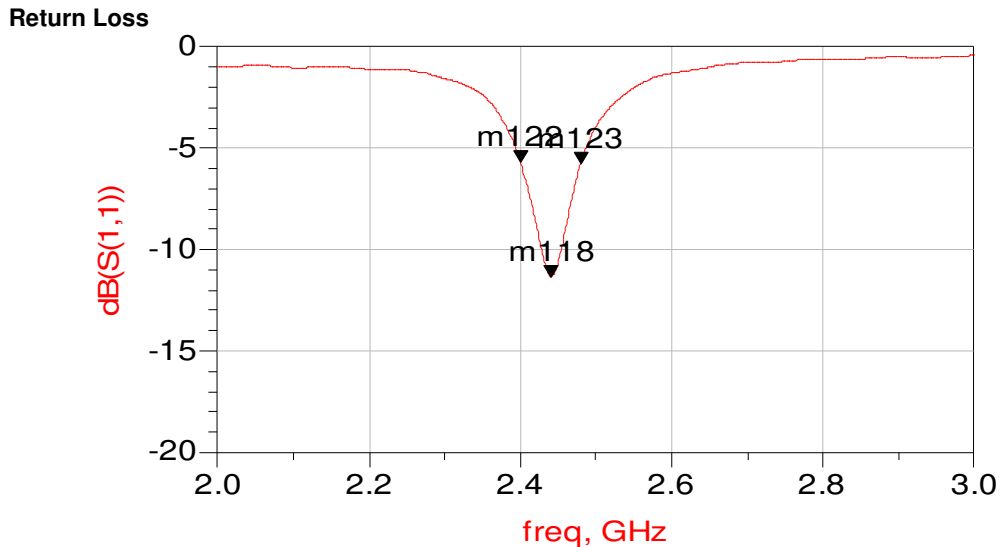

m122 freq=2.400GHz dB(S(1,1))=-5.691

m118 freq=2.440GHz dB(S(1,1))=-11.343

m123 freq=2.480GHz dB(S(1,1))=-5.746

The designer should not be highly concerned of the fact that the antenna only demonstrates a -5dB S11 level at the band edges. The antenna has sufficient gain at the band edges to satisfy the applications and uses a high dielectric constant ceramic giving it some detuning resilience to capacitive loading effects. This antenna is designed for close proximity applications such as the ones mentioned on page 1.

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 4.0

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4 GHz SMD, Above Metal, Low Profile Mini Chip Antenna


P/N 2450AT42E0100

This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.

Detail Specification: 10/28/2021

Page 4 of 8

Typical Radiation Patterns @ 2.44GHz (T=25 °C)

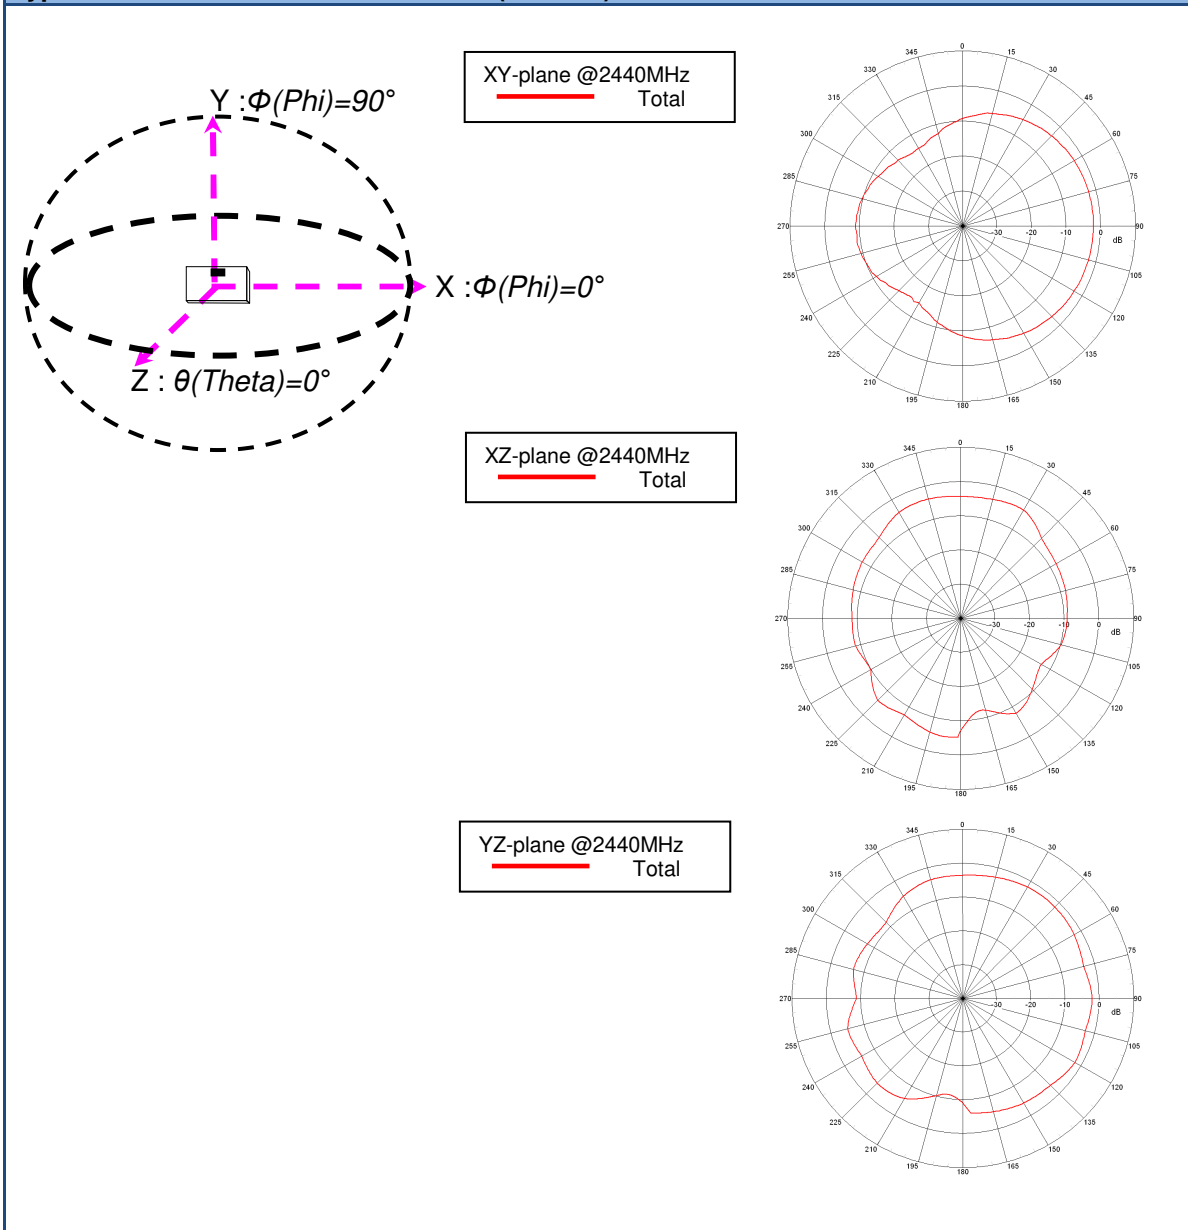

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 4.0

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4 GHz SMD, Above Metal, Low Profile Mini Chip Antenna

P/N 2450AT42E0100


This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.

Detail Specification: 10/28/2021


Page 5 of 8

Mounting Considerations 2 - Circular PCB Environments (coin cell type)

Top View

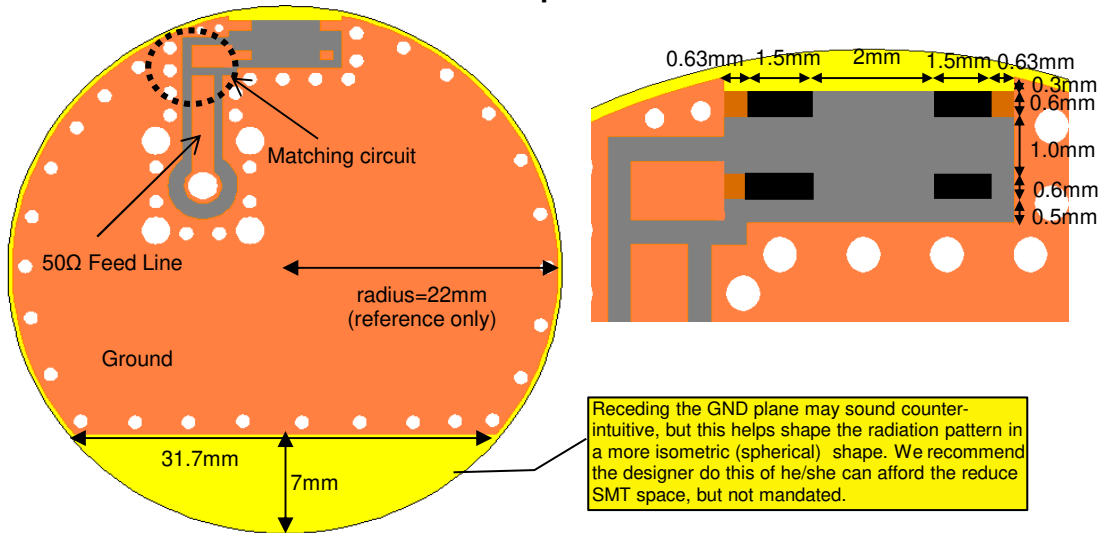

Bottom View

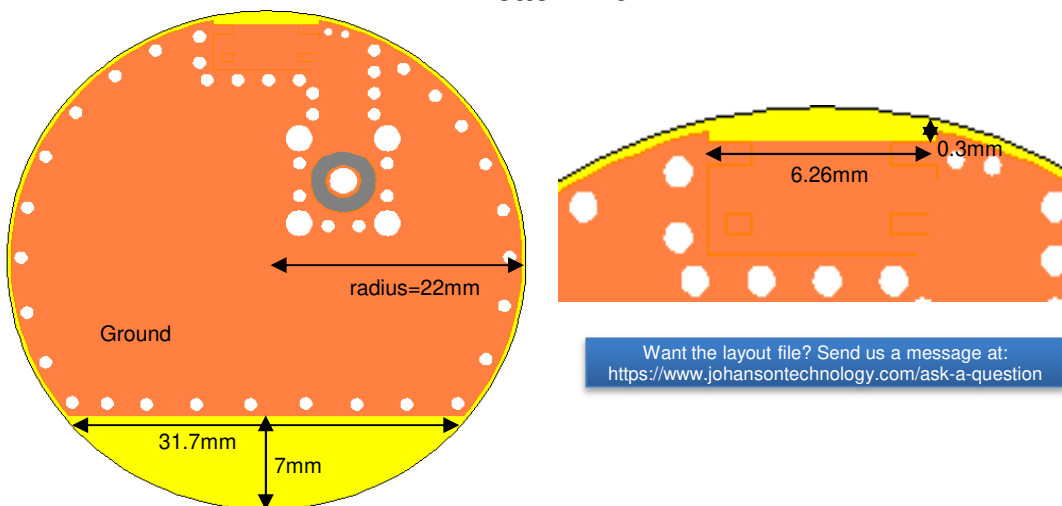

Note: There's no orderable EVB available for the above "Mounting Considerations 2" reference design

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 4.0

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4 GHz SMD, Above Metal, Low Profile Mini Chip Antenna

P/N 2450AT42E0100


This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.

Detail Specification: 10/28/2021

Page 6 of 8


Mounting Considerations 3 - Recommendations when using 2450AT42E010B

We have found that the best performance can be gained when using the 2450AT42E010B with a 4-layer PCB with a total thickness approximately 1.5mm thick.

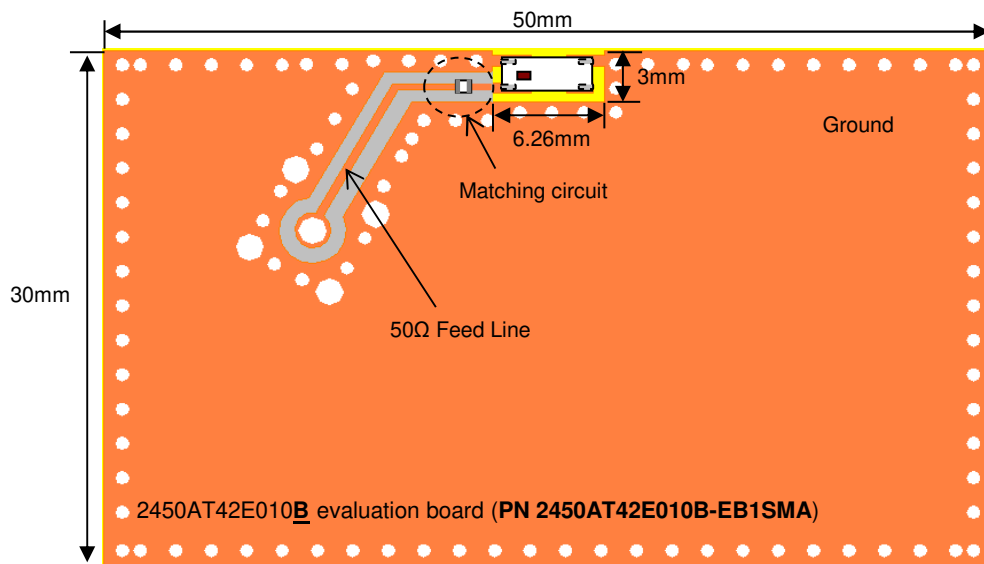

Want the layout file? Send us a message at:
<https://www.johansontechnology.com/ask-a-question>

The 2450AT42E010B 4-layer evaluation board has the following stackup:

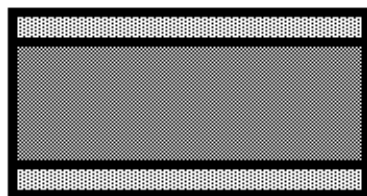

← 6 mil

← 41 mil

← 6 mil

To order a pre-tuned 50Ω EVB with a female SMA connector, click here:

<https://www.johansontechnology.com/request-a-sample>

Reference p/n: **2450AT42E010B-EB1SMA**

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 4.0

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4 GHz SMD, Above Metal, Low Profile Mini Chip Antenna

P/N 2450AT42E0100

This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.


Detail Specification: 10/28/2021

Page 7 of 8

How To Choose The Correct Antenna Variant

Since the antenna's efficiency is largely affected by the thickness of the PCB's substrate, we offer another variant of this antenna. This allows a more robust design to fit your PCB. The disparity between antenna variations are internal only; variations are identical in dimension and footprint-compatible.

Refer to the diagram below to understand what is meant by substrate thickness.

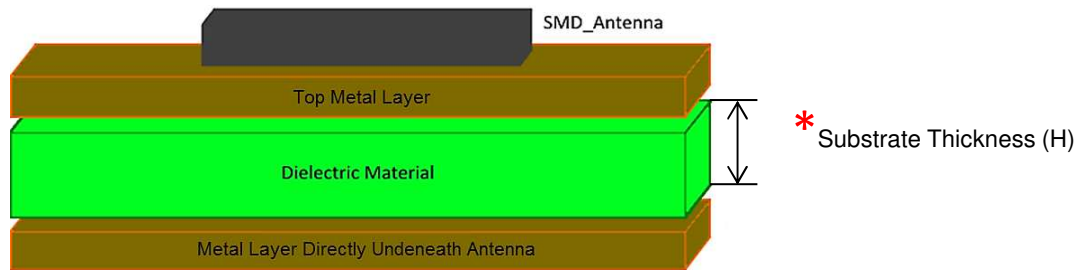

* For PCBs consisting of multiple layers, the thickness (H) is limited distance between the metal layer immediately below the antenna.

PCB Substrate Thickness	Recommended JTI PN
≤ 1.0mm	2450AT42E0100
1.0mm - 2.0mm	2450AT42E010B

Typical Efficiency Values @ 2.44GHz for various scenarios for a 30x50mm PCB

The following efficiency values represent performance on a 30x50mm EVB like on page 2. Please note that antenna efficiency varies widely with board layout, size and surroundings.

PCB Substrate Thickness (H)	Antenna Efficiency @ 2.44GHz	
	2450AT42E0100	2450AT42E010B
H = 0.12 mm	1.95%	1.02%
H = 0.7 mm	29.20%	9.30%
H = 1.5 mm	23.30%	38.00%
H = 2.5 mm	21.60%	42.00%

Note: "H" substrate thickness of <0.25mm(10mil) is not recommended. The component will still radiate however not optimally.

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 4.0

2021 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.4 GHz SMD, Above Metal, Low Profile Mini Chip Antenna

P/N 2450AT42E0100

This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.

Detail Specification: 10/28/2021

Page 8 of 8

Antenna layout review, tuning, and characterization services

<https://www.johansontechnology.com/ipc-antenna-services>

More SMD Chip Antennas at:

<https://www.johansontechnology.com/antennas>

Soldering Information

<https://www.johansontechnology.com/ipcsoldering-profile>

Antenna layout and tuning techniques (How to obtain the new antenna matching values)

<https://www.johansontechnology.com/tuning>

Packaging information

<https://www.johansontechnology.com/tape-reel-packaging>

RoHS Compliance


<https://www.johansontechnology.com/rohs-compliance>

MSL Info

<https://www.johansontechnology.com/msl-rating>

P/N Explanation and Breakdown

<https://www.johansontechnology.com/ipc-pn-explained>



Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver. 4.0

2021 Johanson Technology, Inc. All Rights Reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Johanson](#) manufacturer:

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [A75-001](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [Y4503](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [C37](#) [MAF94051](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#) [WCM.01.0111](#) [MIKROE-2393](#) [MIKROE-2352](#)