


TANCERAM® CHIP CAPACITORS

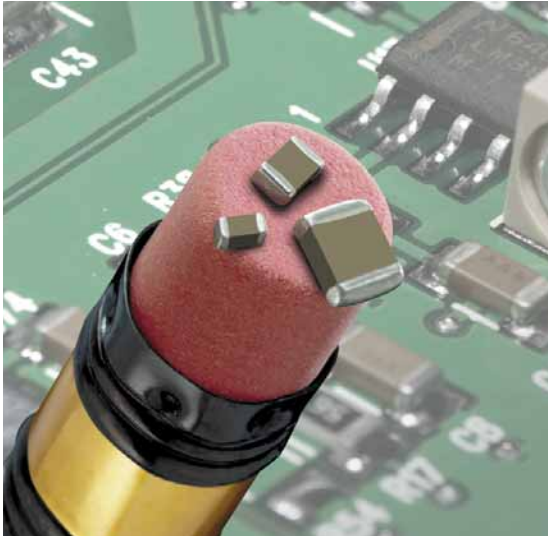

TANCERAM® chip capacitors can replace tantalum capacitors in many applications and offer several key advantages over traditional tantalums. Because Tanceram® capacitors exhibit extremely low ESR, equivalent circuit performance can often be achieved using considerably lower capacitance values. Low DC leakage reduces current drain, extending the battery life of portable products. Tancerams® high DC breakdown voltage ratings offer improved reliability and eliminate large voltage de-rating common when designing with tantalums.


ADVANTAGES

- Low ESR
- Higher Surge Voltage
- Reduced CHIP Size
- Higher Insulation Resistance
- Low DC Leakage
- Non-polarized Devices
- Improved Reliability
- Higher Ripple Current


APPLICATIONS

- Switching Power Supply Smoothing (Input/Output)
- DC/DC Converter Smoothing (Input/Output)
- Backlighting Inverters
- General Digital Circuits

Typical ESR Comparison

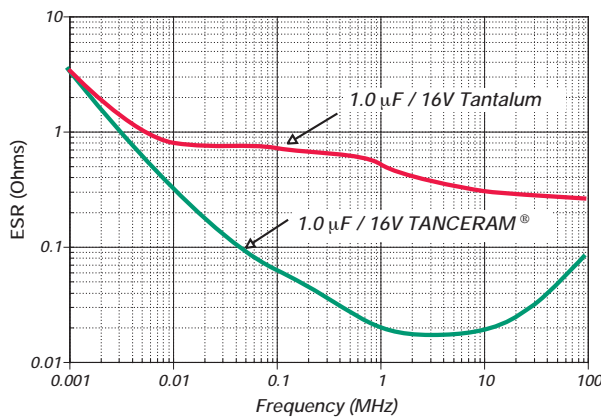

Typical Breakdown Voltage Comparison

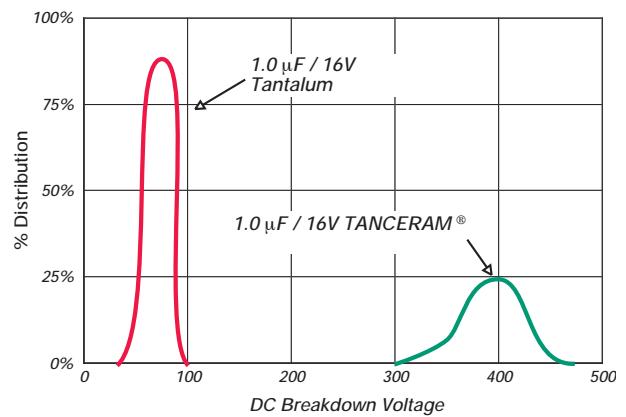

HOW TO ORDER TANCERAM®

250	R18	Y	105	Z	V	4	E									
VOLTAGE 500 = 50 V 250 = 25 V 160 = 16 V 100 = 10 V 6R3 = 6.3 V	CASE SIZE See Chart	DIELECTRIC W = X7R X = X5R Y = Y5V	CAPACITANCE 1st two digits are significant; third digit denotes number of zeros. 474 = 0.47 µF 105 = 1.00 µF	TOLERANCE Y5V Z = +80% -20% X7R/X5R K = ±10% M = ±20%	TERMINATION V = Ni barrier w/ 100% Sn Plating	MARKING 4 = Unmarked	TAPE MODIFIER <table border="1" style="font-size: small; width: 100%;"> <thead> <tr> <th>Code</th> <th>Type</th> <th>Reel</th> </tr> </thead> <tbody> <tr> <td>E</td> <td>Plastic</td> <td>7"</td> </tr> <tr> <td>T</td> <td>Paper</td> <td>7"</td> </tr> </tbody> </table> Tape specifications conform to EIA RS481	Code	Type	Reel	E	Plastic	7"	T	Paper	7"
Code	Type	Reel														
E	Plastic	7"														
T	Paper	7"														

P/N written: 250R18Y105ZV4E



TANCERAM® CHIP CAPACITORS

CAPACITANCE SELECTION

CASE SIZE			VDC	1.0 μ F	2.2 μ F	4.7 μ F	10 μ F	22 μ F	47 μ F	100 μ F
0402 R07	L W T E/B	Inches (mm) .040 \pm .004 (1.02 \pm .10) .020 \pm .004 (0.51 \pm .10) .025 Max. (0.64) .008 \pm .004 (0.20 \pm .10)								
			10	*						
			6.3	*	*	*				
0603 R14	L W T E/B	Inches (mm) .063 \pm .008 (1.60 \pm .20) .032 \pm .008 (0.81 \pm .20) .035 Max. (0.89) .010 \pm .005 (.25 \pm .13)	25		*					
			16	*	*	*				
			10	*	*	*				
			6.3	*	*	*		*		
0805 R15	L W T E/B	Inches (mm) .080 \pm .010 (2.03 \pm .25) .050 \pm .010 (1.27 \pm .25) .060 Max. (1.52) .020 \pm .010 (0.51 \pm .25)	25	*	*	*	*			
			16	*	*	*	*	*		
			10	*	*	*	*	*	*	
			6.3	*	*	*	*	*	*	*
1206 R18	L W T E/B	Inches (mm) .125 \pm .010 (3.17 \pm .25) .062 \pm .010 (1.57 \pm .25) .070 Max. (1.78) .020 +.015-.010 (0.51+.38-.25)	25	*	*	*	*	*		
			16	*	*	*	*	*	*	
			10	*	*	*	*	*	*	*
			6.3	*	*	*	*	*	*	*
1210 S41	L W T E/B	Inches (mm) .125 \pm .010 (3.18 \pm .25) .095 \pm .010 (2.41 \pm .25) .110 Max. (2.8) .020 +.015-.010 (0.51+.38-.25)	50	*	*	*	*	*		
			25	*	*	*	*	*	*	
			16	*	*	*	*	*	*	*
			6.3	*	*	*	*	*	*	*

DIELECTRIC CODE

W	X	Y	W	X	Y	W	X	Y	W	X	Y	W	X	Y	W	X	Y
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

* = NEW PART • = HIGH VOLUME

ELECTRICAL

CHARACTERISTICS

	X7R	X5R	Y5V
Temperature Coefficient:	\pm 15% (-55 to +125°C)	\pm 15% (-55 to +85°C)	+22%, -82% (-30 to +85°C)
Dissipation Factor:	For \geq 50 VDC: 5% max. For \leq 25 VDC: 10% max.	For \geq 50 VDC: 5% max. For \leq 25 VDC: 10% max.	For \geq 10 VDC: 16% max. For 6.3 VDC: 20% max.
Insulation Resistance (Min. @ 25°C, WVDC)	100 Ω F or 10 G Ω , whichever is less		
Dielectric Strength:	2.5 X WVDC, 25°C, 50mA max.		
Test Conditions:	Capacitance values \leq 22 μ F: 1.0kHz \pm 50Hz @ 1.0 \pm 0.2 Vrms Capacitance values $>$ 22 μ F: 120Hz \pm 10Hz @ 0.5V \pm 0.1 Vrms		
Other:	See page 20 for additional dielectric specifications.		



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multilayer Ceramic Capacitors MLCC - SMD/SMT category:](#)

Click to view products by [Johanson manufacturer:](#)

Other Similar products are found below :

[M39014/02-1218V](#) [M39014/02-1225V](#) [M39014/02-1262V](#) [M39014/22-0631](#) [1210J5000102JCT](#) [1210J2K00102KXT](#) [1210J5000103KXT](#)
[1210J5000223KXT](#) [D55342E07B379BR-TR](#) [D55342E07B523DR-T/R](#) [1812J1K00103KXT](#) [1812J1K00473KXT](#) [1812J2K00680JCT](#)
[1812J4K00102MXT](#) [1812J5000102JCT](#) [1812J5000103JCT](#) [1812J5000682JCT](#) [NIN-FB391JTRF](#) [NIN-FC2R7JTRF](#) [NPIS27H102MTRF](#)
[C1206C101J1GAC](#) [C1608C0G1E472JT000N](#) [C2012C0G2A472J](#) [CA050M0047REH-0607](#) [2220J2K00101JCT](#) [KHC201E225M76N0T00](#)
[1812J1K00222JCT](#) [1812J2K00102KXT](#) [1812J2K00222KXT](#) [1812J2K00472KXT](#) [2-1622820-7-CUT-TAPE](#) [2220J3K00102KXT](#)
[2225J2500824KXT](#) [CCR07CG103KM](#) [CGA2B2C0G1H010C](#) [CGA2B2C0G1H040C](#) [CGA2B2C0G1H050C](#) [CGA2B2C0G1H060D](#)
[CGA2B2C0G1H070D](#) [CGA2B2C0G1H151J](#) [CGA2B2C0G1H1R5C](#) [CGA2B2C0G1H2R2C](#) [CGA2B2C0G1H3R3C](#) [CGA2B2C0G1H680J](#)
[CGA2B2C0G1H6R8D](#) [CGA2B2X8R1H221K](#) [CGA2B2X8R1H472K](#) [CGA3E1X7R1C474K](#) [CGA3E2C0G1H561JT0Y0N](#)
[CGA4J2X7R2A104K](#)