


"High Frequency Ceramic Solutions"

5.1 to 5.9 GHz, micro antenna optimized for PCB edge mount. Great for WiFi P/N 5500AT07A0900 and V2V (Vehicle to Vehicle communications)

Detail Specification: 10/30/2014

Page 1 of 4

General Specifications

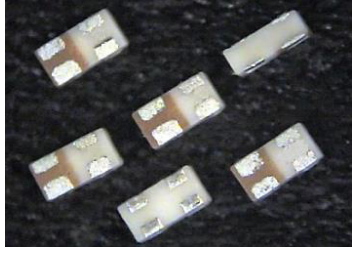Part Number	5500AT07A0900*		
Frequency (MHz)	5150 ~ 5850	5350 ~ 5900	
Peak Gain (dBi typ.)	0.0 (YZ-Total)	1.0 (YZ-Total)	
Average Gain (dBi typ.)	-3.0 (YZ-Total)	-1.5 (YZ-Total)	
Return Loss	6.0 dB max.	3.0 dB max.	
Power Capacity	2W max. (CW)		
Operating Temperature	-40 ~ +85 °C		Unused product (on T&R) recommended storage conditions
Storage Temperature	-40 ~ +85 °C		
Q'ty/Reel (pcs)	10,000 pcs		Storage Period
			18 months max.


*AEC-Q200 qualifiable component.

Part Number Explanation

P/N Suffix	Packaging Style	Bulk (loose)	Suffix = S	Eg. 5500AT07A0900S
		T & R (10000pcs)	Suffix = T	Eg. 5500AT07A0900T
	Termination	100% Tin	Suffix = None	Eg. 5500AT07A0900(T or S)
	Evaluation Board	5500AT07A0900-EB1SMA (pre-tuned 50ohms with female SMA connector)		


Mechanical Dimensions

	In	mm
L	0.039 ± 0.004	1.00 ± 0.10
W	0.020 ± 0.004	0.50 ± 0.10
T	0.014 Max.	0.37 Max.
a	0.006 +.004/-.006	0.15 +0.1/-0.05
b	0.010 +.004/-.006	0.25 +0.1/-0.05
c	0.003 +.004/-.006	0.08 +0.1/-0.05

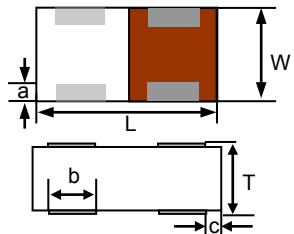


Terminal Configuration

No.	Function	No.	Function
1	Feed	3	GND
2	GND	4	Feed



Recommended PCB Pattern

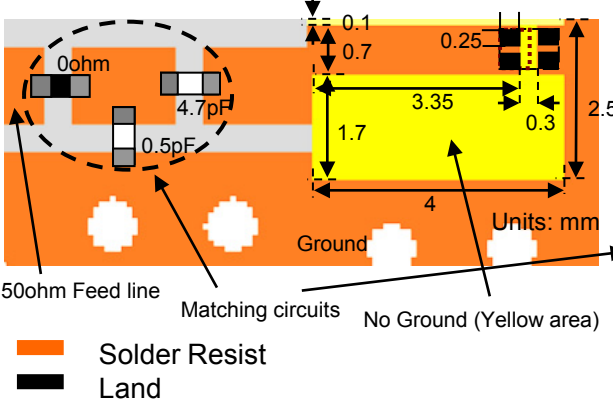

50ohm Feed line
Matching circuits
No Ground (Yellow area)

Units: mm

Legend:
█ Solder Resist
█ Land

- Attention: Matching circuits and component values will be different on the client's design, depending on PCB layout, geometry, etc. It is recommended that the designer leave available slots for a "pi" (or shunt-series-shunt) network. The antenna matching network values you see here are used when antenna is mounted on Johanson's evaluation board.
- Need help laying out the antenna, want us to review the design (free!), require the Gerber files for this EVB, or would like us to obtain the new tuning values of your PCB (fee may apply)? Go to: www.johansontechnology.com/component/techquestion
- More antenna support info at: www.johansontechnology.com/ipcantennaservices

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
 4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.0

2014 Johanson Technology, Inc. All Rights Reserved


"High Frequency Ceramic Solutions"

5.1 to 5.9 GHz, micro antenna optimized for PCB edge mount. Great for WiFi P/N 5500AT07A0900 and V2V (Vehicle to Vehicle communications)

Detail Specification: 10/30/2014

Page 2 of 4

Johanson Evaluation Board Dimension and Characteristics of the antenna design

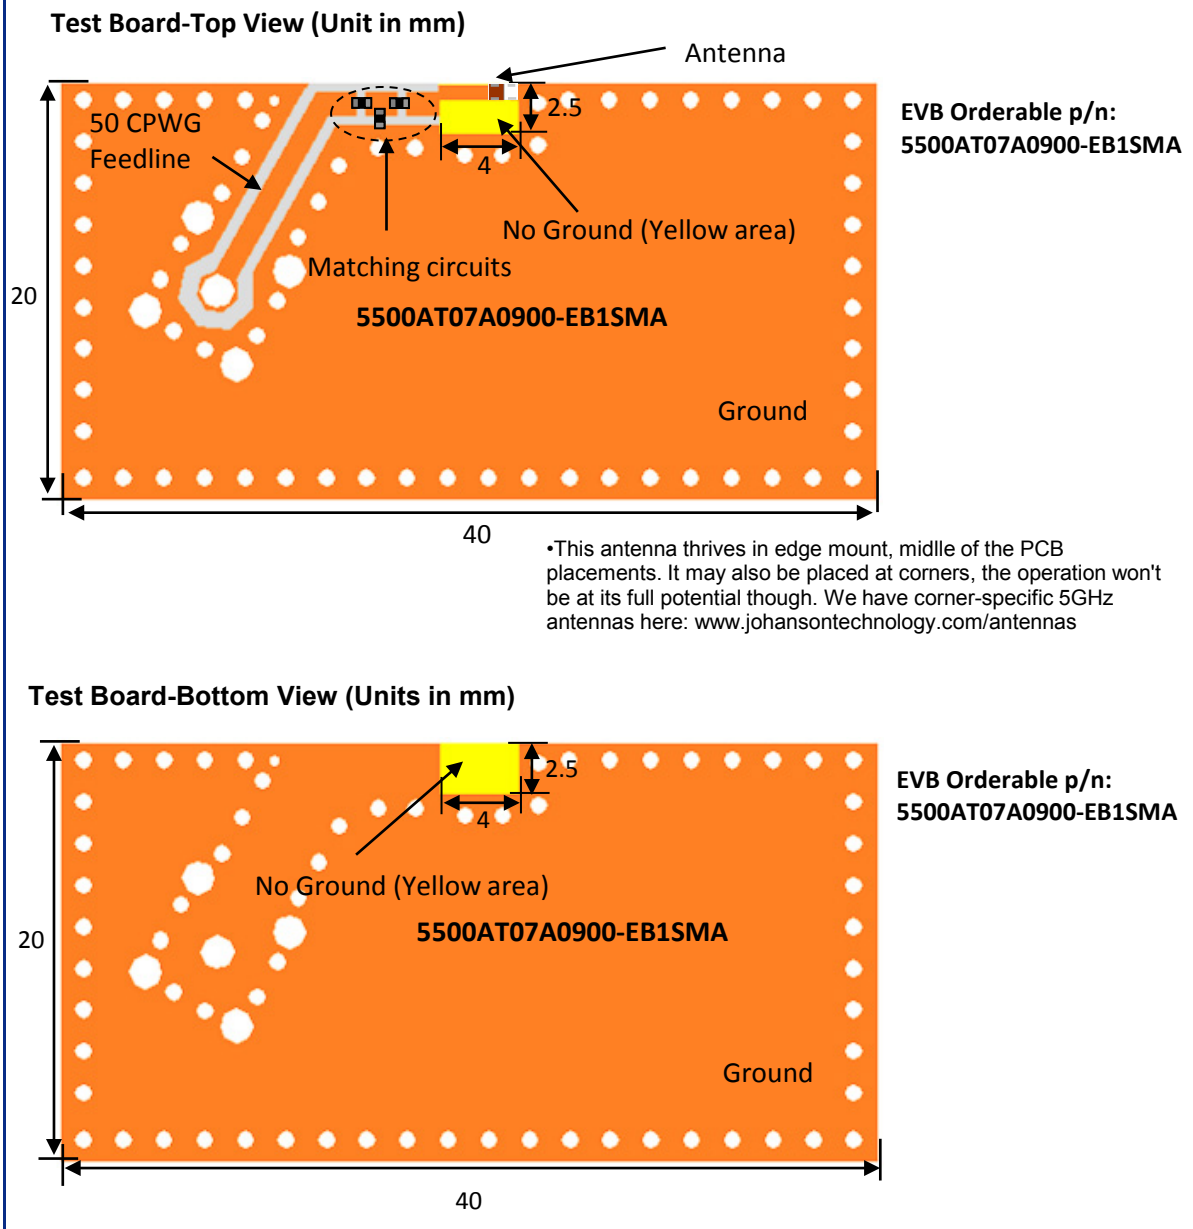

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821
Ver 1.0 2014 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

5.1 to 5.9 GHz, micro antenna optimized for PCB edge mount. Great for WiFi P/N 5500AT07A0900 and V2V (Vehicle to Vehicle communications)







Detail Specification: 10/30/2014

Page 3 of 4

Typical Radiation Patterns @25°C

Radiation Patterns

XY-V/XY-H

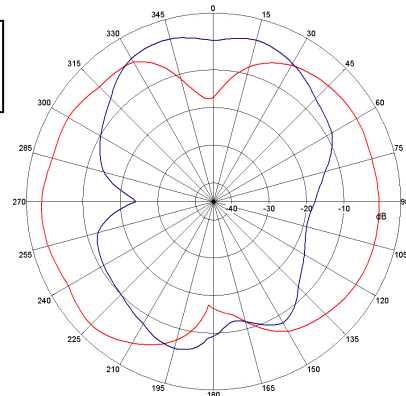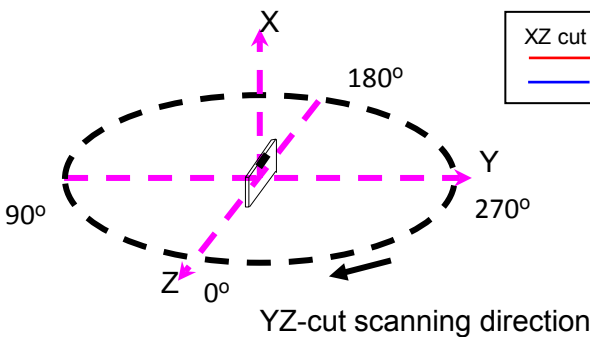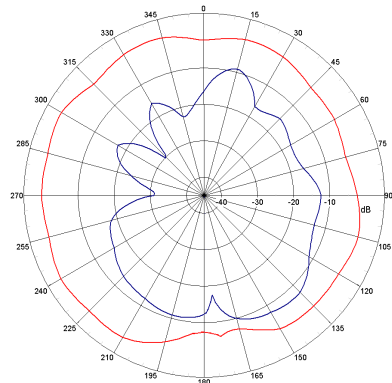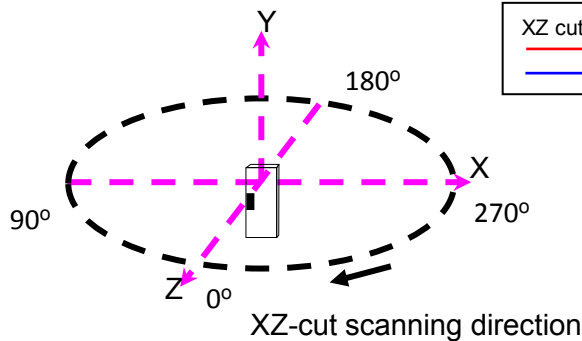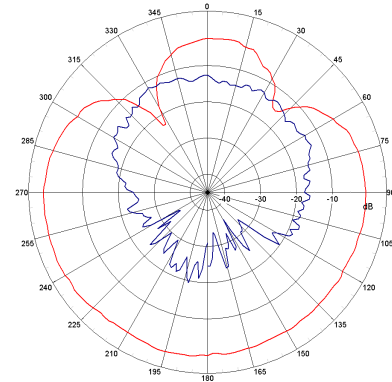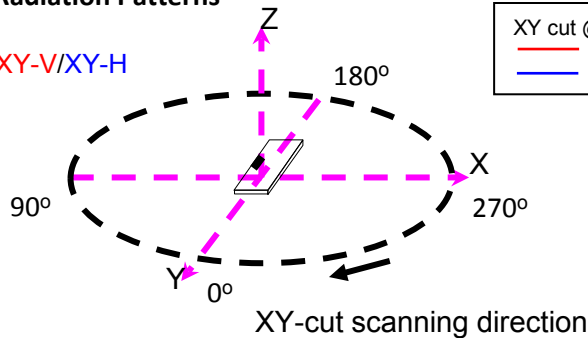

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.0

2014 Johanson Technology, Inc. All Rights Reserved


"High Frequency Ceramic Solutions"

5.1 to 5.9 GHz, micro antenna optimized for PCB edge mount. Great for WiFi P/N 5500AT07A0900 and V2V (Vehicle to Vehicle communications)

Detail Specification: 10/30/2014

Page 4 of 4

Typical Electrical Performance (T=25°C)

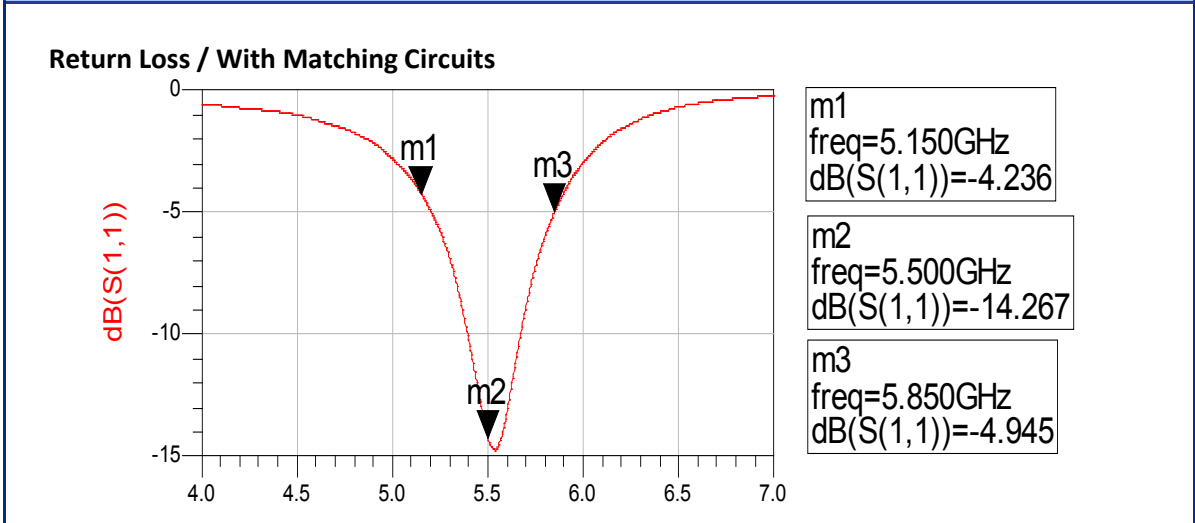

Packaging information

www.johansontechnology.com/ipcpackaging.html

Soldering Information

www.johansontechnology.com/ipcsoldering-profile

Antenna layout and tuning techniques (How to obtain the new antenna matching values)

www.johansontechnology.com/tuning

Antenna layout review, tuning, and characterization services

www.johansontechnology.com/ipcantennaservices

For layout review contact our Applications Team at:

www.johansontechnology.com/component/techquestion

RoHS Compliance

www.johansontechnology.com/technical-notes/rohs-compliance.html

MSL Info

www.johansontechnology.com/technical-notes/msl-rating.html

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com
4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 1.0

2014 Johanson Technology, Inc. All Rights Reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Johanson](#) manufacturer:

Other Similar products are found below :

[GAN30084EU](#) [930-033-R](#) [GW17.07.0250E](#) [1513563-1](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [W3908B0100](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [66089-2406](#) [SPDA17RP918](#) [A09-F8NF-M](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [W3593B0100](#) [W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1044](#) [W1049B090](#) [A75-001](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [EXB148BN](#) [0600-00060](#) [TRA9020S3PBN-001](#) [Y4503](#) [GD5W-28P-NF](#) [MA9-7N](#) [GD53-25](#) [GD5W-21P-NF](#) [C37](#) [MAF94051](#) [MA9-5N](#) [EXD420PL](#) [B1322NR](#) [QWFTB120](#) [MAF94271](#) [MAF94300](#) [GPSMB301](#) [FG4403](#) [AO-AGSM-OM54](#) [5200232](#) [MIKROE-2349](#) [WCM.01.0111](#) [MIKROE-2393](#) [MIKROE-2352](#)