
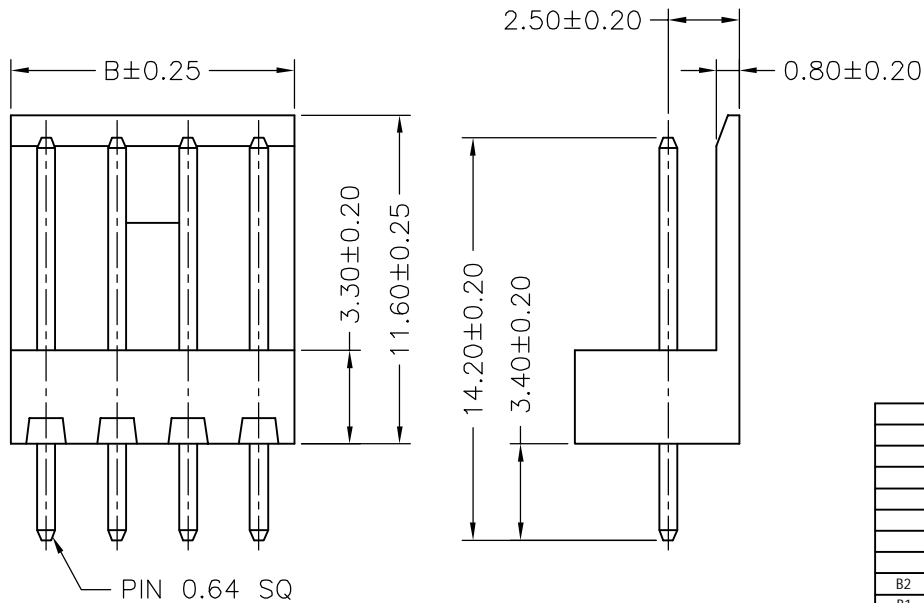



SPECIFICATIONS
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstanding Voltage: 800V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A2540WV-02P	2.50	5.00
A2540WV-03P	5.00	7.50
A2540WV-04P	7.50	10.00
A2540WV-05P	10.00	12.50
A2540WV-06P	12.50	15.00
A2540WV-07P	15.00	17.50
A2540WV-08P	17.50	20.00
A2540WV-09P	20.00	22.50
A2540WV-10P	22.50	25.00
A2540WV-11P	25.00	27.50
A2540WV-12P	27.50	30.00
A2540WV-13P	30.00	32.50
A2540WV-14P	32.50	35.00
A2540WV-15P	35.00	37.50

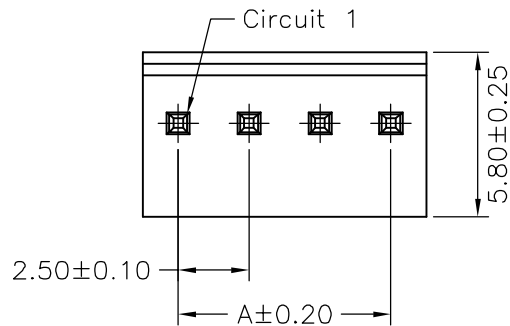

				UNIT	SCALE	SHEET	TITLE:
				mm		1 of 1	
		DRAWN BY		APPROVED BY		DRAW NO. : A2540WV-XP	
		董正一		董正一			
		2001.02.01		2001.02.01			
		GENERAL TOLERANCE					
B2	REVISE	2006.09.18					
B1	REVISE	2006.05.15	X. X±0.25	ANGLE±			
B0	NEW RELEASE	2005.12.23	X. XX±0.15				
REV.	DESCRIPTION	DATE	X. XXX±0.05				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Joint Tech](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)