
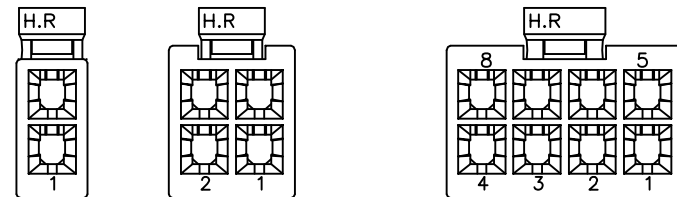


SPECIFICATIONS

Current Rating: 9A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
C4255HF-2X01P-V0	---	5.70
C4255HF-2X02P-V0	4.20	9.60
C4255HF-2X03P-V0	8.40	13.80
C4255HF-2X04P-V0	12.60	18.00
C4255HF-2X05P-V0	16.80	22.20
C4255HF-2X06P-V0	21.00	26.40
C4255HF-2X07P-V0	25.20	30.60
C4255HF-2X08P-V0	29.40	34.80
C4255HF-2X09P-V0	33.60	39.00
C4255HF-2X10P-V0	37.80	43.20
C4255HF-2X11P-V0	42.00	47.40
C4255HF-2X12P-V0	46.20	51.60

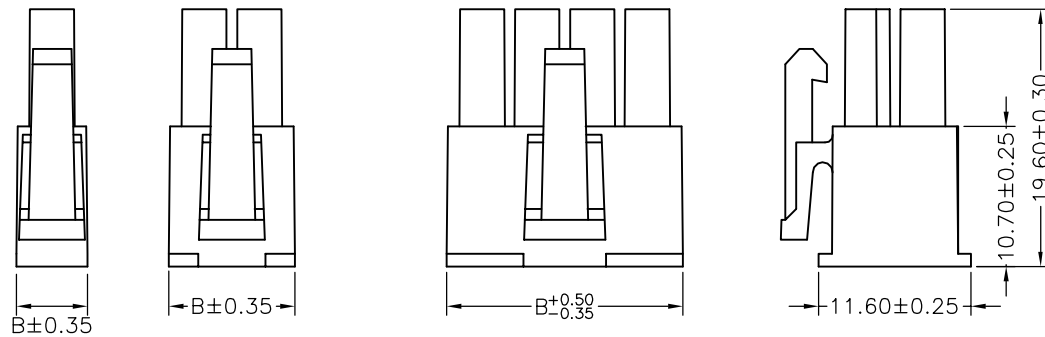

2X01P

2X02P

					UNIT	SCALE	SHEET	TITLE:
					mm		1 of 1	
DRAWN BY		APPROVED BY		4.20mm PITCH HOUSING-RECEPTACLE, MINI-FIT				
李勤		董正一						
2006.06.07		2006.06.07						
GENERAL TOLERANCE								
ANGLE±								
A3	REVISE	2008.12.02			DRAW NO.: C4255HF-2XNP-V0			
A2	REVISE	2006.09.11						
A1	REVISE	2006.06.26						
A0	NEW RELEASE	2006.06.07			REV. A3			
REV.	DESCRIPTION	DATE						

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Joint Tech](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)