

FEATURES


- Small Surface Mounting
- High Speed :t=1.2ns Typ.
- High Reliability With High Surge Current Handling Capability
- High speed switching

MECHANICAL DATA

- Case: SOD-323
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 5.48mg / 0.00019oz

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

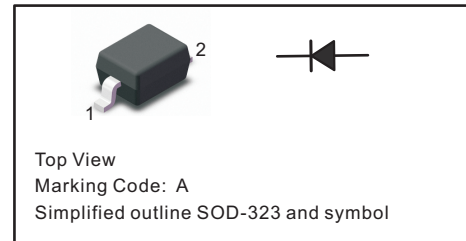
Maximum Ratings at 25 °C

Parameter	Symbols	1SS355	Units
Non-Repetitive Peak reverse voltage	V_{RM}	90	V
DC Reverse Voltage	V_R	80	V
Peak forward Current	I_{FM}	225	mA
Average Rectified Output Current	I_O	100	mA
Surge current (1s)	I_{surge}	500	mA
Typical Thermal Resistance (1)	$R_{\theta JA}$ $R_{\theta JC}$	170 60	°C/W
Operating and Storage Temperature Range	T_j, T_{stg}	-55 ~ +125	°C

(1) P.C.B. mounted with 8*8mm copper pad areas.

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbols	1SS355	Units
Forward voltage $I_F=100mA$	V_F	1.2	V
Reverse current $V_R=80V$	I_R	0.1	μA
Capacitance between terminals $V_R=0.5V$ $f=1MHz$	C_T	3	pF
Reverse Recovery Time $I_F=10mA, V_R=6V, R_L=100\Omega$	trr	4	ns

Fig.1 FORWARD CHARACTERISTICS

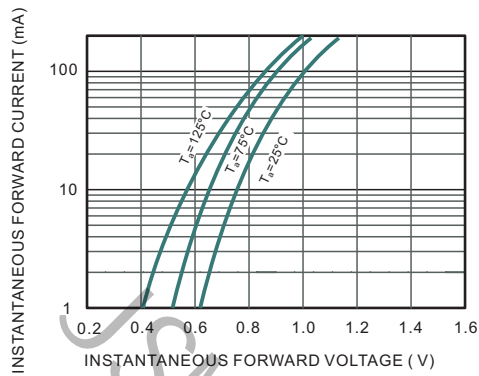


Fig.2 Typical Reverse Characteristics




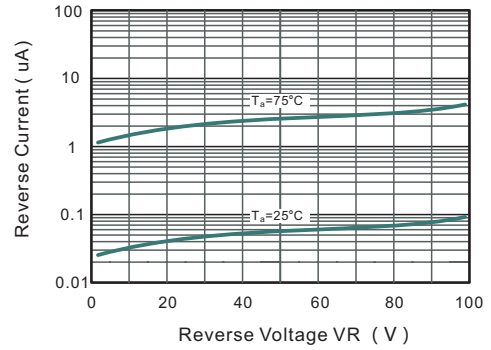


Fig.3 Typical Junction Capacitance

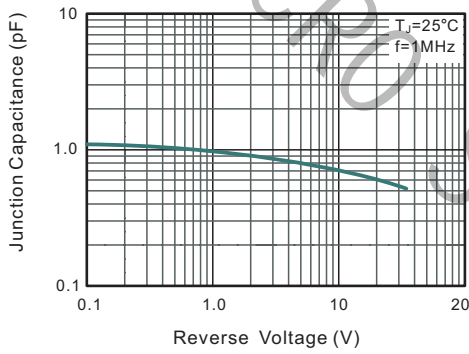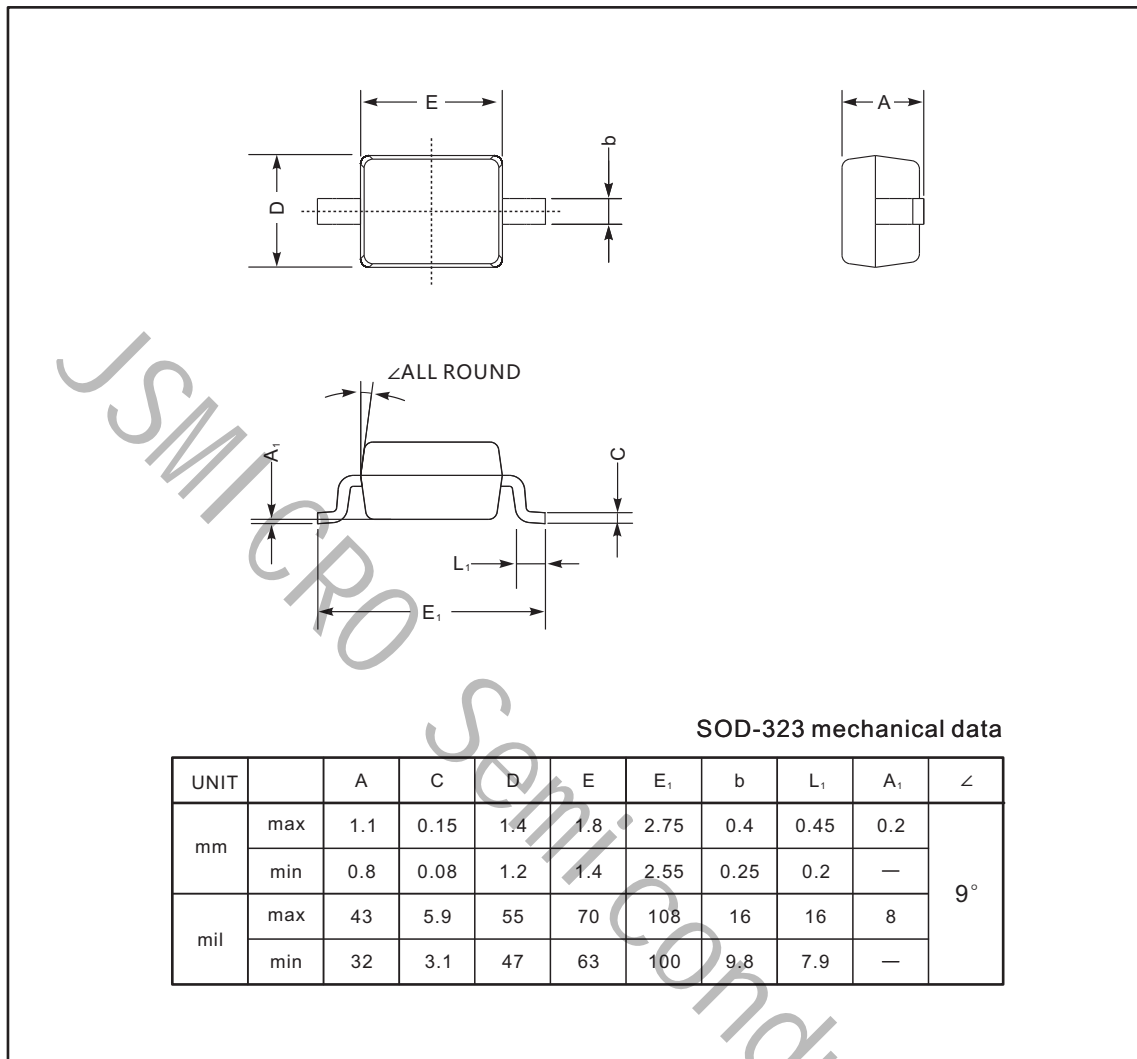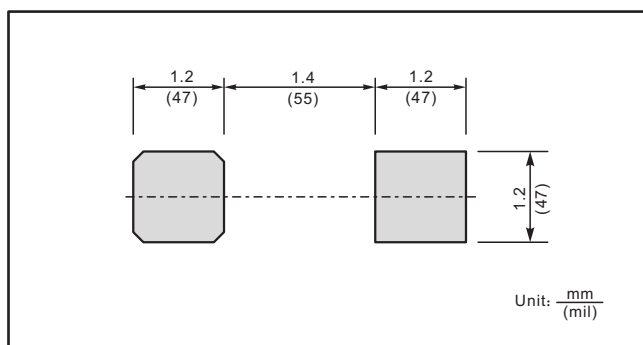

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-323

The recommended mounting pad size

Marking

Type number	Marking code
1SS355	A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [JSMSEMI manufacturer:](#)

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS193,LF](#) [1SS400CST2RA](#) [SDAA13](#)
[SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914BTR](#) [RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-](#)
[7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [JAN1N4454UR-1](#) [LL4151-GS18](#) [SMMSD4148T3G](#) [BYW95B/A52A](#)
[NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV70HDW-7](#) [BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-13](#) [BAS28 TR](#)
[VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [1SS388-TP](#) [RGP30D-E3/73](#) [VS-8EWF02S-M3](#) [BAV99TQ-13-F](#) [BAV99HDW-13](#)
[MMDB30-E28X](#) [IDP20C65D2XKSA1](#) [LS4148](#) [IDV15E65D2](#) [NSVM1MA152WAT1G](#) [HN4D02JU\(TE85L,F\)](#)