



Features


- Fast switching
- Low turn-on voltage
- PN junction guard ring for transient and ESD protection
- Available in lead free version.




BAT54



BAT54A




BAT54C



BAT54S

Mechanical Data

- Case: SOT-23
- Terminals: solderable per MIL-STD-202, Method 208



SOT-23

Ordering Information

Part Number	Package	Shipping	Marking Code
BAT54	SOT-23	3000pcs / Tape & Reel	KL1
BAT54A	SOT-23	3000pcs / Tape & Reel	KL2
BAT54C	SOT-23	3000pcs / Tape & Reel	KL3
BAT54S	SOT-23	3000pcs / Tape & Reel	KL4

Maximum Ratings (@ $T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Limits	Unit
Peak Repetitive Peak reverse voltage	V_{RRM}	30	V
Working Peak Reverse Voltage	V_{RWM}		
DC Reverse Voltage	V_R		
Forward Continuous Current	I_F	200	mA
Repetitive Peak Forward Current	I_{FRM}	300	mA
Forward surge current@ $t_p < 1\text{s}$	I_{FSM}	600	mA

Thermal Characteristics

Parameter	Symbol	Limits	Unit
Power Dissipation *	P_D	250	mW
Thermal resistance junction to ambient air	$R_{\theta JA}$	500	$^{\circ}C/W$
Thermal resistance junction to case	$R_{\theta JC}$	360	$^{\circ}C/W$
Junction temperature	T_J	125	$^{\circ}C$
Storage temperature range	T_{STG}	-55 to +150	$^{\circ}C$

Electrical Characteristics (@ $T_A=25^{\circ}C$ unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse Breakdown Voltage	$V_{(BR)}$	$I_R=100\mu A$	30	-	-	V
Forward voltage *1	V_F	$I_F=0.1mA$	-	-	0.24	V
		$I_F=1mA$	-	-	0.32	V
		$I_F=10mA$	-	-	0.40	V
		$I_F=30mA$	-	-	0.50	V
		$I_F=100mA$	-	-	0.8	V
Reverse current *2	I_R	$V_R=25V$	-	-	2	μA
Capacitance Between Terminals	C_T	$V_R=1V, f=1MHz$	-	-	10	pF
Reverse Recovery Time	t_{rr}	$I_F=I_R=10mA$ $I_{rr}=0.1I_R, R_L=100\Omega$	-	-	5	ns
*1: pulse test, $t_p \leq 300\mu s$						
*2: pulse test, $t_p \leq 5ms$						

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

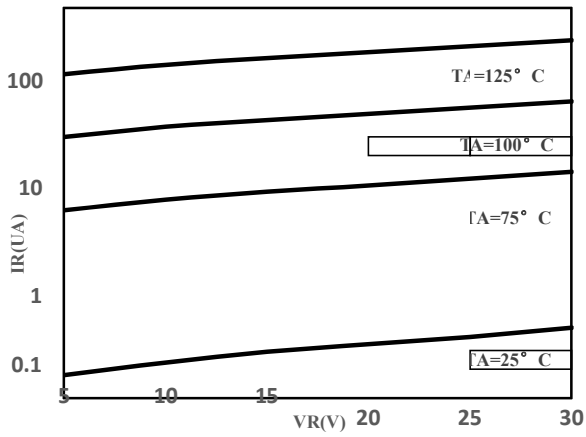


Fig.1- Typical Reverse Characteristic

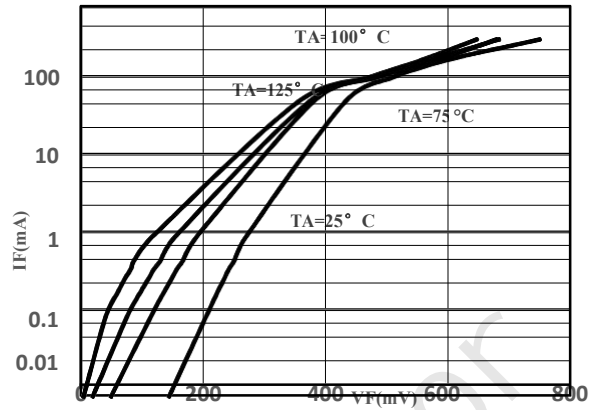


Fig.2- Typical Forward Characteristics

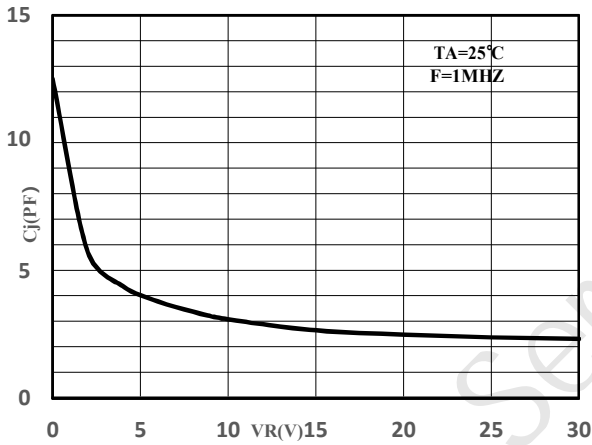


Fig.3-Capacitance Characteristics


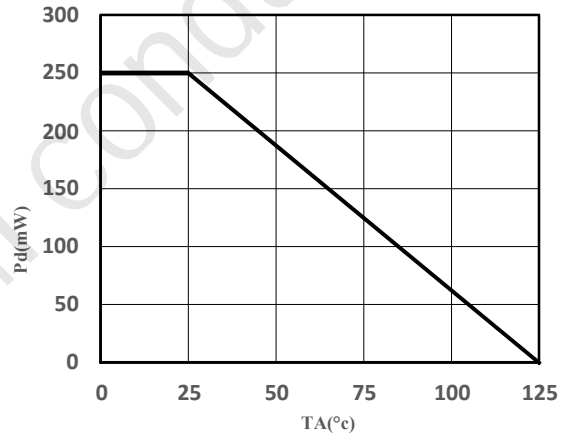


Fig.4- Derating Curve

Package Outline Dimensions (unit: mm)


SOT-23

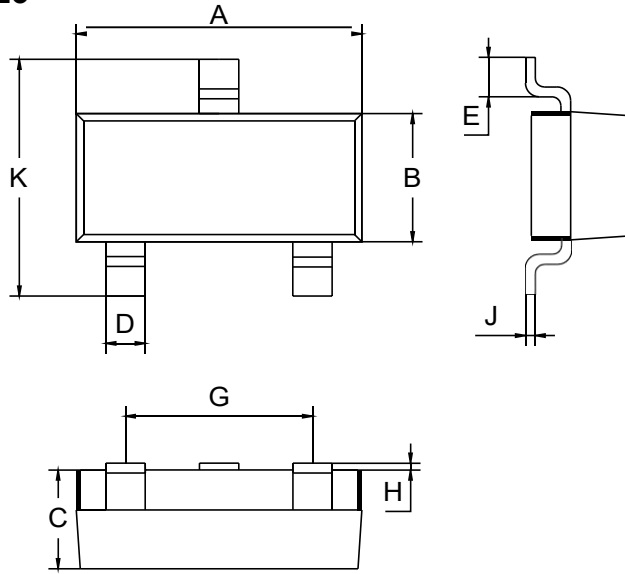

SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	0.90	1.10
D	0.30	0.50
E	0.35	0.48
G	1.80	2.00
H	0.02	0.10
J	0.05	0.15
K	2.20	2.60

Mounting Pad Layout (unit: mm)

SOT-23

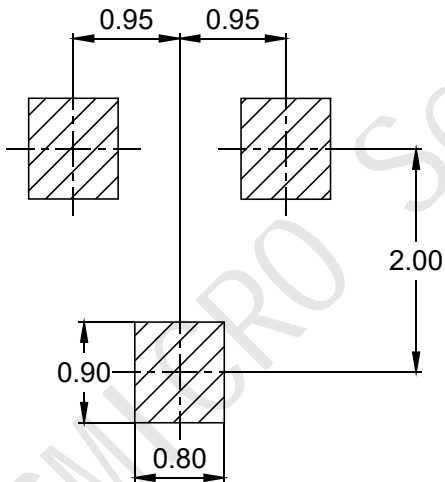

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [JSMSEMI](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS16E6433HTMA1](#)
[BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#)
[SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#)
[MBRB30H30CT-1G](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SK32A-TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NRVBM120LT1G](#)
[NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA2100-HF](#)
[ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [ACDBA260LR-HF](#) [ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ060-M3/5BT](#)
[NRVB130LSFT1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#)