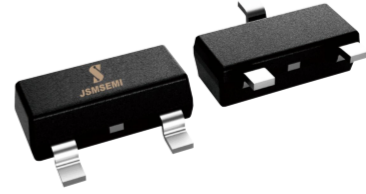


**FEATURE**

Low Saturation Voltage


**MAXIMUM RATINGS (T<sub>a</sub>=25°C unless otherwise noted)**

Symbol	Parameter	Value	Unit
V <sub>CBO</sub>	Collector-Base Voltage	50	V
V <sub>CEO</sub>	Collector-Emitter Voltage	50	V
V <sub>EBO</sub>	Emitter-Base Voltage	5	V
I <sub>C</sub>	Collector Current -Continuous	2	A
P <sub>C</sub>	Power Dissipation	0.35	W
R <sub>θJA</sub>	Thermal Resistance from Junction to Ambient	357	°C/W
P <sub>CM</sub>	Maximum Power Dissipation (note 1)	0.625	W
R <sub>θJA</sub>	Thermal Resistance from Junction to Ambient (note 1)	200	°C/W
T <sub>J</sub> , T <sub>stg</sub>	Operation Junction and Storage Temperature Range	-55~+150	°C









**ELECTRICAL CHARACTERISTICS (T<sub>a</sub>=25°C unless otherwise specified)**

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V <sub>(BR)CBO</sub>	I <sub>C</sub> =100μA, I <sub>E</sub> =0	50			V
Collector-emitter breakdown voltage (note 2)	V <sub>(BR)CEO</sub>	I <sub>C</sub> =10mA, I <sub>B</sub> =0	50			V
Emitter-base breakdown voltage	V <sub>(BR)EBO</sub>	I <sub>E</sub> =100μA, I <sub>C</sub> =0	5			V
Collector cut-off current	I <sub>CBO</sub>	V <sub>CB</sub> =40V, I <sub>E</sub> =0			100	nA
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> =4V, I <sub>C</sub> =0			100	nA
DC current gain (note 2)	h <sub>FE(1)</sub>	V <sub>CE</sub> =2V, I <sub>C</sub> =10mA	200			
	h <sub>FE(2)</sub>	V <sub>CE</sub> =2V, I <sub>C</sub> =0.2A	300			
	h <sub>FE(3)</sub>	V <sub>CE</sub> =2V, I <sub>C</sub> =1A	200			
	h <sub>FE(4)</sub>	V <sub>CE</sub> =2V, I <sub>C</sub> =2A	100			
	h <sub>FE(5)</sub>	V <sub>CE</sub> =2V, I <sub>C</sub> =6A		40		
Collector-emitter saturation voltage (note 2)	V <sub>CE(sat)1</sub>	I <sub>C</sub> =0.1A, I <sub>B</sub> =10mA			20	mV
	V <sub>CE(sat)2</sub>	I <sub>C</sub> =1A, I <sub>B</sub> =10mA			200	mV
	V <sub>CE(sat)3</sub>	I <sub>C</sub> =2A, I <sub>B</sub> =100mA			220	mV
Base-emitter saturation voltage (note 2)	V <sub>BE(sat)</sub>	I <sub>C</sub> =2A, I <sub>B</sub> =50mA			1	V
Base-emitter on voltage (note 2)	V <sub>BE(on)</sub>	I <sub>C</sub> =2A, V <sub>CE</sub> =2V			1	V
Output capacitance	C <sub>ob</sub>	V <sub>CB</sub> =10V, f=1MHz			20	pF
Turn-on time	t <sub>(on)</sub>	V <sub>CC</sub> =10V, I <sub>C</sub> =1A, I <sub>B1</sub> =-I <sub>B2</sub> =10mA		170		ns
Turn-off time	t <sub>(off)</sub>			750		ns
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> =10V, I <sub>C</sub> =50mA, f=100MHz	100			MHz

**Notes :**


1. Maximum power dissipation is calculated assuming that the device is mounted on a ceramic substrate measuring 15x15x0.6mm.
2. Pulse test: Pulse width≤300μs, duty cycle≤2.0%.

Typical Characteristics

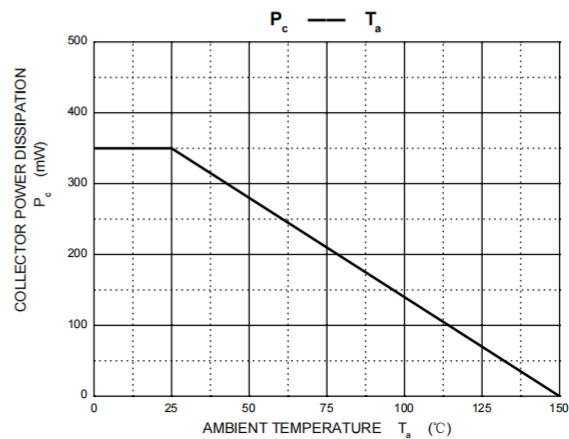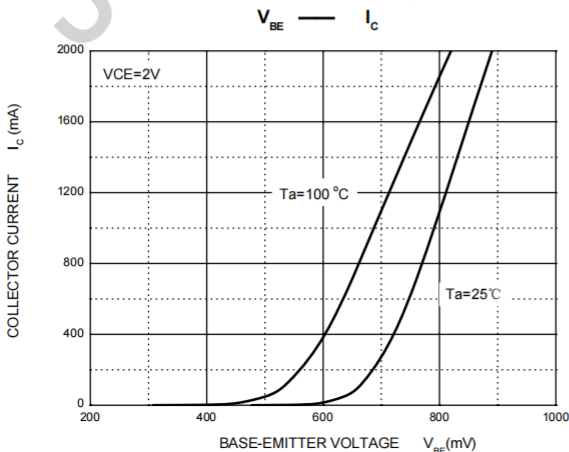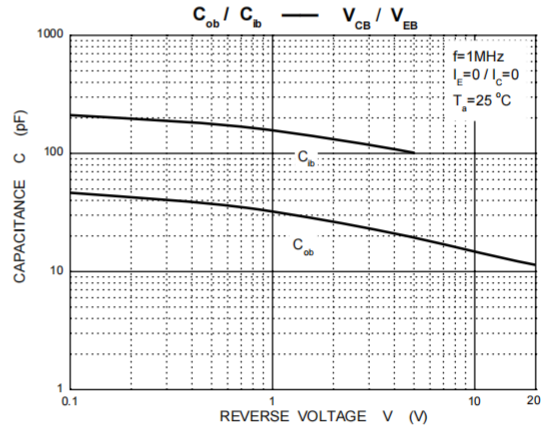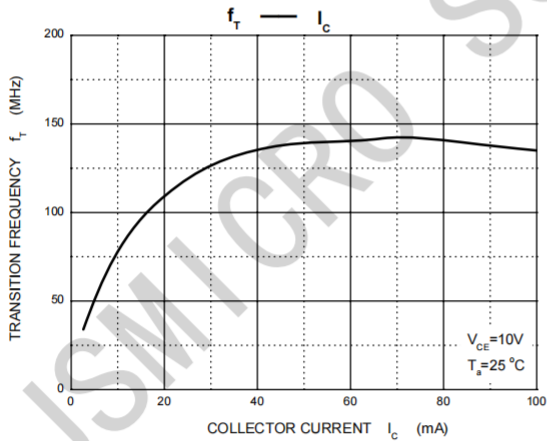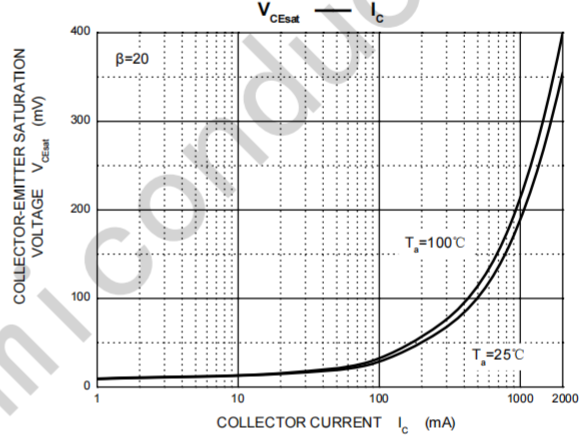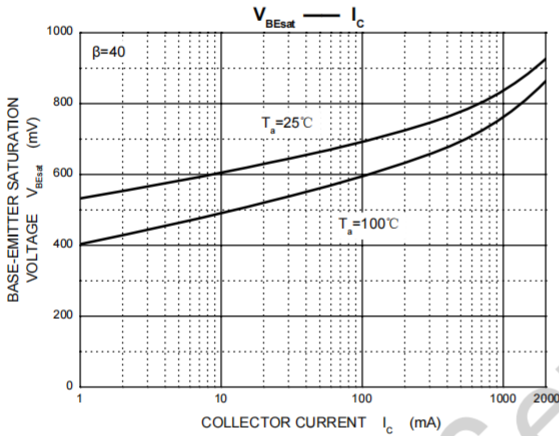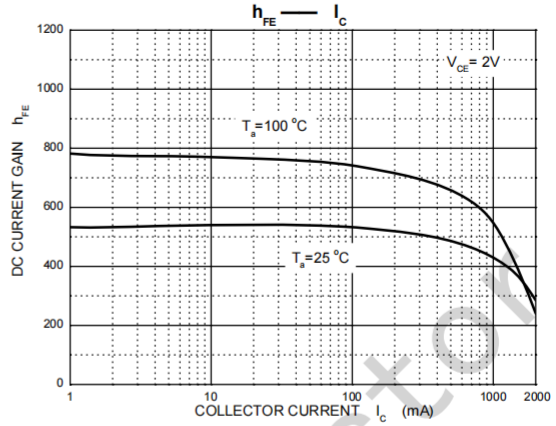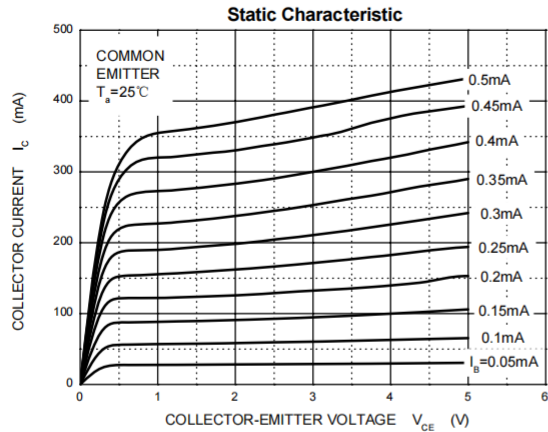

## Package Information

SOT-23

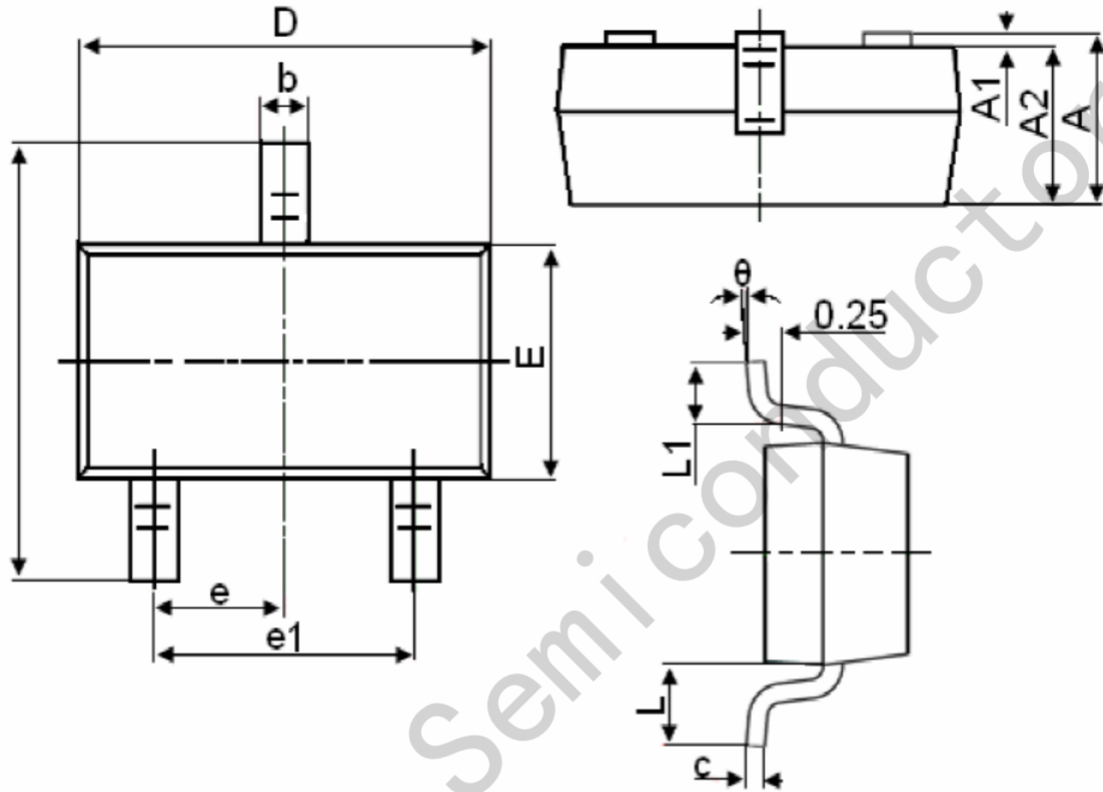

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [JSMSEMI manufacturer](#):*

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [BC856BW-13-F](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#) [JAN2N3507](#)