

The JSM9435 uses advanced trench technology to provide excellent RDS(ON), shoot-through immunity, body diode characteristics and ultra-low gate resistance. This device is ideally suited for use as a low side switch in Notebook CPU core power conversion.

JSM9435采用先进的沟道技术，提供出色的无线电数据系统（ON）、穿透抗扰性、体二极管特性和超低栅极电阻。该设备非常适合用作笔记本电脑CPU核心功率转换的低端开关。

## 主要特性/Features

先进的沟槽工艺技术 Advanced trench process technology

高密度单元设计，超低导通电阻 High density cell design for ultra low on-resistance


高功率和电流处理能力 High power and current handling capability

## 应用/Application

蓄电池开关 Battery Switch


负荷开关 Load Switch

## 引脚定义/pin definition

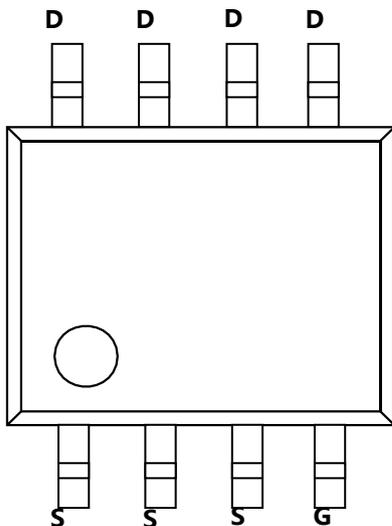

**电性能参数/Electrical Characteristics (TA=25°C unless otherwise noted )**

Parameter	Description	Min.	Typ.	Max.	Test Conditions
V(BR)DSS	Drain-to-Source Breakdown Voltage	-30V			$V_{GS} = 0V, I_D = -250\mu A$
ID(Device Ref.)	Continuous Drain Current			-5.1A	$T_J = 25^\circ C$
RDS(on)	Static Drain-to-Source On-Resistance		43mΩ	55mΩ	$V_{GS} = -10V, I_D = -5.1A$
RDS(on)	Static Drain-to-Source On-Resistance		62mΩ	90mΩ	$V_{GS} = -4.5V, I_D = -4.2A$
VGS(th)	Gate Threshold Voltage	-1.0V	-1.5V	-3.0V	$V_{DS} = V_{GS}, I_D = -250\mu A$
IDSS	Drain-to-Source Leakage Current			1μA	$V_{DS} = -24V, V_{GS} = 0V, T_J = 25^\circ C$
IGSS	Gate-to-Source Leakage Current			±100nA	$V_{GS} = \pm 20V$
$T_J$	Operating Junction and Storage Temperature Range	-55°C to 150°C Max.			
TSTG					

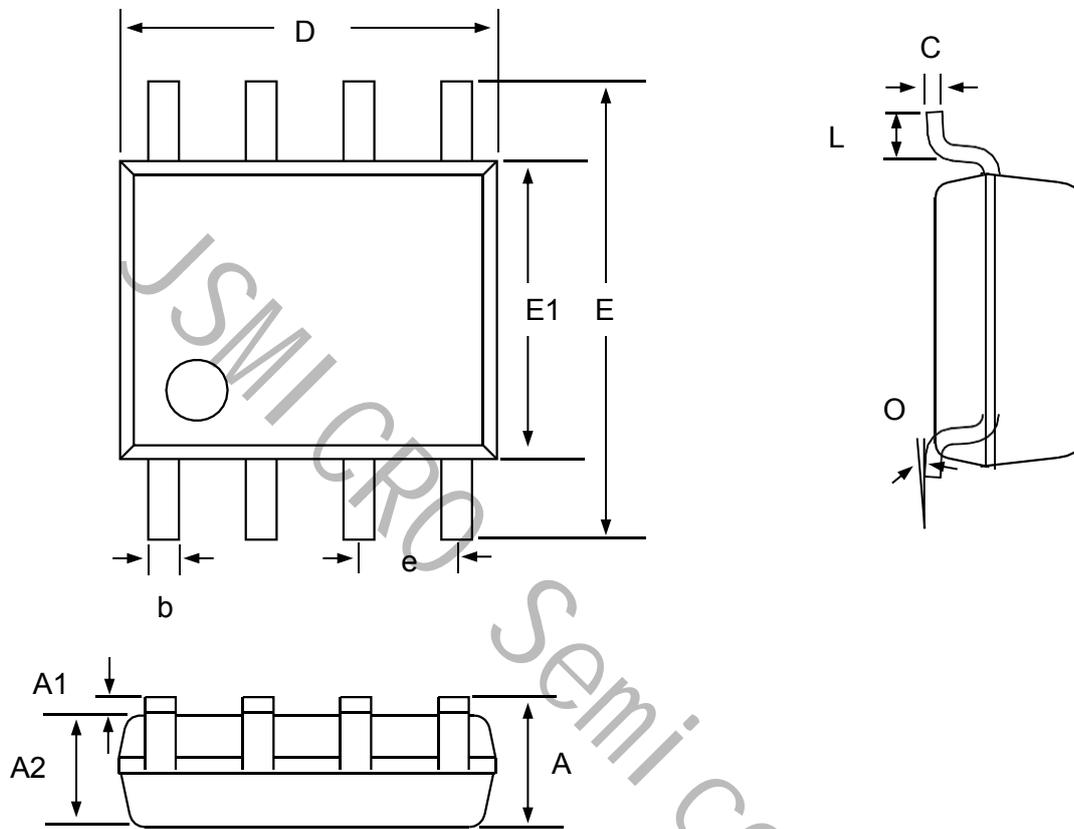

Symbol	Dim in mm		
	Min	Nor	Max
A	1.350	1.550	1.750
A1	0.100	0.175	0.250
A2	1.350	1.450	1.550
b	0.330	0.420	0.510
c	0.170	0.210	0.250
D	4.800	4.900	5.000
e	1.270(BSC)		
E	3.800	3.900	4.000
E1	0.400	0.835	1.2700
L	0°	4°	8°

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [JSMSEMI](#) manufacturer:*

Other Similar products are found below :

[614233C](#) [648584F](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#)  
[405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#) [BSC884N03MS G](#) [BSF024N03LT3 G](#)  
[PSMN4R2-30MLD](#) [TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-](#)  
[7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#)  
[SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [STU5N65M6](#)  
[C3M0021120D](#) [DMN13M9UCA6-7](#) [BSS340NWH6327XTSA1](#) [MCM3400A-TP](#) [DMTH10H4M6SPS-13](#) [IRF40SC240ARMA1](#)  
[IPS60R1K0PFD7SAKMA1](#)