


FEATURES

- Output current in excess of 1.5A
- Fixed output voltage of 5V, 6V, 8V, 9V, 10V, 12V, 15V, 18V and 24V available
- Internal thermal overload protection
- Output transition Safe-Area compensation



PIN1 : IN
PIN 2 : GND
PIN 3 : OUT

ABSOLUTE MAXIMUM RATINGS

(Operating temperature range applies unless otherwise specified)

PARAMETER	SYMBOL	RATING	UNIT
Input voltage(for $V_o=5\sim 18V$) (for $V_o=24V$)	V_I	35 40	V
Output Current	I_o	1	A
Power Dissipation	PD	Internally Limited	W
Operating Junction Temperature Range	TOPR	-20~150	°C
Storage Temperature Range	TSTG	-55~150	°C

L7805CV ELECTRICAL CHARACTERISTICS

($V_I=10V$, $I_o=0.5A$, $T_j=0^{\circ}C - 125^{\circ}C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j=25^{\circ}C$, $I_o=5mA - 1.0A$	4.80	5.0	5.20	V
		$V_I = 7.5V$ to $20V$, $I_o=5mA - 1.0A$, $PD < 15W$	4.75		5.25	V
Load Regulation	ΔV_o	$T_j=25^{\circ}C$, $I_o=5mA - 1.5A$			50	mV
		$T_j=25^{\circ}C$, $I_o=0.25A - 0.75A$			25	mV
Line regulation	ΔV_o	$V_I = 7V$ to $25V$, $T_j=25^{\circ}C$			50	mV
		$V_I = 7.5V$ to $20V$, $T_j=25^{\circ}C$, $I_o=1A$			50	mV
Quiescent Current	I_q	$T_j=25^{\circ}C$, $I_o=<1A$			8.0	mA
Quiescent Current Change	ΔI_q	$V_I = 7.5V$ to $20V$			1.0	mA
	ΔI_q	$I_o=5mA - 1.0A$			0.5	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$		40		μV
Temperature coefficient of V_o	$\Delta V_o/\Delta T$	$I_o=5mA$		-0.6		$mV/^{\circ}C$
Ripple Rejection	RR	$V_I = 8V - 18V$, $f=120Hz$, $T_j=25^{\circ}C$	62	80		dB
Peak Output Current	I_{PK}	$T_j=25^{\circ}C$		1.8		A
Short-Circuit Current	I_{SC}	$V_I=35V$, $T_j=25^{\circ}C$		250		mA
Dropout Voltage	V_d	$T_j=25^{\circ}C$		2.0		V

L7806CV ELECTRICAL CHARACTERISTICS

($V_I=11V$, $I_O=0.5A$, $T_j=0^{\circ}C - 125^{\circ}C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified) (Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j=25^{\circ}C$, $I_o=5mA - 1.0A$	5.76	6.0	6.24	V
		$V_I = 8.5V$ to $21V$, $I_o=5mA - 1.0A$, $PD<15W$	5.70		6.30	V
Load Regulation	ΔV_o	$T_j=25^{\circ}C$, $I_o=5mA - 1.5A$			60	mV
		$T_j=25^{\circ}C$, $I_o=0.25A - 0.75A$			30	mV
Line regulation	ΔV_o	$V_I = 8V$ to $25V$, $T_j=25^{\circ}C$			60	mV
		$V_I = 8.5V$ to $21V$, $T_j=25^{\circ}C$, $I_o=1A$			60	mV
Quiescent Current	I_q	$T_j=25^{\circ}C$, $I_o=<1A$			8.0	mA
Quiescent Current Change	ΔI_q	$V_I = 8.5V$ to $21V$			1.0	mA
	ΔI_q	$I_o=5mA - 1.0A$			0.5	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$		45		μV
Temperature coefficient of V_o	$\Delta V_o/\Delta T$	$I_o=5mA$		-0.7		$mV/^{\circ}C$
Ripple Rejection	RR	$V_I = 9V - 19V$, $f=120Hz$, $T_j=25^{\circ}C$	59	75		dB
Peak Output Current	I_{PK}	$T_j=25^{\circ}C$		1.8		A
Short-Circuit Current	I_{SC}	$V_I=35V$, $T_j=25^{\circ}C$		250		mA
Dropout Voltage	V_d	$T_j=25^{\circ}C$		2.0		V

L7808CV ELECTRICAL CHARACTERISTICS

($V_I=14V$, $I_O=0.5A$, $T_j=0^{\circ}C - 125^{\circ}C$, $C_1=0.33\mu F$, $C_0=0.1\mu F$, unless otherwise specified) (Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V_o	$T_j=25^{\circ}C$, $I_o=5mA - 1.0A$	7.68	8.0	8.32	V
		$V_I = 10.5V$ to $23V$, $I_o=5mA - 1.0A$, $PD<15W$	7.60		8.40	V
Load Regulation	ΔV_o	$T_j=25^{\circ}C$, $I_o=5mA - 1.5A$			80	mV
		$T_j=25^{\circ}C$, $I_o=0.25A - 0.75A$			40	mV
Line regulation	ΔV_o	$V_I = 10.5V$ to $25V$, $T_j=25^{\circ}C$			80	mV
		$V_I = 10.5V$ to $23V$, $T_j=25^{\circ}C$, $I_o=1A$			80	mV
Quiescent Current	I_q	$T_j=25^{\circ}C$, $I_o=<1A$			8.0	mA
Quiescent Current Change	ΔI_q	$V_I = 10.5V$ to $23V$			1.0	mA
	ΔI_q	$I_o=5mA - 1.0A$			0.5	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$		58		μV
Temperature coefficient of V_o	$\Delta V_o/\Delta T$	$I_o=5mA$		-0.9		$mV/^{\circ}C$
Ripple Rejection	RR	$V_I = 11.5V$ to $21.5V$, $f=120Hz$, $T_j=25^{\circ}C$	56	72		dB
Peak Output Current	I_{PK}	$T_j=25^{\circ}C$		1.8		A
Short-Circuit Current	I_{SC}	$V_I=35V$, $T_j=25^{\circ}C$		250		mA
Dropout Voltage	V_d	$T_j=25^{\circ}C$		2.0		V

L7809CV ELECTRICAL CHARACTERISTICS

(VI=15V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25°C, Io=5mA - 1.0A	8.64	9.0	9.36	V
		VI =11.5V to 24V, Io=5mA - 1.0A,PD<15W	8.55		9.45	V
Load Regulation	ΔV_o	Tj=25°C,Io=5mA - 1.5A			90	mV
		Tj=25°C,Io=0.25A - 0.75A			45	mV
Line regulation	ΔV_o	VI =11.5V to 25 V, Tj=25°C, PD<15W			90	mV
		VI =11.5V to 24V,Tj=25°C, Io<=1A			90	mV
Quiescent Current	Iq	Tj=25°C, Io=<1A			8.0	mA
Quiescent Current Change	ΔI_q	VI =11.5V to 24V			1.0	mA
	ΔI_q	Io=5mA - 1.0A			0.5	mA
Output Noise Voltage	VN	10Hz<=f<=100kHz		58		μ V
Temperature coefficient of Vo	$\Delta V_o/\Delta T$	Io=5mA		-1.1		$mV/^{\circ}C$
Ripple Rejection	RR	VI =12.5V to 22.5V, f=120Hz,Tj=25°C	56	72		dB
Peak Output Current	IPK	Tj=25°C		1.8		A
Short-Circuit Current	Isc	VI=35V, Tj=25°C		250		mA
Dropout Voltage	Vd	Tj=25°C		2.0		V

L7810CV ELECTRICAL CHARACTERISTICS

(VI=16V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25°C, Io=5mA - 1.0A	9.60	10.0	10.40	V
		VI =12.5V to 25V, Io=5mA - 1.0A,PD<15W	9.50		10.50	V
Load Regulation	ΔV_o	Tj=25°C,Io=5mA - 1.5A			100	mV
		Tj=25°C,Io=0.25A - 0.75A			50	mV
Line regulation	ΔV_o	VI =13V to 25V,Tj=25°C			100	mV
		VI =13V to 25V, Tj=25°C,Io<=1A			100	mV
Quiescent Current	Iq	Tj=25°C, Io=<1A			8.0	mA
Quiescent Current Change	ΔI_q	VI =12.6V to 25V			1.0	mA
	ΔI_q	Io=5mA - 1.0A			0.5	mA
Output Noise Voltage	VN	10Hz<=f<=100kHz		58		μ V
Temperature coefficient of Vo	$\Delta V_o/\Delta T$	Io=5mA		-1.1		$mV/^{\circ}C$
Ripple Rejection	RR	VI =13V - 23V,f=120Hz,Tj=25°C	56	72		dB
Peak Output Current	IPK	Tj=25°C		1.8		A
Short-Circuit Current	Isc	VI=35V, Tj=25°C		250		mA
Dropout Voltage	Vd	Tj=25°C		2.0		V

L7812CV ELECTRICAL CHARACTERISTICS

(VI=19V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25°C, Io=5mA - 1.0A	11.52	12.0	12.48	V
		VI =14.5V to 27V, Io=5mA - 1.0A,PD<15W	11.40		12.60	V
Load Regulation	ΔV_o	Tj=25°C,Io=5mA - 1.5A			120	mV
		Tj=25°C,Io=0.25A - 0.75A			60	mV
Line regulation	ΔV_o	VI =14.5V to 30V,Tj=25°C			120	mV
		VI =14.6V to 27V,Tj=25°C, Io=1A			120	mV
Quiescent Current	Iq	Tj=25°C, Io=<1A			8.0	mA
Quiescent Current Change	ΔI_q	VI =14.5V to 30V			1.0	mA
	ΔI_q	Io=5mA - 1.0A			0.5	mA
Output Noise Voltage	VN	10Hz<=f<=100kHz		75		μ V
Temperature coefficient of Vo	$\Delta V_o/\Delta T$	Io=5mA		-1.5		mV/°C
Ripple Rejection	RR	VI =15V - 25V,f=120Hz,Tj=25°C	55	72		dB
Peak Output Current	IPK	Tj=25°C		1.8		A
Short-Circuit Current	Isc	VI=35V, Tj=25°C		250		mA
Dropout Voltage	Vd	Tj=25°C		2.0		V

L7815CV ELECTRICAL CHARACTERISTICS

(VI=23V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25°C, Io=5mA - 1.0A	14.40	15.0	15.60	V
		VI =17.5V to 30V, Io=5mA - 1.0A,PD<15W	14.25		15.75	V
Load Regulation	ΔV_o	Tj=25°C,Io=5mA - 1.5A			150	mV
		Tj=25°C,Io=0.25A - 0.75A			75	mV
Line regulation	ΔV_o	VI =18.5V to 30V,Tj=25°C			150	mV
		VI =17.7V to 30V, Tj=25°C, Io =1A			150	mV
Quiescent Current	Iq	Tj=25°C, Io=<1A			8.0	mA
Quiescent Current Change	ΔI_q	VI =17.5V to 30V			1.0	mA
	ΔI_q	Io=5mA - 1.0A			0.5	mA
Output Noise Voltage	VN	10Hz<=f<=100kHz		90		μ V
Temperature coefficient of Vo	$\Delta V_o/\Delta T$	Io=5mA		-1.8		mV/°C
Ripple Rejection	RR	VI =18.5V to 28.5V f=120Hz,Tj=25°C	54	70		dB
Peak Output Current	IPK	Tj=25°C		1.8		A
Short-Circuit Current	Isc	VI=35V, Tj=25°C		250		mA
Dropout Voltage	Vd	Tj=25°C		2.0		V

L7818CV ELECTRICAL CHARACTERISTICS

(VI=27V, Io=0.5A, Tj= 0°C - 125°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25°C, Io=5mA - 1.0A	17.28	18.0	18.72	V
		VI =21V to 33V,Io=5mA - 1.0A	17.10		18.90	V
Load Regulation	ΔV_o	Tj=25°C,Io=5mA - 1.5A			180	mV
		Tj=25°C,Io=0.25A - 0.75A			90	mV
Line regulation	ΔV_o	VI =21V to 33V,Tj=25°C			180	mV
		VI =21V to 33V, Tj=25°C, Io =<1A,PD<15W			180	mV
Quiescent Current	Iq	Tj=25°C, Io=<1A			8.0	mA
Quiescent Current Change	ΔI_q	VI =21.5V to 33V			1.0	mA
	ΔI_q	Io=5mA - 1.0A			0.5	mA
Output Noise Voltage	VN	10Hz<=f<=100kHz		110		μ V
Temperature coefficient of Vo	$\Delta V_o/\Delta T$	Io=5mA		-2.2		$mV/^{\circ}C$
Ripple Rejection	RR	VI =22V - 32V,f=120Hz,Tj=25°C	53	69		dB
Peak Output Current	IPK	Tj=25°C		1.8		A
Short-Circuit Current	Isc	VI=35V, Tj=25°C		250		mA
Dropout Voltage	Vd	Tj=25°C		2.0		V

L7824CV ELECTRICAL CHARACTERISTICS


(VI=33V, Io=0.5A, Tj= 0°C - 12°C, C1=0.33uF, Co=0.1uF, unless otherwise specified)(Note 1)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	Vo	Tj=25°C, Io=5mA - 1.0A	23.04	24.0	24.96	V
		VI =27V to 38V,Io=5mA - 1.0A	22.80		25.20	V
Load Regulation	ΔV_o	Tj=25°C,Io=5mA - 1.5A			240	mV
		Tj=25°C,Io=0.25A - 0.75A			120	mV
Line regulation	ΔV_o	VI =27V to 38V,Tj=25°C			240	mV
		VI =27V to 38V,Tj=25°C,Io=1A			240	mV
Quiescent Current	Iq	Tj=25°C, Io=<1A			8.0	mA
Quiescent Current Change	ΔI_q	VI =28V to 38V			1.0	mA
	ΔI_q	Io=5mA - 1.0A			0.5	mA
Output Noise Voltage	VN	10Hz<=f<=100kHz		170		μ V
Temperature coefficient of Vo	$\Delta V_o/\Delta T$	Io=5mA		-2.8		$mV/^{\circ}C$
Ripple Rejection	RR	VI =28V - 38V,f=120Hz,Tj=25°C	50	66		dB
Peak Output Current	IPK	Tj=25°C		1.8		A
Short-Circuit Current	Isc	VI=35V, Tj=25°C		250		mA
Dropout Voltage	Vd	Tj=25°C		2.0		V

Note 1: The Maximum steady state usable output current are dependent on input voltage, heat sinking, lead length of the package and copper pattern of PCB. The data above represents pulse test conditions with junction temperatures specified at the initiation of test.

Note 2: Power dissipation<0.5W

TO-220AB PACKAGE OUTLINE DIMENSIONS

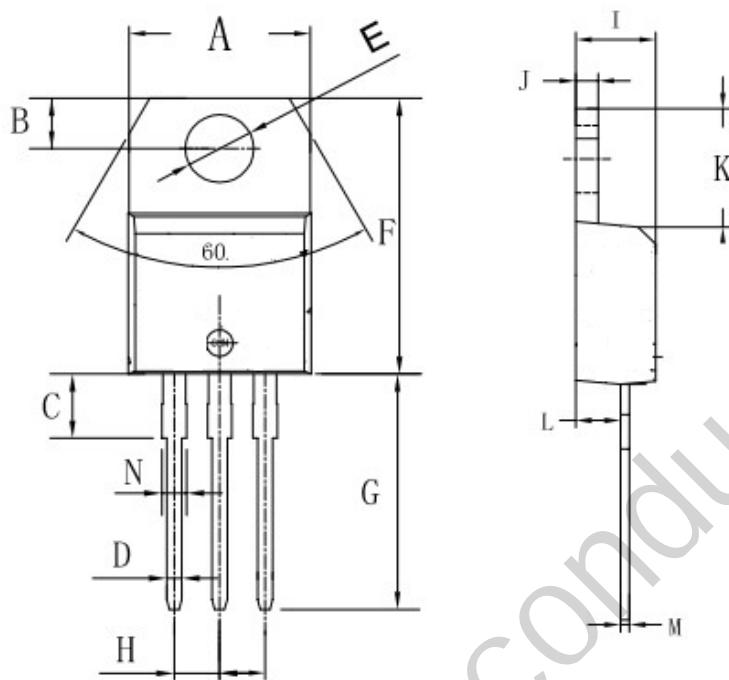

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	9.8	10.4	0.385	0.409
B	2.65	3.1	0.104	0.122
C	2.8	4.2	0.110	0.165
D	0.7	0.92	0.027	0.036
E	3.75	3.95	0.147	0.155
F	14.8	16.1	0.582	0.633
G	13.05	13.6	0.513	0.535
H	2.4	2.7	0.094	0.106
I	4.38	4.61	0.172	0.181
J	1.15	1.36	0.045	0.053
K	5.85	6.82	0.230	0.268
L	2.35	2.75	0.092	0.108
M	0.35	0.65	0.013	0.025
N	1.18	1.42	0.046	0.055

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [JSMSEMI](#) manufacturer:

Other Similar products are found below :

[LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [714954EB](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L79M05T-E](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [ZTS6538SE](#) [UA78L09CLP](#) [UA78L09CLPR](#) [CAT6221-PPTD-GT3](#) [MC78M09CDTRK](#) [NCV51190MNTAG](#) [78M05](#) [HT7150-1](#) [UM1540DB-18](#) [XC6234H281VR-G](#) [WL2834CA-6/TR](#) [TPL730F33-5TR](#) [TLS850F1TA V50](#) [TPS549B22RVFR](#) [UM1540DB-33](#) [WL9200P3-50B](#) [WL9100P3-33B](#) [WL9005D4-33](#) [XC6219B152MR](#) [WL2855K33-3/TR](#) [PJ54BM33SE](#) [PJ9500M25SA](#) [MD7218E33PC1](#) [H7533-2PR](#) [SK7812AU](#) [SD1A30](#) [78L33](#) [TP78L33T3](#) [L78L33ACUTR](#) [SK6513ST3A-50](#) [SK6054D4-09](#) [SK6054D4-18](#) [SK6054D4-11](#) [SK6054D4-10](#) [LM79L12F](#)