


MSA *TERMINAL*

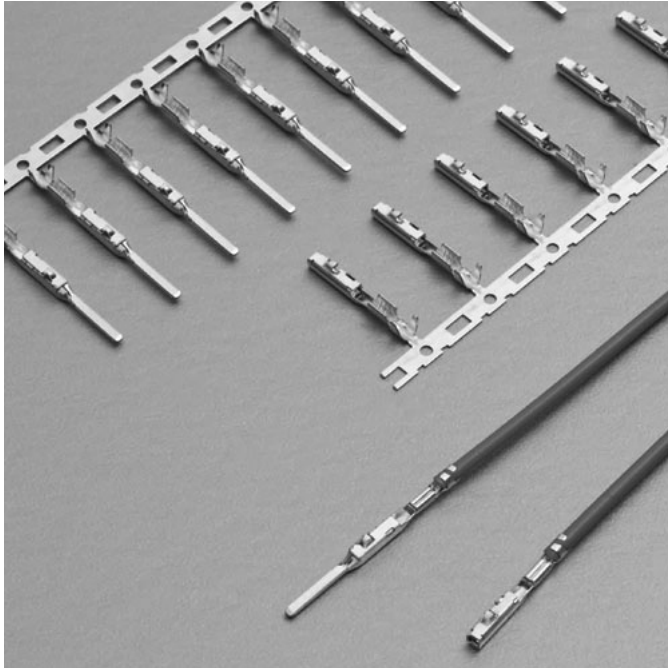

1.2 mm terminal compliant with USCAR standards.

Features


● Terminal Concept

One-piece structure, overlapped box design, four contact points.

● Variations

Varieties of platings and barrel sizes are available.

● Housing Lance Type

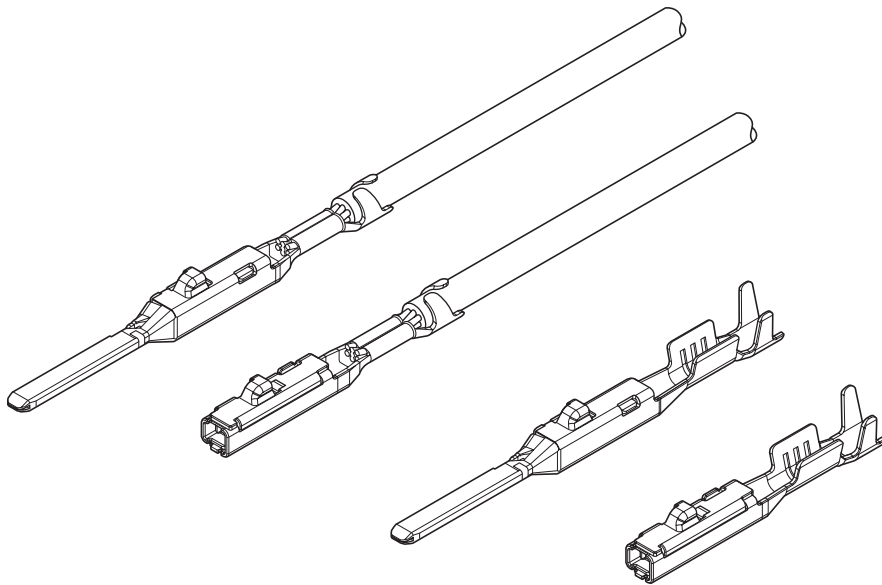


Specifications

- Terminal size: 1.2 mm (t=0.6 mm)
- Applicable wire: 0.13 mm² to 1.5 mm²
- Finish: Tin-plated
Silver-plated


- * Compliant with ELV/RoHS.
- * Contact JST for details.

Female terminal

SSS/SS barrel

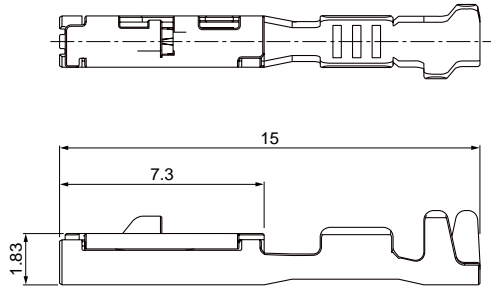


S/M barrel

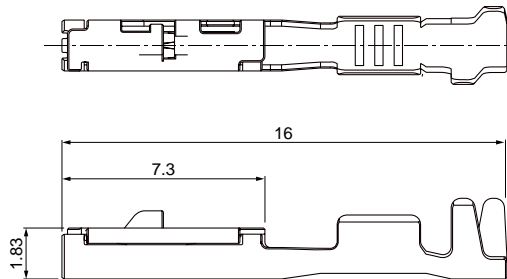


Male terminal

SSS/SS barrel

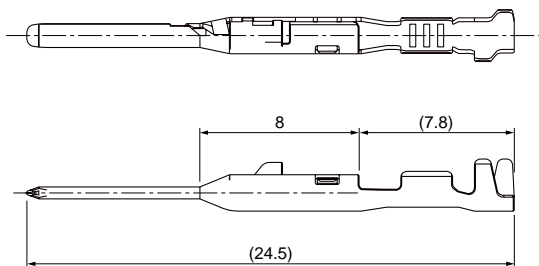

S/M barrel

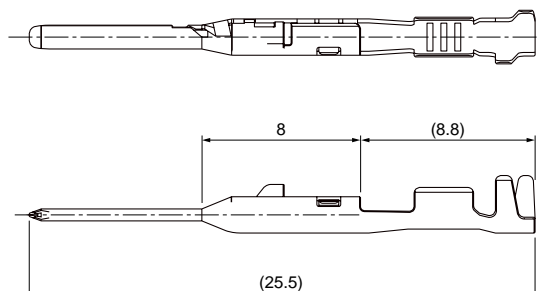

Tin-plated

Size	Model No.	Applicable wire range		Q'ty/reel
		Conductor (mm ²)	Insulation O.D. (mm)	
SSS	SMSA-A001T-M1.2	0.13	0.95 to 1.05	9,000
SS	SMSA-A011T-M1.2	0.22 to 0.35	1.2 to 1.4	9,000
S	SMSA-A031T-M1.2	0.5 to 0.75	1.6 to 1.9	8,500
M	SMSA-A041T-M1.2	1.0 to 1.5	2.1 to 2.4	6,000

Material and Finish

Copper alloy, tin-plated (reflow treatment)

Silver-plated

Size	Model No.	Applicable wire range		Q'ty/reel
		Conductor (mm ²)	Insulation O.D. (mm)	
SSS	SMSA-A001A-M1.2	0.13	0.95 to 1.05	9,000
SS	SMSA-A011A-M1.2	0.22 to 0.35	1.2 to 1.4	9,000
S	SMSA-A031A-M1.2	0.5 to 0.75	1.6 to 1.9	8,500
M	SMSA-A041A-M1.2	1.0 to 1.5	2.1 to 2.4	6,000

Material and Finish

Copper alloy, nickel-undercoated, Contact area; silver-plated
Barrel area; tin-plated

Tin-plated

Size	Model No.	Applicable wire range		Q'ty/reel
		Conductor (mm ²)	Insulation O.D. (mm)	
SSS	SMSAW-A001T-M1.2	0.13	0.95 to 1.05	10,000
SS	SMSAW-A011T-M1.2	0.22 to 0.35	1.2 to 1.4	9,000
S	SMSAW-A031T-M1.2	0.5 to 0.75	1.6 to 1.9	9,000
M	SMSAW-A041T-M1.2	1.0 to 1.5	2.1 to 2.4	6,000

Material and Finish

Copper alloy, tin-plated (reflow treatment)

Silver-plated

Size	Model No.	Applicable wire range		Q'ty/reel
		Conductor (mm ²)	Insulation O.D. (mm)	
SSS	SMSAW-A001A-M1.2	0.13	0.95 to 1.05	10,000
SS	SMSAW-A011A-M1.2	0.22 to 0.35	1.2 to 1.4	9,000
S	SMSAW-A031A-M1.2	0.5 to 0.75	1.6 to 1.9	9,000
M	SMSAW-A041A-M1.2	1.0 to 1.5	2.1 to 2.4	6,000

Material and Finish

Copper alloy, nickel-undercoated, Contact area; silver-plated
Barrel area; tin-plated

Crimping machine, Applicator

Strip terminal	Crimping machine	Crimp applicator MKS-L	
		Dies	Crimp applicator with dies
SMSA-A001()-M1.2	AP-K2N	MK/SMSA-A001-12	APLMK SMSA-A001-12
SMSA-A011()-M1.2		MK/SMSA-A011-12	APLMK SMSA-A011-12
SMSA-A031()-M1.2		MK/SMSA-A031-12	APLMK SMSA-A031-12
SMSA-A041()-M1.2		MK/SMSA-A041-12	APLMK SMSA-A041-12
SMSAW-A001()-M1.2		MK/SMSAW-A001-12	APLMK SMSAW-A001-12
SMSAW-A011()-M1.2		MK/SMSAW-A011-12	APLMK SMSAW-A011-12
SMSAW-A031()-M1.2		MK/SMSAW-A031-12	APLMK SMSAW-A031-12
SMSAW-A041()-M1.2		MK/SMSAW-A041-12	APLMK SMSAW-A041-12

Note: When crimping operation is conducted using an applicator and die set other than the above, JST cannot guarantee the performance of the terminal.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Connectors](#) category:

Click to view products by [JST](#) manufacturer:

Other Similar products are found below :

[003-018-000](#) [60403001](#) [60993906-B](#) [M902-2131](#) [M902-2161](#) [M902-2344](#) [72.330.1035.1](#) [73.353.4028.0](#) [F119300-B](#) [F166900](#) [F258300-B](#)
[F358300-B](#) [F407400](#) [F444110](#) [F487000](#) [F509500B-B](#) [827153-1](#) [8N1515-32-24P](#) [9-1326729-8](#) [925474-1](#) [928905-1](#) [964562-4](#) [968782-1](#)
[GT17SA-8DS-HU](#) [98891-1012](#) [98947-1016](#) [12004147](#) [12004475-L](#) [12010290](#) [12015454](#) [12020219-B](#) [12041318-B](#) [12052225-L](#) [12052466](#)
[12064869](#) [12004327-B](#) [12015308](#) [12015384](#) [12015909](#) [1-21030-1](#) [12041254](#) [12041318](#) [12047946-B](#) [12047957](#) [12047957-L](#) [12059473](#)
[12066261](#) [12110546](#) [12110546-B](#) [12131792](#)