




JWPF CONNECTOR

2.0mm pitch/Crimp style wire-to-wire connectors

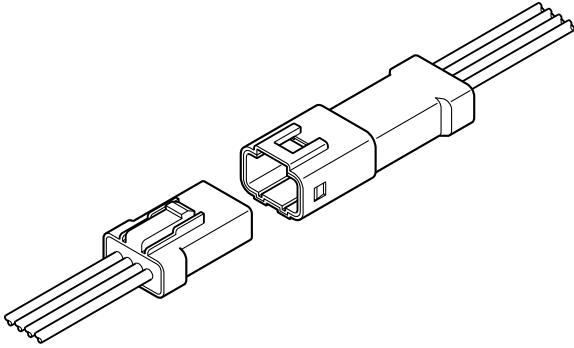

Applicable for waterproof usage. This is the wire-to-wire connector that is grade 7 ingress protection of JIS C 0920 (IEC 60529 IPX7).

- Waterproof grade
- Contained seal ring
- Solid rubber seal
- Double-spring construction
- Housing-to-terminal locks
- Inner-housing lock

Specifications

- Current rating: 3A AC, DC (AWG #22)
- Voltage rating: 100V AC, DC
- Temperature range: -55°C to +85°C
(including temperature rise in applying electrical current)
- Contact resistance: Initial value/ 10m Ω max.
After environmental testing/ 15m Ω max.
- Insulation resistance: 1,000M Ω min.
- Withstanding voltage: 1,000V AC/minute
- Applicable wire: AWG #26 to #22
0.13 to 0.33mm²
Insulation O.D./ 1.4 to 1.7mm
- Waterproof grade: Grade 7 ingress protection of JIS C 0920(IEC 60529 IPX7)


* Compliant with RoHS.

* Refer to "General Instruction and Notice when using Terminals and Connectors" at the end of this catalog.

* Contact JST for details.


Standards

Recognized E60389

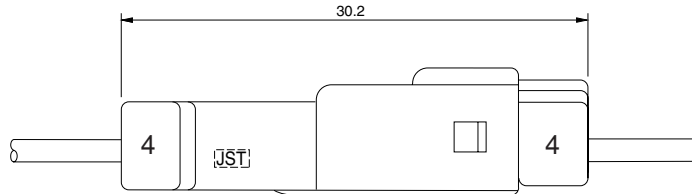


Contact

Tab contact

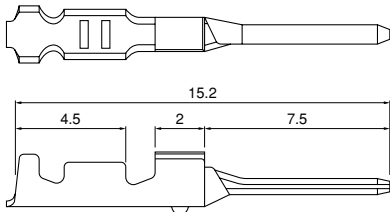

Receptacle contact



Model No.		Applicable wire		Insulation O.D. (mm)	Q'ty / reel
Tab contact	Receptacle contact	mm ²	AWG #		
SWPT-001T-P025	SWPR-001T-P025	0.13~0.33	26~22	1.4~1.7	8,200

Material and Finish

Tab contact: Phosphor bronze, tin-plated (reflow treatment)
Receptacle contact: Copper alloy, tin-plated (reflow treatment)

RoHS compliance

Note: Contact JST for brass products.

Contact	Crimping machine	Applicator		
		Crimp applicator	Dies	Crimp applicator with dies
SWPT-001T-P025	AP-K2N	MKS-L	MK/SWPR/T-001-025	APLMK SWPR/T001-025
SWPR-001T-P025		-	-	-

JWPF CONNECTOR

Housing

Material: PBT, UL94V-0, natural (white)

Circuits	Tab housing (for Tab contact)		Receptacle housing (for Receptacle contact)	
2	02T-JWPF-VSLE-S 	Q'ty / bag 1,000	02R-JWPF-VSLE-S 	Q'ty / bag 1,000
3	03T-JWPF-VSLE-S 	Q'ty / bag 1,000	03R-JWPF-VSLE-S 	Q'ty / bag 1,000
4	04T-JWPF-VSLE-S 	Q'ty / bag 1,000	04R-JWPF-VSLE-S 	Q'ty / bag 1,000
6	06T-JWPF-VSLE-D 	Q'ty / bag 1,000	06R-JWPF-VSLE-D 	Q'ty / bag 1,000
8	08T-JWPF-VSLE-D 	Q'ty / bag 1,000	08R-JWPF-VSLE-D 	Q'ty / bag 1,000

RoHS compliance

- Note: 1. Receptacle housing comes with seal rubber plate.
 2. Tab housing comes with seal rubber plate, seal ring and seal ring holder.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [JST](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [707-5028](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#)