




DBF301 THRU DBF310 SURFACE MOUNT BRIDGE RECTIFIERS

Features

- Glass Passivated Die Construction
- Low leakage
- Ideal for printed circuit board
- Surge overload rating-110A peak
- Designed for Surface Mount Application
- Plastic Material-UL Flammability 94V-0

Mechanical Data

- Case: DBF, molded plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: As Marked on Case
- Mounting Position: Any
- Marking: Type Number

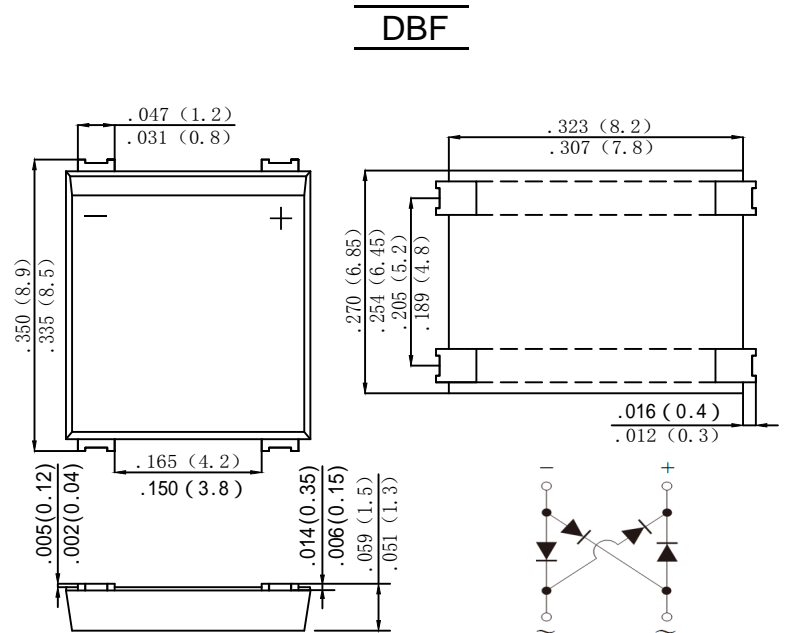

dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.
Single Phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER (Note 1)	SYMBOL	DBF301	DBF302	DBF304	DBF306	DBF308	DBF310	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}							
Working Peak Reverse Voltage	V_{RWM}	100	200	400	600	800	1000	V
DC Blocking Voltage	V_{DC}							
RMS Reverse Voltage	V_{RMS}	70	140	280	420	560	700	V
Average Rectified Output Current (Note 2) @ $T_C=120^\circ\text{C}$	IF(AV)	3.0						A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	110						A
I^2t Rating for Fusing ($t < 8.3\text{ms}$)	I^2t	50.215						A^2s
Forward Voltage per element @ $I_F=1.5\text{A}$ @ $I_F=3.0\text{A}$	V_{FM}	0.95 1.0						V
Peak Reverse Current @ $T_A=25^\circ\text{C}$ At Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$	I_R	5.0 500						μA
Typical Junction Capacitance per leg (Note 3)	C_J	45						pF
Typical Thermal Resistance per leg (Note 4)	$R_{\theta JA}$	15						$^\circ\text{C}/\text{W}$
	$R_{\theta JC}$	5						
Operating and Storage Temperature Range	T_J, T_{STG}	-55to+150						$^\circ\text{C}$

- Note: 1. Mounted on glass epoxy PC board with 1.3mm² solder pad.
2. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.
3. Mounted on 15 mm*12 mm*1.6mm AL pad attach 195 mm*110 mm*10 mm steel plate



DBF301 THRU DBF310 SURFACE MOUNT BRIDGE RECTIFIERS

Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)






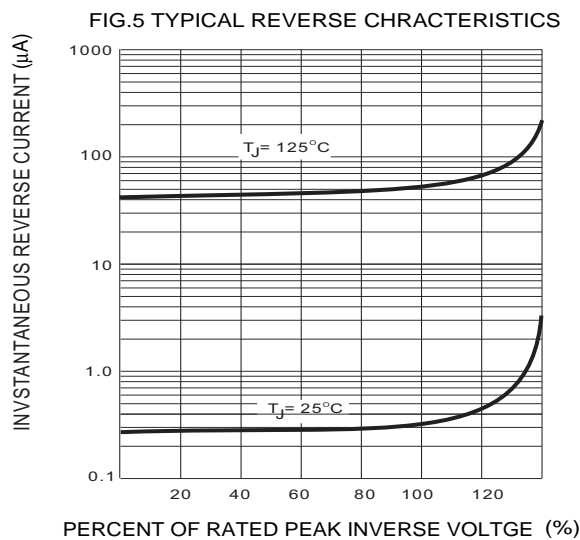


FIG.6 MOUNTING PAD LAYOUT

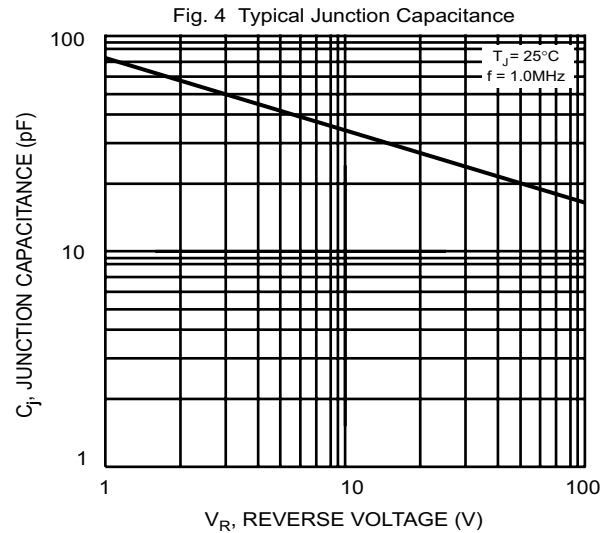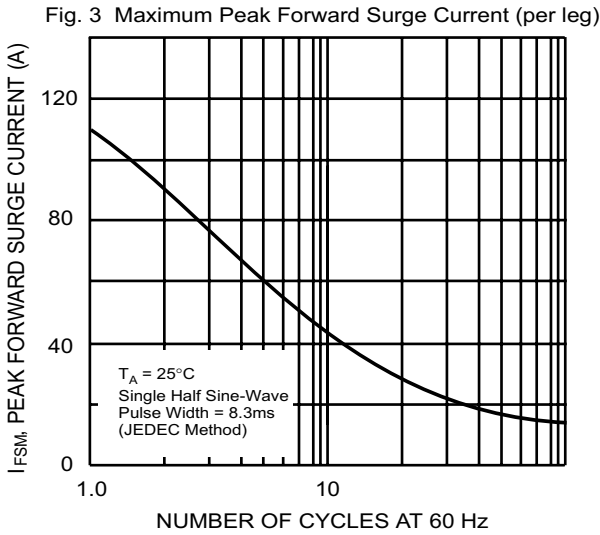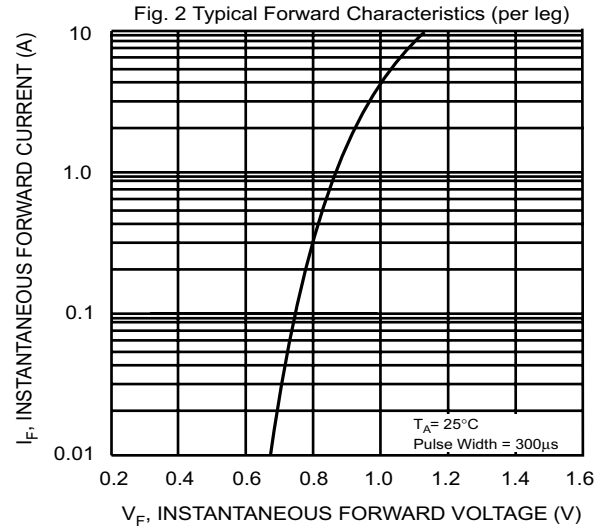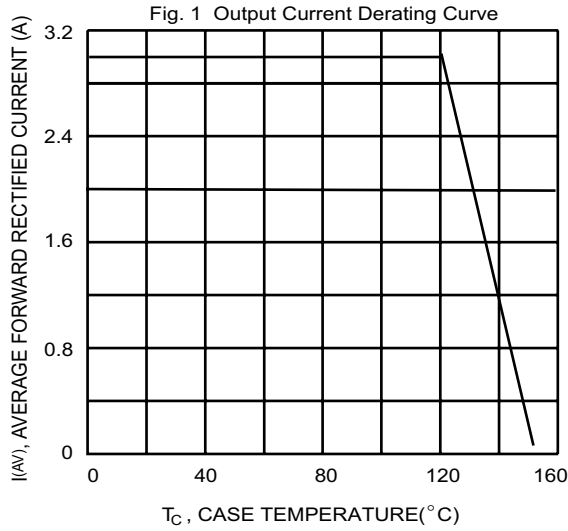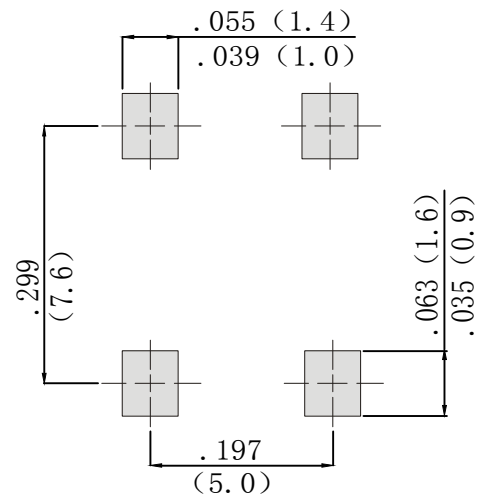

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Juxing Electronic Technology](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#) [DB101-BP](#) [DF01](#)
[DF10SA-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [KBPC50-10S](#) [RS405GL-BP](#) [GBJ1502-BP](#) [GBU6M](#) [GSIB1520-E3/45](#) [36MB140A](#) [TB102M](#)
[MB1510](#) [MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#) [MP5010W-BP](#) [MP501W-BP](#) [MP502-BP](#) [BR84DTP204](#) [BU1508-E3/51](#) [KBPC25-02](#)
[VS-110MT120KPBF](#) [VS-2KBB60](#) [VS-60MT120KPBF](#) [VS-60MT80KPBF](#) [DB105-BP](#) [DF1510S](#) [VS-40MT160PAPBF](#) [VISKBU8K-E4/51](#)
[36MT100](#) [GBU4G-BP](#) [GBU6B-E3/51](#) [DF15005S-E3/77](#) [GSIB15A80-E3/45](#) [DB104-BP](#) [D3SB60](#) [TB354](#)