



Features

- Programmable output voltage to 36V.
- Low dynamic output impedance.
- Sink current capability of 1.0 to 100mA.
- Low output noise voltage
- Fast turn on response

Application

- It provides very wide applications, including shunt regulator, series regulator, switching regulator, voltage reference and others.

SOT-23



Marking: 431A

Absolute Maximum Ratings (Ta=25°C unless otherwise specified)

Symbol	Parameter	Rating	Units
V_{KA}	Cathode Voltage	37	V
I_{KA}	Cathode Current Range(Continuous)	-100 ~ +150	mA
I_{REF}	Reference Input Current Range	-0.05 ~ +10	mA
P_D	Power Dissipation	350	mW
T_J	Operating Junction	+150	°C
T_{OPR}	Operating Ambient	0 ~ 70	°C
T_{STG}	Storage Temperature	-65 ~ +150	°C

Recommended Operating Conditions







Symbol	Parameter	Min.	Typ.	Max.	Units
V_{KA}	Cathode Voltage	V_{REF}	-	36	V
I_{KA}	Cathode Current	1	-	100	mA

Electrical Characteristics


(Ta=25°C unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_{REF}	Reference Input Voltage	TL431(1%)	2.47	2.495	2.52	V
		TL431A(0.5%)	2.483	2.495	2.507	V
		TL431B(0.4%)	2.485	2.495	2.505	V
ΔV_{REF}	Deviation of Reference Input Voltage Over Temperature	$V_{KA}=V_{REF}, I_{KA}=10mA,$ $0^\circ C \leq T_A \leq 70^\circ C$		4.5	17	mV
$\frac{\Delta V_{REF}}{\Delta V_{KA}}$	Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage	$I_{KA}=10mA$		-1.0	-2.7	mV/V
				-0.5	-2.0	mV/V
I_{REF}	Reference Input Current	$I_{KA}=10mA, R1=10k\Omega, R2=\infty$		0.7	4	μA
ΔI_{REF}	Deviation of Reference Input Current Over Full Temperature Range	$I_{KA}=10mA, R1=10k\Omega, R2=\infty$		0.4	1.2	μA
$I_{KA(MIN)}$	Minimum Cathode Current for Regulation	$V_{KA}=V_{REF}$		0.45	1	mA
$I_{KA(OFF)}$	Off-State Cathode Current	$V_{KA}=36V, V_{REF}=0$		0.17	1.0	μA
Z_{KA}	Dynamic Impedance	$V_{KA}=V_{REF}, I_{KA}=1\sim 100mA, f \leq 1.0kHz$		0.27	0.5	Ω


Typical Characteristic Curves

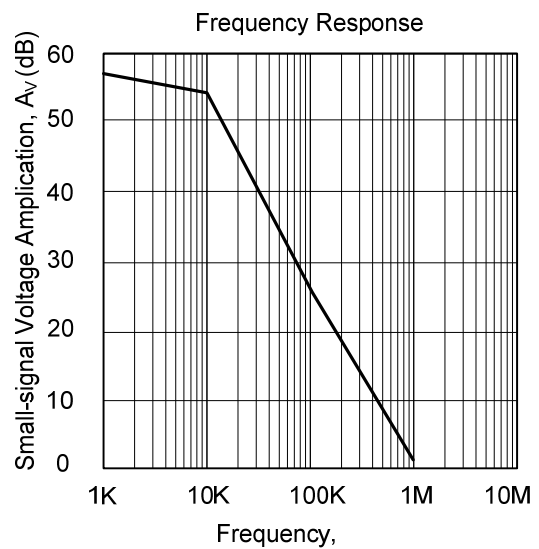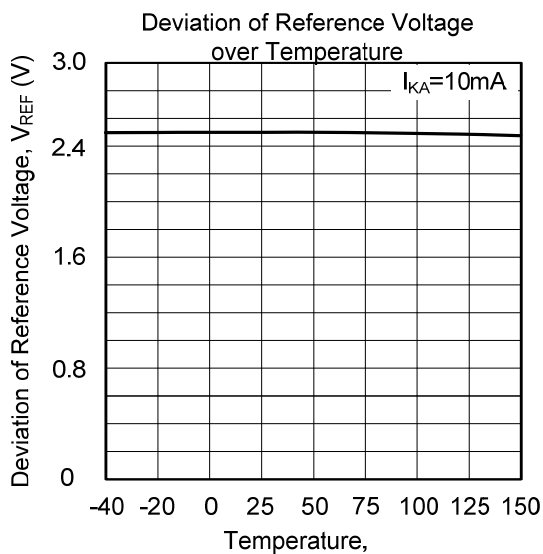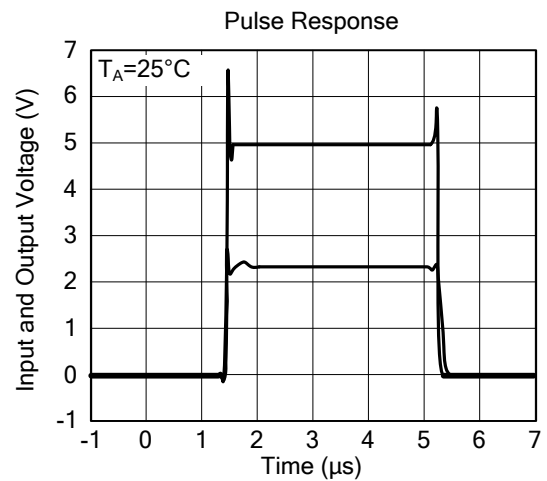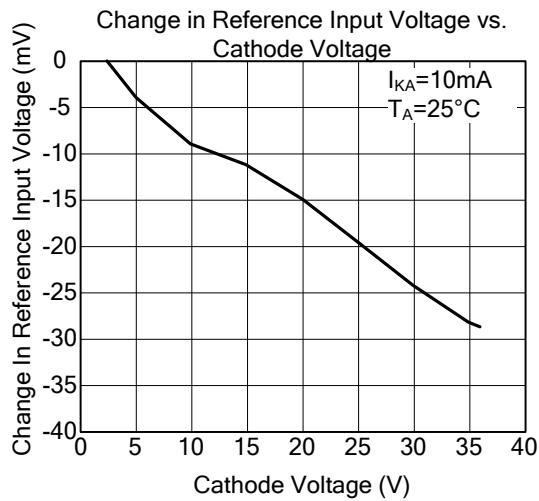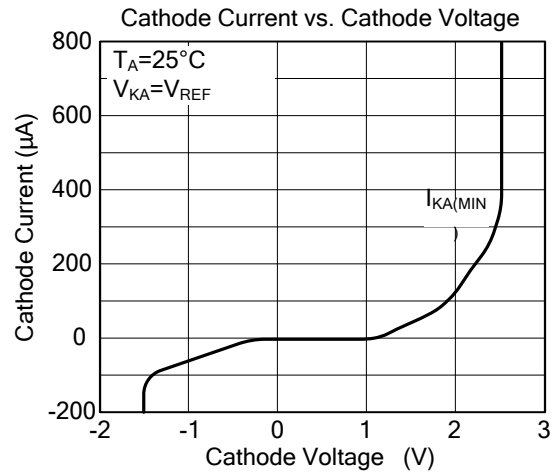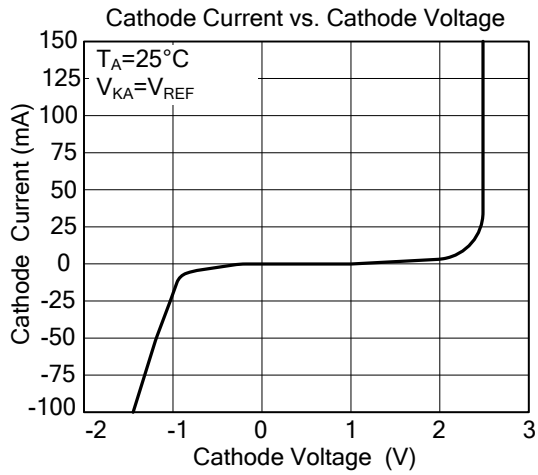

Package Outline SOT-23

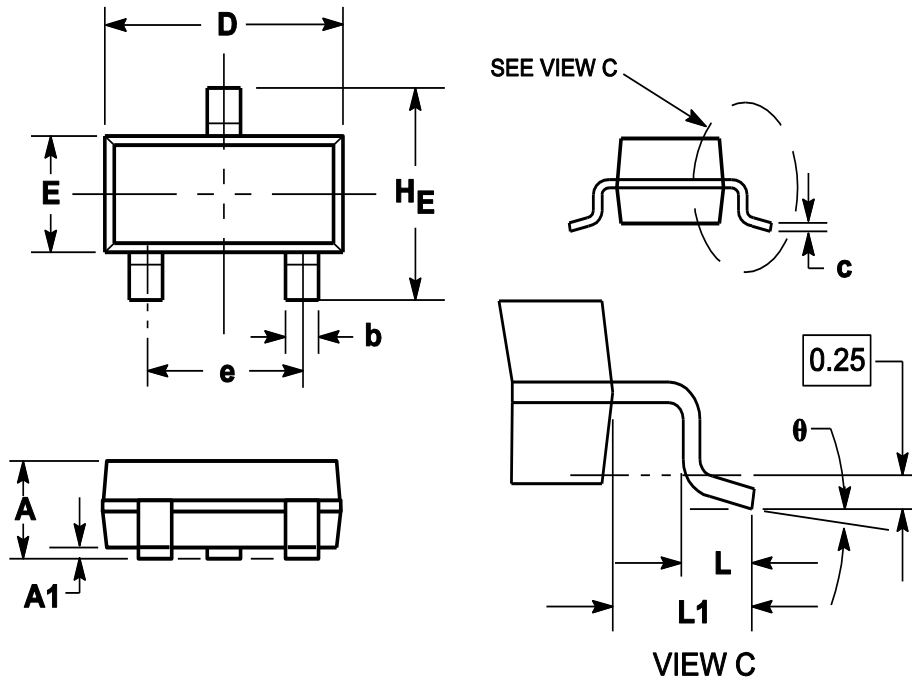

Symbol	Dimensions in millimeter		
	Min.	Typ.	Max.
A	0.900	1.025	1.150
A1	0.000	0.050	0.100
b	0.300	0.400	0.500
c	0.080	0.115	0.150
D	2.800	2.900	3.000
E	1.200	1.300	1.400
HE	2.250	2.400	2.550
e	1.800	1.900	2.000
L1	0.550REF		
L	0.300		0.500
θ	0°		8°

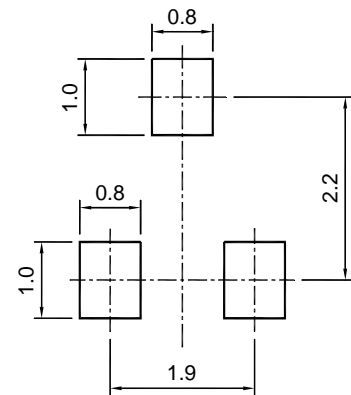

SOT-23

Recommended soldering pad

Ordering Information

Device	Package	Shipping
TL431/A/B-YK	SOT-23	3000PCS/Reel&Tape

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Voltage References](#) category:

Click to view products by [Juxing Electronic Technology](#) manufacturer:

Other Similar products are found below :

[5962-8686103XC](#) [REF01J/883](#) [SC431ILPRAG](#) [AP432AQG-7](#) [LM4040B25QFTA](#) [EL5226IR](#) [EL5326IR](#) [EL5326IRZ](#) [ISL21007DFB825Z](#)
[ISL21009BFB812Z](#) [ISL21009CFB812Z](#) [ISL60002BIH312](#) [TS3320AMR](#) [TS3325AMR](#) [TS3330AMR](#) [TS3333AMR](#) [X60003CIG3-41](#)
[X60003DIG3Z-41T1](#) [X60250V8I](#) [REF3025TB-GT3](#) [SC432BVSNT1G](#) [TL431CPG](#) [LM336Z-5.0](#) [MMTL432](#) [TL431A](#) [LR432ATLT1G](#)
[TL432](#) [TL431A](#) [TL431NSG-AE2-R](#) [TL432](#) [TL431](#) [TL431](#) [CD431A](#) [TL432](#) [LM285M3-2.5/TR](#) [TL432AIM3/TR](#) [LM431AIM3/TR](#)
[MC1403MM/TR](#) [TL431CM3/TR](#) [HT432ARTZ](#) [TL431Z-AST](#) [LTL431APKLT1G](#) [TL4050B25QDBZR](#) [TL431ACZ](#) [KA431SLMF2TF](#)
[KA431SMF2TF](#) [KA431SMFTF](#) [LM4041C12ILPR](#) [LM4050AIM3X-5.0/NOPB](#) [LM4120AIM5-2.5/NOP](#)