

## 特点 Features

标准的 5.0 x 3.2 x 1.0 mm 陶瓷封装表面贴装形式  
小公差及高稳定性

适应自动装配的12MM宽度的编带包装

包装：每卷1000PCS

Typical 5.0 x 3.2 x 1.0 mm Ceramic SMD package

Tight tolerance and Stability

12mm width Tape & Reel package for automatic assembly

Packing: Tape & Reel, 1000 pcs per Reel



## 标准规格 Electronic Specification

型号 Type	SMD5032	
频率范围 Frequency Range	8,000 ~ 54,000MHz	40,000 ~ 100,000MHz
振荡模式 Oscillator Mode	Fund(AT cut)	3rd overtone (AT cut)
调整频差 Frequency Tolerance(at25°C)	± 10ppm, ± 20ppm, ± 30ppm	
温度频差 Frequency Stability	具体见表2	
工作温度 Operating Temperature Range	-40°C ~ 125°C	
贮存温度 Storage Temperature Range	-55°C ~ 125°C	
负载电容 Load Capacitance	Custom design(8 ~ ∞pF)	
激励电平 Drive Level	100 μW Typical (300 μW max.)	
静态电容 Shunt Capacitance	5pF max.	
老化率 Aging	ΔFF: ± 3PPM/year(max.)	

特殊技术要求可定制

## 等效电阻 Equivalent Series Resistance(E.S.R.)

频率范围 Frequency Range	盒型 Hold Type	振荡模式 Mode	等效电阻 E.S.R.	频率范围 Frequency Range	盒型 Hold Type	振荡模式 Mode	等效电阻 E.S.R.
8,000 ~ 10,999MHz	SMD	AT,Fund	80 Ω Max.	25,000 ~ 54,000MHz	SMD	AT,Fund	30 Ω Max.
11,000 ~ 11,999MHz	SMD	AT,Fund	60 Ω Max.	40,000 ~ 59,999MHz	SMD	AT,3rd	120 Ω Max.
12,000 ~ 24,999MHz	SMD	AT,Fund	40 Ω Max.	60,000 ~ 100,00MHz	SMD	AT,3rd	80 Ω Max.

Table 1


## 温度频差和工作温度范围 Frequency Stability Vs Operating Temperature range

Temp.(°C)\ppm	± 5	± 10	± 15	± 20	± 25	± 30	± 50
-10 to 60°C	△	○	○	○	○	○	○
-20 to 70°C		△	○	○	○	○	○
-40 to 85°C			△	○	○	○	○
-40 to 125°C						△	○

○:可实现的 △:与供应商沟通

Table 2

## 外型尺寸 Outline Dimensions(Unit:mm)

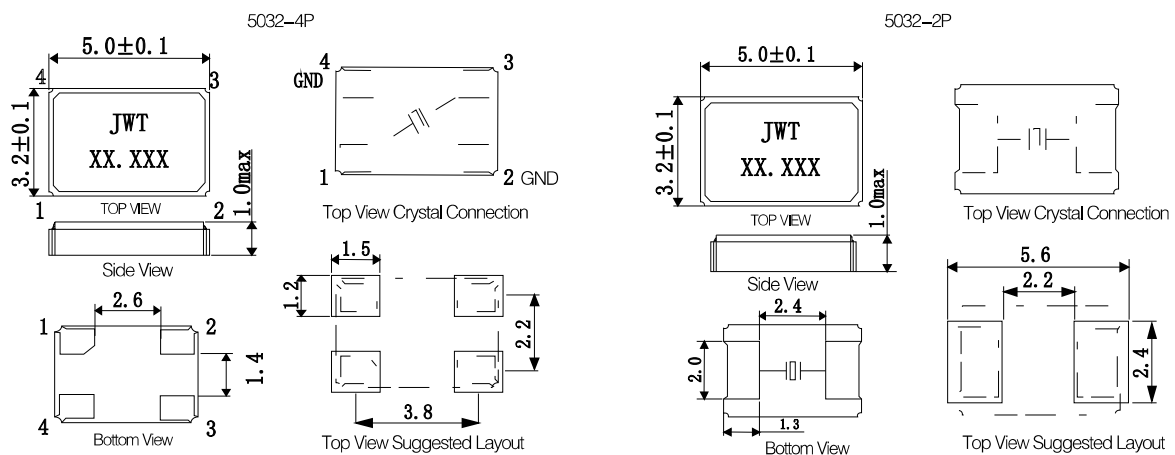

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Resonators](#) category:*

*Click to view products by [JWT](#) manufacturer:*

Other Similar products are found below :

[B39431R820H210](#) [ECS-HFR-40.00-B-TR](#) [CSTLS4M00G53Z-A0](#) [ECS-CR2-16.00-A-TR](#) [ECS-HFR-20.00-B-TR](#) [ECS-CR2-20.00-A-TR](#)  
[RO3164E-3](#) [CSTNE14M7V510000R0](#) [AWSCR-4.19CRLB-C15-T3](#) [AWSCR-4.91CRLB-C15-T3](#) [AWSCR-5.00CPLB-C30-T4](#)  
[CSTNE8M00GH5C060R0](#) [9AC04194152080D2JB](#) [CSTCR4M91G55B-R0](#) [CSTLS3M68G56-B0](#) [FC-12M32.768KHZ9PF20PPM](#)  
[7Y032768NW2](#) [ASR315S2](#) [ASR433.42E-T](#) [146-32.768-12.5-20-20/A](#) [ZTA 3.68MG](#) [X1A000091000500](#) [X1A0000910001](#) [AWSCR-](#)  
[25.00CW-T](#) [AWSZT-12.00MWD-T](#) [ECS-SR1-4.19-B-TR](#) [7C024000HW1](#) [7C012000IW1](#) [7C012000MW1](#) [7C016000HW1](#) [7C016000MW1](#)  
[7C032000IW1](#) [7C016000RW1](#) [7C026000MW1](#) [7C040000HW1](#) [7C012000RW1](#) [7C024000MW1](#) [7C026000HW1](#) [7C024576RW1](#)  
[X201632MKB4SI](#) [7C027000MW1](#) [7E25000E18UCG](#) [7E50000E18UCG](#) [XYCCCLNANF-16.000000MHZ](#) [XYDBPCNANF-12MHZ](#)  
[XYDBBCNANF-16.000000MHZ](#) [XYDBBCNANF-24.000000MHZ](#) [XYHCCLNANF-24.000000MHZ](#) [XYBBCLNANF-26.000000MHZ](#)  
[CM4012M00020T8188026](#)