


KY2301H

-20V P-Channel Mosfet

FEATURES

- $R_{DS(ON)} \leq 110m\Omega$ (76m Ω Typ.)
@ $V_{GS}=-4.5V$
- $R_{DS(ON)} \leq 140m\Omega$ (102m Ω Typ.)
@ $V_{GS}=-2.5V$

SOT-23

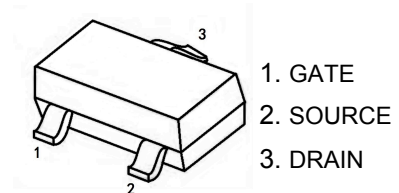


1. GATE
2. SOURCE
3. DRAIN


APPLICATIONS

- Load Switch for Portable
- Devices DC/DC Converter

MARKING



P-CHANNEL MOSFET



MAXIMUM RATINGS ($T_a=25^\circ C$ unless otherwise noted)

Symbol	Parameter	Max.	Units
V_{DSS}	Drain-Source Voltage	-20	V
V_{GSS}	Gate-Source Voltage	± 12	V
I_D	Continuous Drain Current	-3	A
I_{DM}	Pulsed Drain Current ^{note1}	-12	A
P_D	Power Dissipation	0.4	W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient ($t \leq 5s$)	312	$^\circ C/W$
T_J	Junction Temperature	150	$^\circ C$
T_{STG}	Storage Temperature Range	-55 to +150	$^\circ C$

KY2301H

MOSFET ELECTRICAL CHARACTERISTICS Ta=25 °C unless otherwise specified






Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
Off Characteristic						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D = -250\mu A$	-20	-24.5	-	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = -20V, V_{GS} = 0V,$	-	-	-1	μA
I_{GSS}	Gate to Body Leakage Current	$V_{DS} = 0V, V_{GS} = \pm 8V$	-	-	± 100	nA
On Characteristics						
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = -250\mu A$	-0.4	-0.6	-1.0	V
$R_{DS(on)}$	Static Drain-Source on-Resistance <small>note1</small>	$V_{GS} = -4.5V, I_D = -1A$	-	76	110	m Ω
		$V_{GS} = -2.5V, I_D = -1A$	-	102	140	
Dynamic Characteristics <small>note2</small>						
C_{iss}	Input Capacitance	$V_{DS} = -10V, V_{GS} = 0V,$ $f = 1.0MHz$	-	405	-	pF
C_{oss}	Output Capacitance		-	75	-	pF
C_{rss}	Reverse Transfer Capacitance		-	55	-	pF
Q_g	Total Gate Charge	$V_{DS} = -10V, I_D = -3A,$ $V_{GS} = -2.5V$	-	-	6	nC
Q_{gs}	Gate-Source Charge		-	0.7	-	nC
Q_{gd}	Gate-Drain("Miller") Charge		-	1.3	-	nC
Switching Characteristics <small>note2</small>						
$t_{d(on)}$	Turn-on Delay Time	$V_{DD} = -10V, I_D = -1A,$ $R_{GEN} = 1\Omega, V_{GS} = -4.5V$	-	11	20	ns
t_r	Turn-on Rise Time		-	35	60	ns
$t_{d(off)}$	Turn-off Delay Time		-	30	50	ns
t_f	Turn-off Fall Time		-	10	20	ns
Drain-Source Diode Characteristics and Maximum Ratings						
V_{SD}	Drain to Source Diode Forward Voltage	$V_{GS} = 0V, I_S = -0.7A$	-	-0.75	-1.2	V

Notes: 1. Pulse Test: Pulse width $\leq 300\mu s$, Duty Cycle $\leq 2\%$

2. Guaranteed by design, not subject to production testing.


KY2301H

TYPICAL PERFORMANCE CHARACTERISTICS

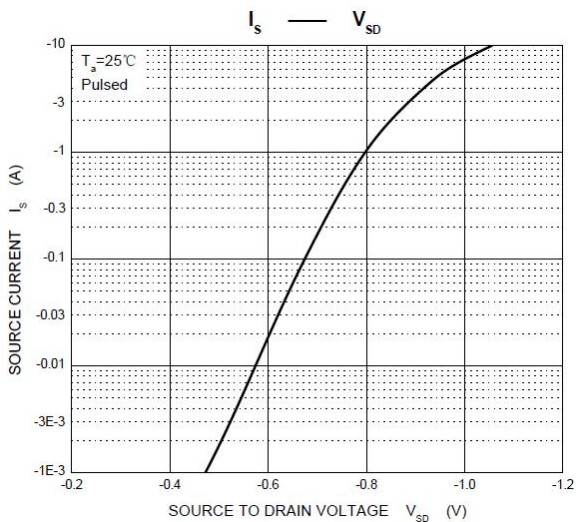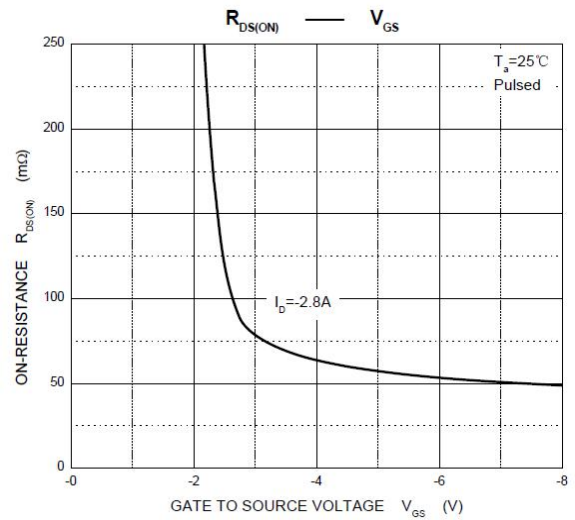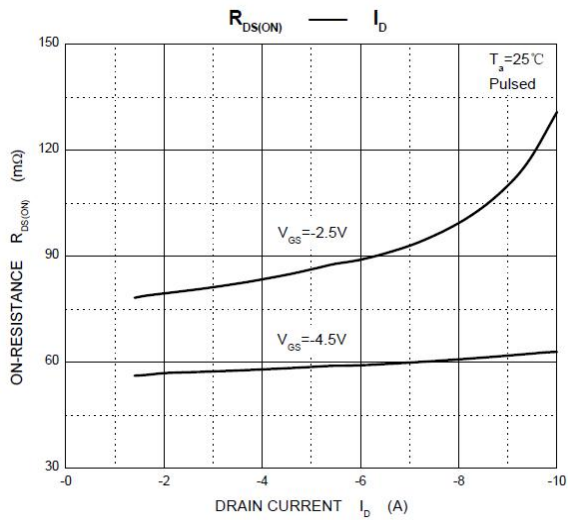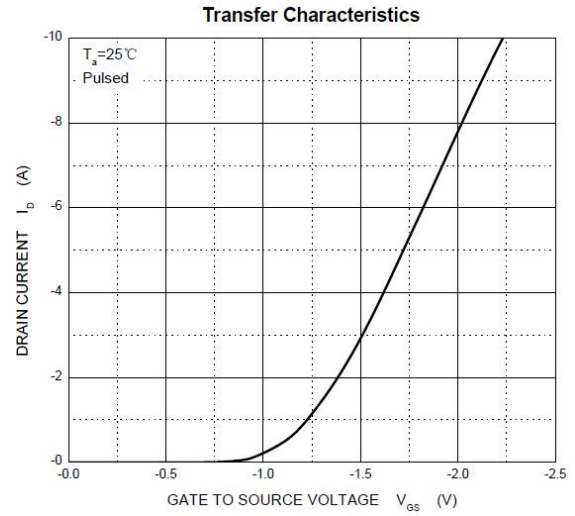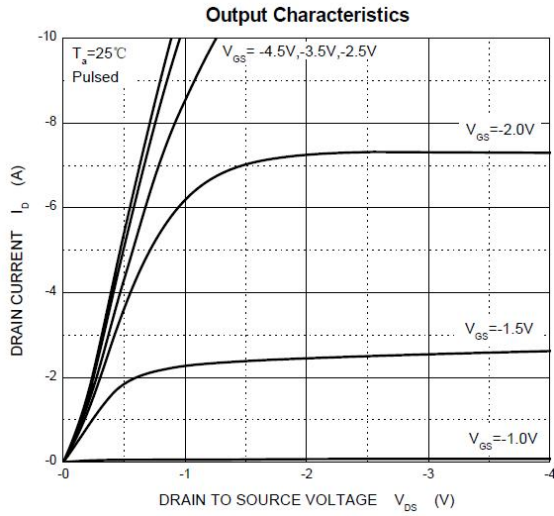

KY2301H

SOT-23 PACKAGE OUTLINE DRAWING

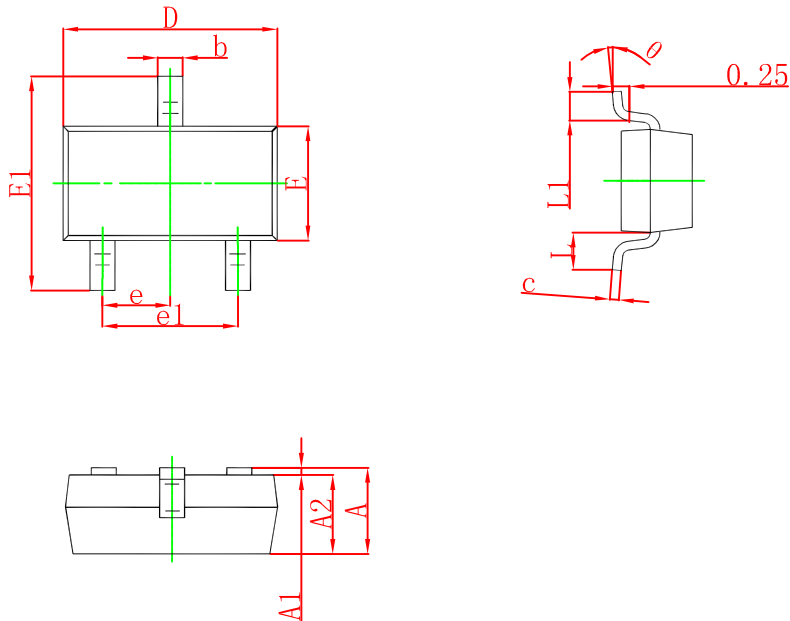

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [Kang Yang](#) manufacturer:

Other Similar products are found below :

[MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [NTNS3A92PZT5G](#) [IRFD120](#) [JANTX2N5237](#) [2N7000](#) [2SK2464-TL-E](#) [AOD464](#) [2SJ277-DL-E](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#) [IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [BSF024N03LT3 G](#) [PSMN4R2-30MLD](#) [TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [IPSA70R950CEAKMA1](#) [IPSA70R2K0CEAKMA1](#) [STU5N65M6](#) [C3M0021120D](#) [DMN6022SSD-13](#)