




MAC97 Series  
1A TRIACs  
4 Quadrants

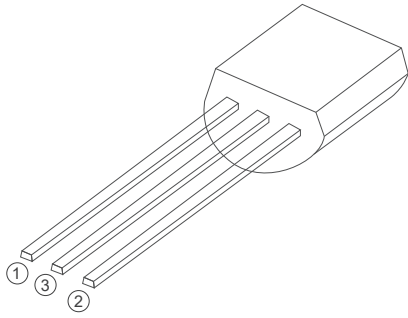


TO-92




SOT-223




SOT-23-3L



SOT-223-2L



SOT-89-2L



## FEATURES

>  $I_T(RMS)$ : 1A    >  $V_{GT}$ : 1.5V    >  $V_{DRM}$   $V_{RRM}$ : 600V and 800V

## APPLICATIONS

Washing machine, vacuums, massager, solid state relay, AC Motor speed regulation and so on.

**Absolute Maximum Ratings** ( $T_J=25^{\circ}\text{C}$  unless otherwise specified)


Symbol	Parameter	Conditions	Ratings	Unit
VDRM VRRM	Repetitive Peak Off-State Voltage	MAC97A6	600/800	V
		MAC97A8		
IT(RMS)	R.M.S On-State Current	$T_c=110^{\circ}\text{C}$	1	A
ITSM	Surge On-State Current	$T_p=10\text{ms}$	12	
$I^2t$	$I^2t$ for fusing	$T_p=10\text{ms}$	0.72	$\text{A}^2\text{s}$
PG(AV)	Average Gate Power Dissipation	$T_J=125^{\circ}\text{C}$	0.3	W
IGM	Peak Gate Current	$t_p=20\mu\text{s}$ $T_J=125^{\circ}\text{C}$	1.2	A
$T_J$	Operating Junction Temperature		$\sim 40\sim 125$	$^{\circ}\text{C}$
TSTG	Storage Temperature		$\sim 40\sim 150$	

**Electrical Characteristics** ( $T_J=25^{\circ}\text{C}$  unless otherwise specified)

Symbol	Parameter	Test Conditions	Value	Unit	
IDRM	Repetitive Peak Off-State Current	$T_J=25^{\circ}\text{C}$	$\leq 10$	$\mu\text{A}$	
		$T_J=110^{\circ}\text{C}$	$\leq 200$	$\mu\text{A}$	
IRRM	Repetitive Peak Reverse Current	$T_J=25^{\circ}\text{C}$	$\leq 10$	$\mu\text{A}$	
		$T_J=110^{\circ}\text{C}$	$\leq 200$	$\mu\text{A}$	
VTM	Forward "on" voltage	$I_T=1.6\text{A}$ $t_p=380\mu\text{s}$	$\leq 1.5$	V	
VGD	Gate non-trigger voltage	$V_D=V_{DRM}$ , $T_J=110^{\circ}\text{C}$	$\geq 0.2$	V	
IH	Holding current	$V_D=12\text{V}$ , $I_{GT}=0.1\text{A}$	I,II,III	$\leq 5$	mA
			IV	$\leq 10$	mA
VGT	Gate trigger voltage	$V_D=12\text{V}$	$\leq 1.2$	V	
IGT	Gate trigger current	$V_D=12\text{V}$	I,II,III	$\leq 3$	mA
			IV	$\leq 7$	mA
di/dt	Critical-rate of rise of commutation current.	$I_T=1\text{A}$ $I_G=0.2\text{A}$ , $dI_G/dt=0.2\text{A}/\mu\text{s}$	I,II,III	$\geq 50$	A / $\mu\text{s}$
			IV	$\geq 10$	A / $\mu\text{s}$
dv/dt	Critical-rate of rise of commutation voltage	$T_J=110^{\circ}\text{C}$ $V_D=2/3V_{DRM}$	$\geq 30$	V/ $\mu\text{s}$	


**FIG1**

Maximum power dissipation versus RMS on-state current

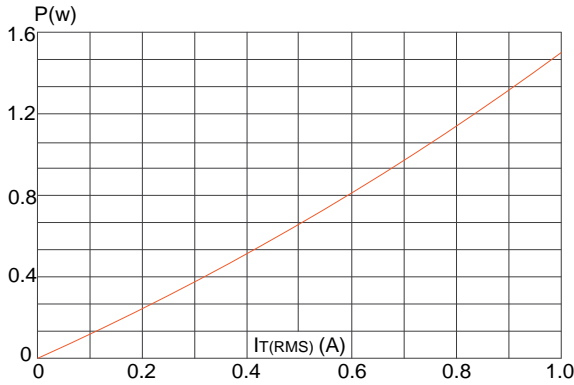


**FIG2**

RMS on-state current versus case temperature

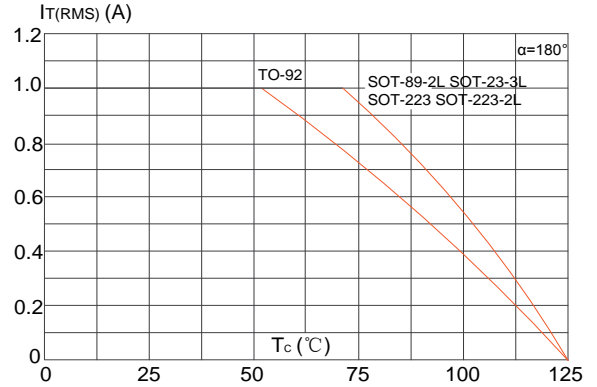


**FIG3**

Surge peak on-state current versus number of cycles

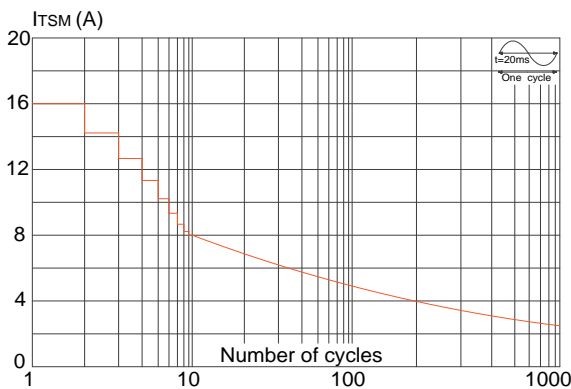


**FIG4**

On-state characteristics (maximum values)

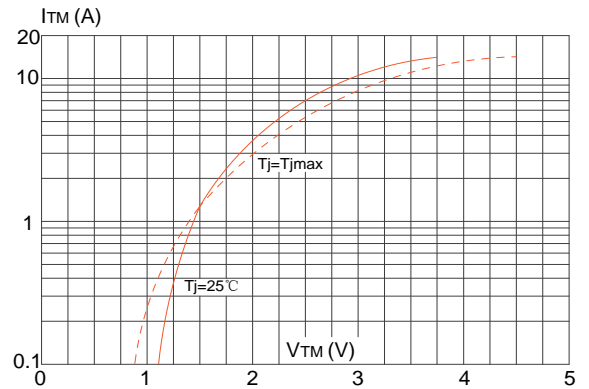


**FIG5**

Non-repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 20ms$ , and corresponding value of  $I^2t$  ( $di/dt < 100A/\mu s$ )

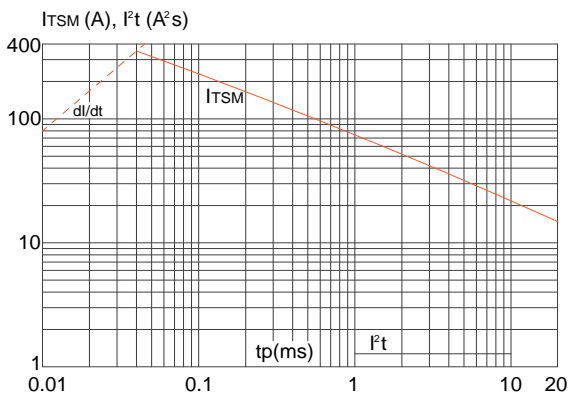


**FIG6**

Relative variations of gate trigger current, holding current and latching current versus junction temperature

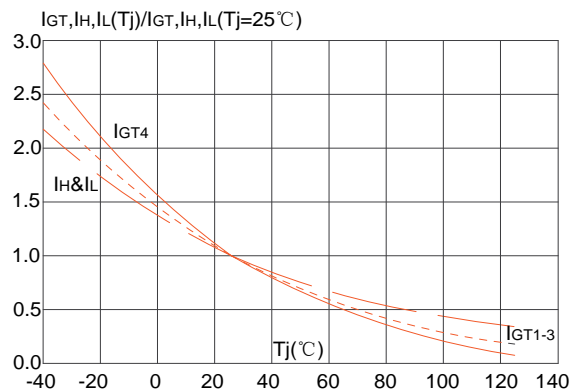


**PACKAGE MECHANICAL DATA**

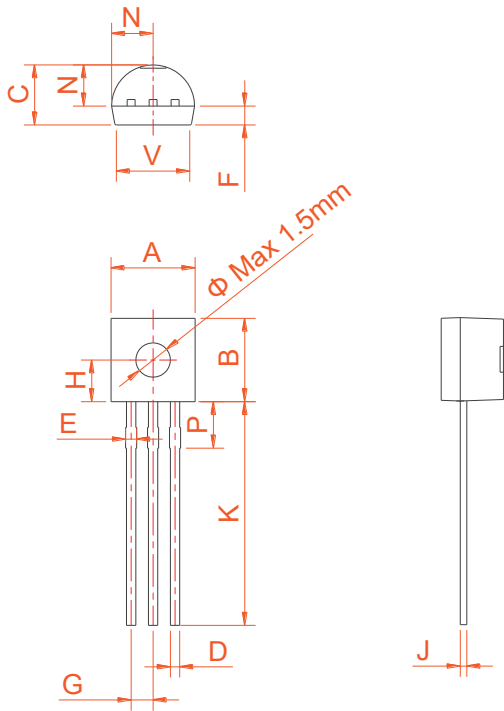

TO-92


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.45		5.20	0.175		0.205
B	4.32		5.33	0.170		0.210
C	3.18		4.19	0.125		0.165
D	0.407		0.533	0.016		0.021
E	0.60		0.80	0.024		0.031
F	-	1.1	-	-	0.043	-
G	-	1.27	-	-	0.050	-
H	-	2.30	-	-	0.091	-
J	0.36		0.50	0.014		0.020
K	12.70		15.0	0.500		0.591
N	2.04		2.66	0.080		0.105
P	1.86		2.06	0.073		0.081
V	-		4.3	-		0.169

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.3	1.4	1.5	0.051	0.055	0.059
A1	0.01	0.06	0.10	0.001	0.002	0.004
B	1.6	1.7	1.8	0.063	0.067	0.071
B1	0.3	0.4	0.5	0.012	0.016	0.020
C	0.22	0.254	0.32	0.009	0.010	0.013
D	4.75	4.95	5.15	0.187	0.195	0.203
E	2.75	2.95	3.15	0.108	0.116	0.124
F		3.0			0.118	
F1		1.5			0.059	
G	0.2	0.3	0.4	0.008	0.012	0.016
H	0.58	0.78	0.98	0.023	0.031	0.039
J	4.3	4.5	4.7	0.169	0.177	0.185
K		0.88			0.035	

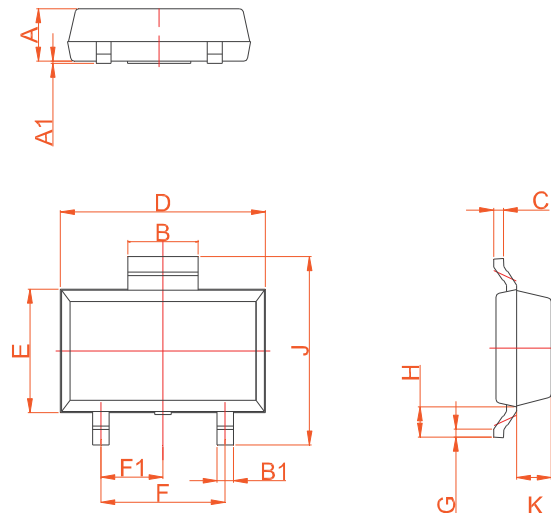

SOT-89-2L


**PACKAGE MECHANICAL DATA**

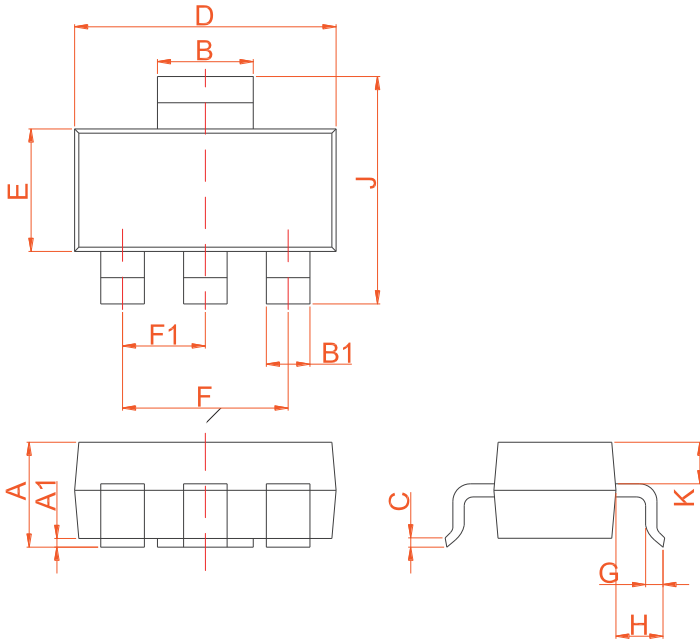

**SOT-223**


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.5	1.6	1.8	0.059	0.063	0.071
A1	0	0.06	0.10	0	0.002	0.004
B	2.9	3.0	3.1	0.114	0.118	0.122
B1	0.6	0.7	0.8	0.024	0.028	0.031
C	0.22	0.26	0.32	0.009	0.010	0.013
D	6.3	6.5	6.7	0.248	0.256	0.264
E	3.3	3.5	3.7	0.130	0.138	0.146
F		4.6			0.181	
F1		2.3			0.091	
G	0.7	0.9	1.1	0.028	0.035	0.043
H	1.5	1.75	2.0	0.059	0.069	0.079
J	6.7	7.0	7.3	0.264	0.276	0.287
K	0.8	0.9	1.0	0.031	0.035	0.039

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.65		2.95	0.104		0.116
B		2.92			0.115	
C		1.90			0.075	
D	0.34		0.36	0.013		0.014
E		1.60			0.063	
F		1.17			0.046	
G		0.15			0.006	
H	0.25		0.55	0.010		0.022

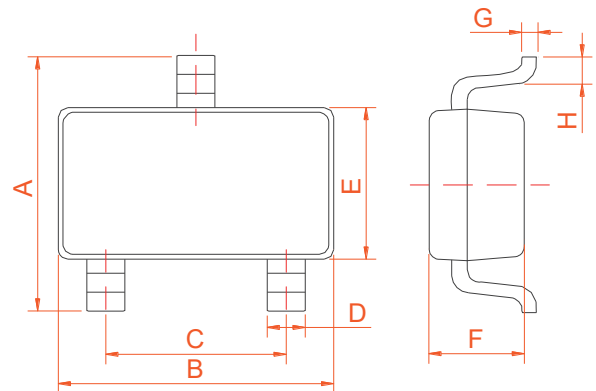

**SOT-23-3L**

**PACKAGE MECHANICAL DATA**

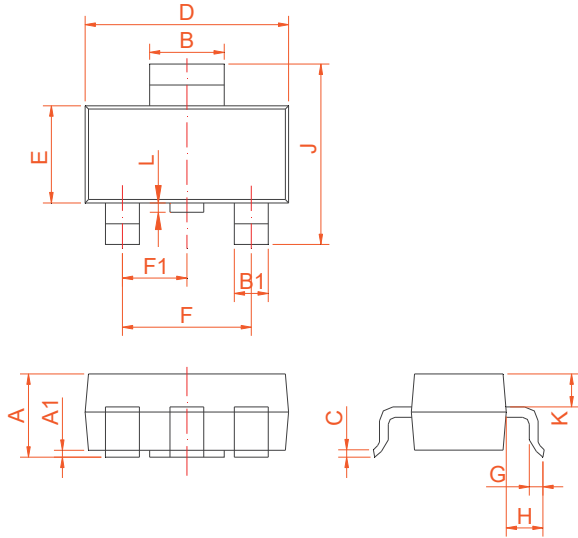

**SOT-223-2L**

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.50	1.60	1.80	0.059	0.063	0.071
A1	0.01	0.06	0.10	0.001	0.002	0.004
B	2.90	3.00	3.10	0.114	0.118	0.122
B1	0.60	0.70	0.80	0.024	0.028	0.031
C	0.22	0.254	0.32	0.009	0.010	0.013
D	6.30	6.50	6.70	0.248	0.256	0.264
E	3.30	3.50	3.70	0.130	0.138	0.146
F		4.60			0.181	
F1		2.30			0.091	
G	0.70	0.90	1.10	0.028	0.035	0.043
H	1.50	1.75	2.00	0.059	0.069	0.079
J	6.70	7.00	7.30	0.264	0.276	0.287
K		0.90			0.035	
L	0	0.10	0.20	0	0.004	0.008

Information furnished is believed to be accurate and reliable. However, Shenzhen HanKingyuan Electronic assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied.

The KY logo is a registered trademark of Shenzhen HanKingyuan Electronic.

©2013 Shenzhen HanKingyuan Electronic - Printed in Shenzhen - All Rights Reserved

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Triacs](#) category:*

*Click to view products by [Kang Yang](#) manufacturer:*

Other Similar products are found below :

[BT137-600-0Q](#) [OT415Q](#) [2N6075A](#) [NTE5688](#) [BTA2008W-800D,135](#) [D31410](#) [QJ8006NH4TP](#) [QJ8010NH5TP](#) [QJ8008NH4TP](#)  
[QJ8006NH4RP](#) [QJ8010RH5TP](#) [QJ8010NH4TP](#) [QJ8006LH4TP](#) [BT136-600,127](#) [BT137B-800,118](#) [BT138-800E,127](#) [BTA140-600,127](#)  
[BTA208-800B,127](#) [BTA225-800B,127](#) [MAC97A6,116](#) [BTA420-800BT,127](#) [BTA201W-800E,115](#) [BTA212B-800B,118](#) [MCR100-8](#) [100-8](#)  
[BT131S](#) [MCR100-6](#) [MCR100-8](#) [BT136S-800E](#) [BT134S-600E](#) [BT151-650R](#) [BT136-800E](#) [BTA12-800B](#) [BT138S-800E](#) [MAC97A8](#)  
[BT137S-800E](#) [BT169-23](#) [BT131-89-2L](#) [MAC97A6-23-3L](#) [BT169-89-2L](#) [BT139-800E](#) [MCR100-8](#) [BT169-MS](#) [MCR100-8](#) [MCR100-6](#)  
[BTA408X-1000C0T,127](#) [ACT108-800EQP](#) [BTA201-800ER,116](#) [T810](#) [2P4M](#) [BT137-600E](#)