


SPECIFICATION OF SURFACE MOUNT TYPE

1. Type	DSX321G
2. Frequency	26 MHz
3. Loading Capacitance	10 pF
4. Drive Level	10 uW +/- 2 uW (200 uW Max.)
5. Frequency Tolerance	+/- 10 ppm at 25 deg.C +/- 3 deg.C
6. Equivalent Series Resistance	40 ohm Max. / CL=Series
7. Temperature Drift	+/- 10 ppm / - 20 deg.C to + 85 deg.C
8. Operating Temp. Range	- 20 deg.C to + 85 deg.C
9. Storage Temp. Range	- 40 deg.C to + 90 deg.C
10. Shunt Capacitance	2.0 pF (Max.)
11. Insulation Resistance	500 Mohm Min. at 100 v DC
12. Aging	+/- 1 ppm Max. / year
13. Mode of Oscillation	AT - cut, Fundamental
14. Dimensions	Refer to Fig-1

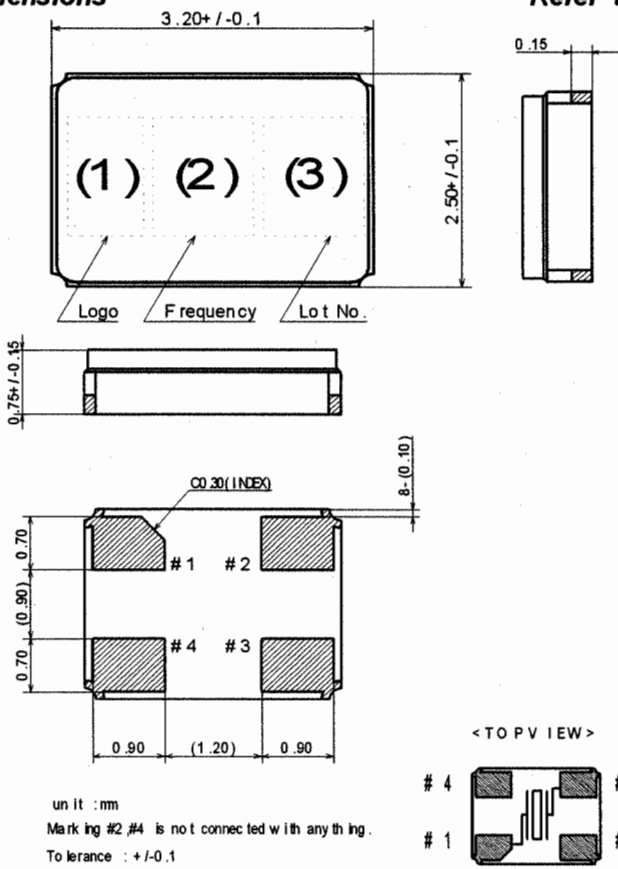

KDS : manufacturer's code

Remarks

(1) Logo and Manufacturing Location

D : Japan

D : Indonesia

(2) Freq. 26

(3) Lot No.

Fig-1

DAISHINKU CORPORATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [KDS](#) manufacturer:

Other Similar products are found below :

[CX3225GB25000M0PPSZ1](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [7A-40.000MAAE-T](#) [FL2000085](#) [99-BU](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [ABC2-6.000MHZ-D4Z-T](#) [ABLS-20.000MHZ-D2-T](#) [ABS071-32.768KHZ-6-T](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [ABL-27.000MHZ-B4Y-T](#) [ABM11-132-24.000MHZ-T3](#) [ABM3B1-25.000MHZ-D2Y-T](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [ABLS-12.000MHZ-B2Y-T](#) [ABLS-10.000MHZ-D3W-T](#) [7A-10.000MBBK-T](#) [SG636PCE-20.000MC](#) [3404](#) [E1SAA18-25.000M TR](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [FL5000014](#) [EUCA18-3.1872M](#) [FX0800015](#) [425F35E027M0000](#)