

DATA SHEET.

DEFINITIVE [ X ]


FILTER CODE: PROVISIONAL [ ]

APPROVALS:

F.L.L.D3.030A.AN.19A

CIRCUIT DIAGRAM:

ELECTRICAL SPECIFICATIONS:

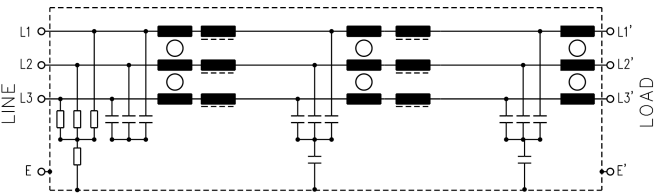


RATED VOLTAGE	:	460Vac, 50/60Hz. 10% fluctuation in voltage supply accepted.
RATED CURRENT	:	30 Amps max.
LEAKAGE CURRENT	:	11mA max @ 460Vac, 50Hz.
CLIMATIC CATEGORY	:	HPF (25/085/21)
LINE TO LINE CAPACITORS	:	9 x 2.2uF(X2) MKT.
LINE TO GROUND CAPACITORS:	:	2 x 47nF(Y).
LINE INDUCTANCE	:	4.5mH per phase.
LINE RESISTANCE	:	< 20 milliohms
VOLTAGE PROOF	:	Line to Line: 1700Vdc, 2 sec Lines to Ground: 2700Vdc, 2 sec.

MECHANICAL SPECIFICATIONS:

MANUFACTURE: Tin plated steel enclosure and lid. Electrical components sealed with self-extinguishing resin.

CONNECTIONS: All connections M5 threaded terminals with nuts and washers.

DIMENSIONS: (mm).

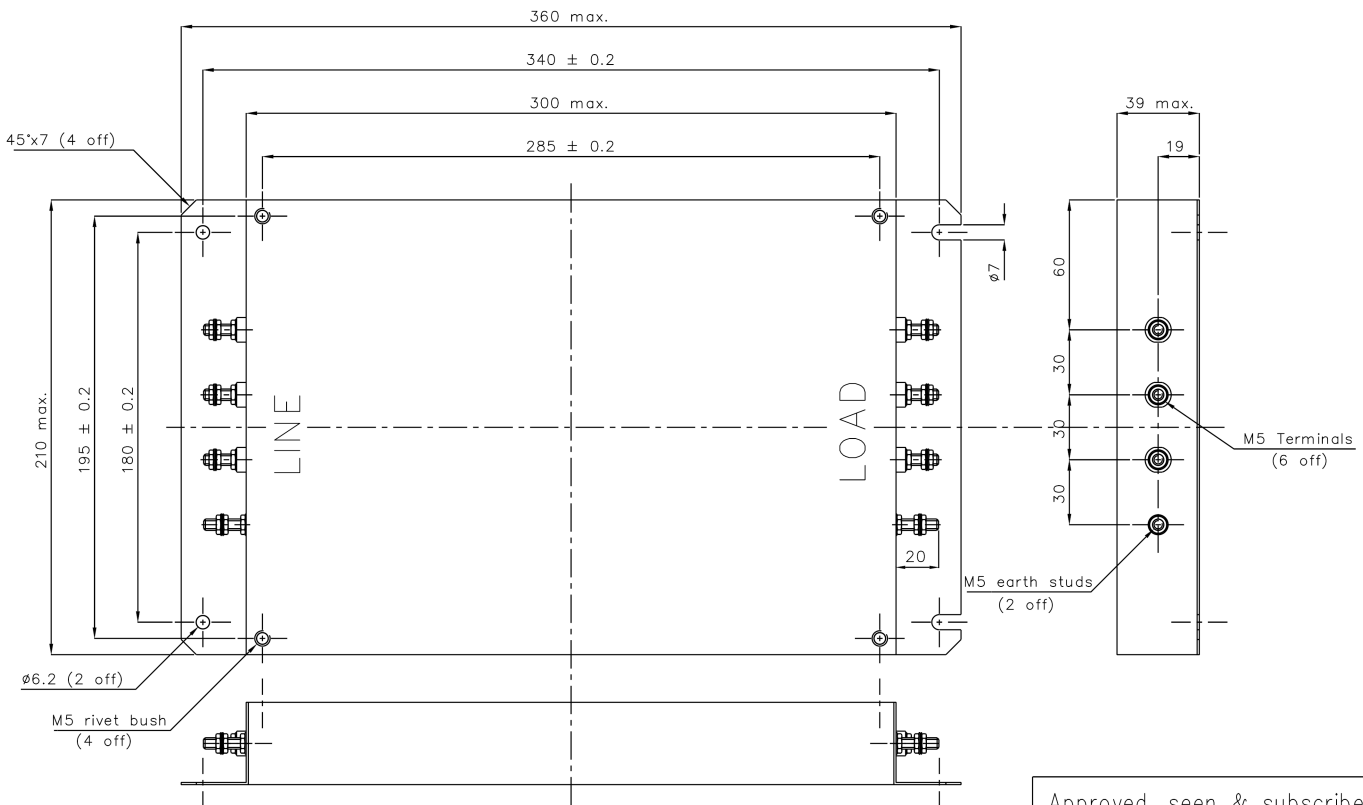

Approved, seen & subscribed

ISSUE: 1.  
DATE: 1st October 1997.

COMPILED BY: D.Morrison.

.....  
Customer's stamp and signature.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power Line Filters](#) category:*

*Click to view products by [Kemet](#) manufacturer:*

Other Similar products are found below :

[6609019-3](#) [6609026-5](#) [6609030-6](#) [6609973-2](#) [D30A](#) [7-1609090-5](#) [F2810](#) [F4456A](#) [F7382Z](#) [F7863Z](#) [FAHAV3100ZC000](#) [806276](#) [FN2020B-1-06](#) [FN2080B-10-06](#) [FN2410H-32-33](#) [FP144](#) [FS4153-20-06](#) [FS4353-500-99](#) [12-MMB-030-11-D](#) [DB4-393](#) [15811T200](#) [20B1](#) [LC630](#) [2B1](#) [1609080-2](#) [1609993-8](#) [1-6609070-1](#) [F1100AA02](#) [F1150CC10](#) [F1500CA10](#) [F1500CA15](#) [F4041Z](#) [F7585E](#) [1B1](#) [FN2070A-16-06](#) [FN2090A-20-06](#) [FN2090B-12-06](#) [FN2410H-25-33](#) [FN2410H-60-34](#) [FN2410H-8-44](#) [FN2412H-8-44](#) [FN323B-6-01](#) [FN3258H-130-35](#) [FN610R-3-06](#) [20EHQ7](#) [20EHZ7](#) [20K1](#) [30B6](#) [3K1](#) [03DRDW3](#)