



MF52 环氧 NTC 热敏电阻系列
MF52 epoxy NTC thermistor series

环氧 NTC 热敏电阻是一种树脂密封径向热敏电阻。尺寸小，反应速度快，可广泛用于各种应用。

The epoxy NTC thermistor is a resin sealed radial thermistor. Small size and fast response, it can be widely used in various applications.



■ 用途 Use

空调设备，热水器等各种家用电器家居设备，医疗，防灾，电池，安全设备，OA 设备，安全装置，测量装置，其他温度检测
Air conditioners, water heaters, etc. Appliances for home use, medical care, fire protection, batteries, safety devices, OA devices, safety devices, measuring devices, other temperature devices

■ 规格参数 Specifications

型号 Model	零负载电阻 ^{*1} Zero load resistance			规格温度 ^{°C} Specification temperature	B 值参数 ^{*2} B value parameter	精度偏差 Precision deviation	使用温度范围 ^{°C} Operating temperature range
	规格温度 Rating temperature	电阻值 Resistance	精度偏差 Precision deviation				
5K3470	25 ^{°C}	5K Ω	±1% ±2% ±3% ±5% ±T% ^{*3}	B25/50	3470	±1% ±2% ±3% ±5% ±T% ^{*3}	-40~125
10K3380/3435		10K Ω			3380		
10K3500					3435		
10K3950					3500		
10K4100					3950		
15K4150					4100		
2.252K3935		15K Ω			4150		
3K3950		2.252 K Ω			3935		
5K3950		3 K Ω			3950		
50K3950		5 K Ω					
100K3950		50 K Ω					
23K4200		100K Ω					
100K4200		23K Ω					
100K4150		100K Ω			4200		
100K4450					4150		
3.4513K3435	4450						
31.765K4550	50 ^{°C}	3.4513 K Ω	B25/85	3435			
2.028K4330	50 ^{°C}	31.765K Ω		4550			
5K3300	86 ^{°C}	2.028 K Ω		4330			
	25 ^{°C}	5K		3300			

★上述为部分常规型号，不代表全部参数，可联系咨询。The above is a part of the regular model, does not represent all parameters, can contact us.


- 耗散系数 Dissipation coefficient: $\approx 1.5\text{mW}/^{\circ}\text{C}$
- 热时间常数 Thermal time constant: $\leq 10\text{s}$
- 额定功率 Rated power: $\approx 4.5\text{mW}$ at 25^{°C}
- 耐电压 Withstand voltage: AC300V/1mA/60s
- 绝缘阻抗 Insulation resistance: DC50V/50M Ω /60s

※1: 在指定温度下的零负载电阻 Zero load resistance at specified temperature。

※2: 根据指定温度下的零负载电阻计算 Calculated based on zero load resistance at the specified temperature。

※3: 定制特殊精度 Custom special precision

尺寸参数 Size parameters

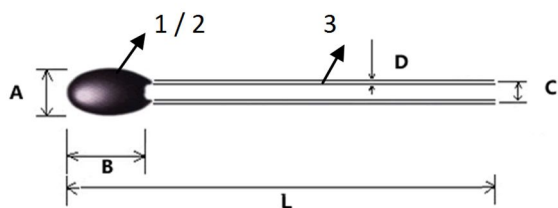

1	2	3
芯片 Chip	黑色树脂 Black Resin	CP 裸引线 CP bare lead

A	B	C	D	L ^{※4}
Max 3	Max 5	2.0±1	0.33±0.05	33±3

※4: L 尺寸可以剪短 L size can be cut short

性能 Performance

试验项目 Pilot projects	试验条件 Test conditions	标准 Standard
可焊性 Solderability	引线浸在 280±5℃ 的锡液里, 时间 ≥3 秒 The lead is immersed in a tin bath at 280 ± 5 ° C for ≥ 3 seconds	焊锡涂布面积在 80% 以上 Solder coating area is over 80%
耐焊性 Solder resistance	焊接热源距离电阻头 B 距离 ≥9MM, 280±20℃, 时间 ≤2 秒 The distance between the welding heat source and the resistance head B is ≥9MM, 280±20° C, time ≤2 seconds	ΔR ≤ ±3% ΔB ≤ ±1%
高温储存 High temperature storage	空气中 100±5℃ 放置 1000 小时 250±5° C in the air for 1000 hours	ΔR ≤ ±3% ΔB ≤ ±2%
低温储存 Low temperature storage	空气中 -10±5℃ 放置 1000 小时 1000 hours at -10 ± 5 ° C in the air	ΔR ≤ ±3% ΔB ≤ ±2%
冷热冲击 Thermal shock	-10±5℃/3 分钟 ↔ 100±5℃/3 分钟 循环 300 次 -10±5° C/3 minutes ↔ 100±5° C/3 minutes Cycle 300 times	ΔR ≤ ±3% ΔB ≤ ±1%
稳态湿热 Steady state damp heat	湿度 85±5%, 85±5℃ 放置 1000 小时 Humidity 85±5%, 85±5° C, 1000 hours	ΔR ≤ ±3% ΔB ≤ ±2%
跌落测试 Drop test	1 米高处自由跌落 3 次 Free fall 3 times at 1 meter height	无可见损伤 No visible damage ΔR ≤ ±3% ΔB ≤ ±1%
拉力测试 Pull test	固定电阻本体, 引线端水平逐渐施加 3N 的拉力, 3 秒 Fixed resistor body, the lead end level gradually applies 3N pulling force, 3 seconds	ΔR ≤ ±3% ΔB ≤ ±1%
弯曲测试 Bending test	电阻引脚弯曲 90 度, 恢复到初始位置, 反复 3 次 The resistance pin is bent 90 degrees and returns to the initial position, repeated 3 times.	ΔR ≤ ±3% ΔB ≤ ±1%
保存/期限 Save/term	(原包装状态) 避免阳光照射, 远离腐蚀、磁场环境 温度: -10 至 35℃ 湿度: 45% 至 75% 保存期: 1 年 (零负载) (Original packaging status) Avoid sunlight, away from corrosion, magnetic field environment, Temperature: -10 to 35 ° C Humidity: 45% to 75% Storage period: 1 year (zero load)	ΔR ≤ ±1% ΔB ≤ ±1%

注意事项 Precautions

■ 使用焊料连接引线时, 焊接距离封装末端 9 mm 或更远的距离。

When soldering the leads, solder the distance 9 mm or more from the end of the package.

■ 处理引线时, 将其固定在距离玻璃密封端 9 毫米或更远的位置。When handling the leads, fix them 9 mm or more from the glass seal end.

■ 不可直接使用在潮湿环境下。Cannot be used directly in wet conditions.

■ 参考资料, 以产品最新技术承认书为准。Reference materials, subject to the latest technical recognition of the product.

■ 中英文有分歧, 以中文为准。There are differences between Chinese and English, whichever is Chinese.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for NTC (Negative Temperature Coefficient) Thermistors category:

Click to view products by Kemit manufacturer:

Other Similar products are found below :

[B57364S2509A002](#) [526-31AA19-104](#) [526-31AN12-202](#) [11028414-00](#) [526-31AA79-102](#) [PTCLL05P131TBE](#) [144-101FAG-001](#) [521-53AW02-104](#) [1-1423022-3](#) [MF0916001M4BP0FPT0](#) [MF58-5.91KF3820-B1](#) [04M5002SFA4](#) [NCG18WF104F0SRB](#)
[NXFT15WF104FEAB035](#) [NXFT15WF104FEAB040](#) [NXFT15XV103FEAB030](#) [NXFT15XV103FEAB025](#) [NXFT15XV103FEAB040](#)
[NXFT15XH103FEAB050](#) [NXFT15XH103FEAB040](#) [NCG18XH103F0SRB](#) [USUR1000-502G-06](#) [NXFT15XH103FEAB045](#)
[B57864S0502F040](#) [NTCALUG01A103G611](#) [GA50K6A1IA](#) [GA10K3MR1I](#) [NXFT15XV103FEAB035](#) [NXFT15XV103FEAB021](#)
[NXFT15XV103FEAB045](#) [GA50K6A1IB](#) [GA30K5A1A](#) [GA10K4A1IA](#) [A1004SS22P63](#) [11031964-00](#) [NXFT15XH103FEAB035](#)
[NXFT15WF104FEAB021](#) [GA100K6A1IB](#) [11026149-00](#) [TCTR0805F10K0F4460T](#) [TCTR0805F10K0F3720T](#) [TCTR0603F100KF4460T](#)
[TCTR0603F100KF4390T](#) [TCTR0603F100KF4050T](#) [TCTR0603F100KF3980T](#) [TCTR0603F10K0F4300T](#) [TCTR0603F10K0F3960T](#)
[TCTR0603F10K0F3930T](#) [TCTR0805F100KF4460T](#) [TCTR0805F100KF4310T](#)