


0.47A All Diffused Type SCR Power Mini Mold 03P4J

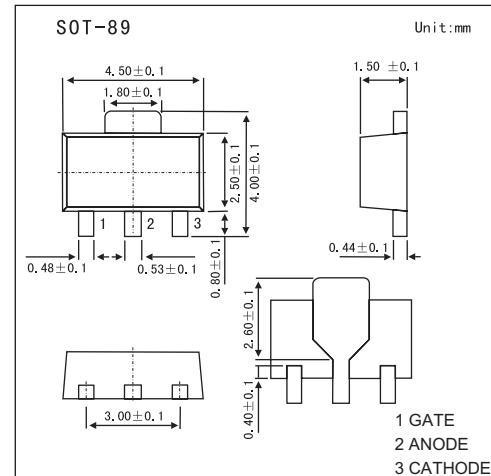

■ Features

- High Anode to Cathode Voltage: V_{DRM} : V_{RRM} =200V

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Non-Repetitive Peak Reverse Voltage	V_{RSM}	500	V
Non-Repetitive Peak -off Voltage	V_{DSM}	500	V
Repetitive Reverse Voltage	V_{RRM}	400	V
Repetitive Peak-off Voltage	V_{DRM}	400	V
Average On-State Current *1	$I_{T(AV)}$	0.3	A
RMS On-State Current	$I_{T(RSM)}$	0.47	A
Surge On-stage Current	I_{TSM}	6	A
Fusing Current $1\text{ms} \leq t \leq 10\text{ms}$	$\int i^2 dt$	0.15	A^2s
Gate Power Dissipation *2	P_{GM}	0.1	W
Gate Power Dissipation	$P_{G(AV)}$	0.01	W
Gate Forward Current *2	I_{FGM}	0.1	A
Gate Reverse Voltage	V_{RGM}	6	V
Junction Temperature	T_J	-55 to +125	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to +150	$^\circ\text{C}$







*1 $T_A=77^\circ\text{C}$, Single Phase half wave

*2 $f \geq 50\text{Hz}$, Duty $\leq 10\%$






■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Testconditons	Min	Max	Unit
Repetitive Peak Reverse Current	I_{RRM}	$V_{RM}=V_{RRM}, T_J=25^\circ\text{C}$		10	μA
		$V_{RM}=V_{RRM}, T_J=125^\circ\text{C}$		100	μA
Repetitive Peak Off-state Current	I_{DRM}	$V_{DM}=V_{DRM}, T_J=25^\circ\text{C}$		10	μA
		$V_{RM}=V_{RRM}, T_J=125^\circ\text{C}$		100	μA
On-state Voltage	V_{TM}	$I_{TM}=1\text{A}$		1.6	V
Gate-Trigger Current	I_{GT}	$V_{DM}=6\text{V}, R_L=100\Omega$		200	μA
Gate-Trigger Current	V_{GT}	$V_{DM}=6\text{V}, R_L=100\Omega$		0.5	V
Gate Non-Trigge Voltage	V_{GD}	$V_{DM}=1/2 V_{DRM}, T_J=125^\circ\text{C}$	0.1		V
Critical Rate-of-Rise of Off-stage Voltage	dv/dt	$V_{DM}=2/3 V_{DRM}, T_J=125^\circ\text{C}$	40		$\text{V}/\mu\text{s}$
Holding Current	I_H	$V_D=24\text{V}, I_{TM}=1\text{A}$		5	mA
Thermal Resistance	$R_{th(j-a)}$	Junction to Ambient		65	$^\circ\text{C}/\text{W}$

03P4J

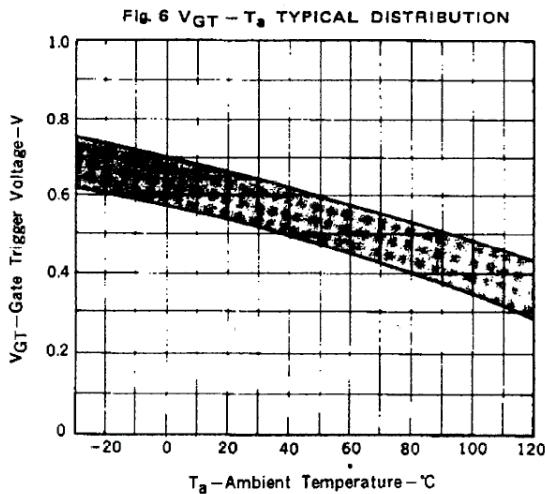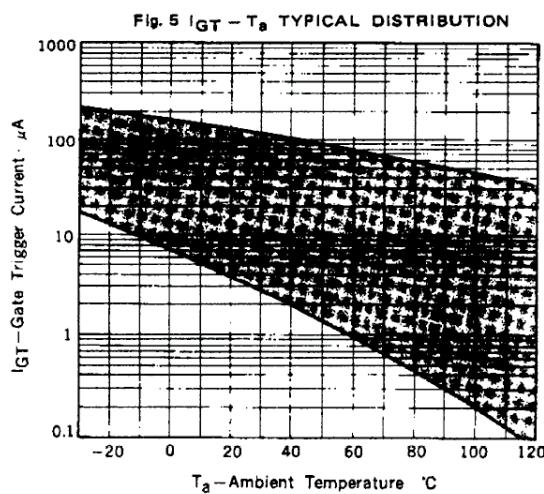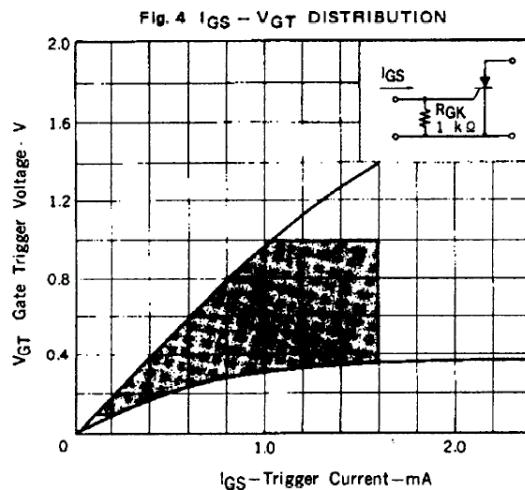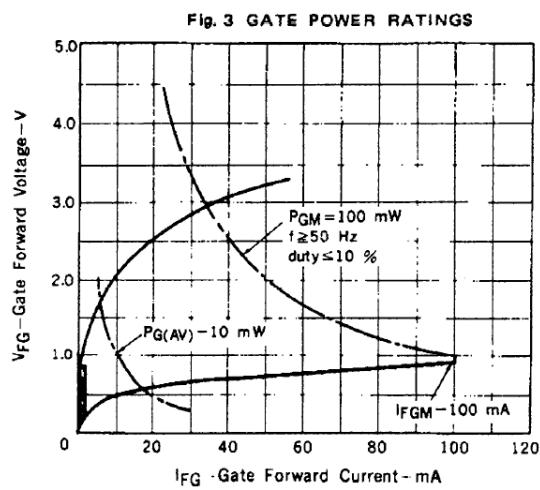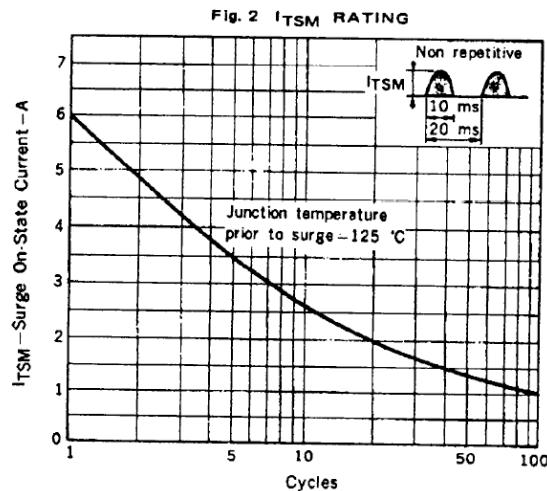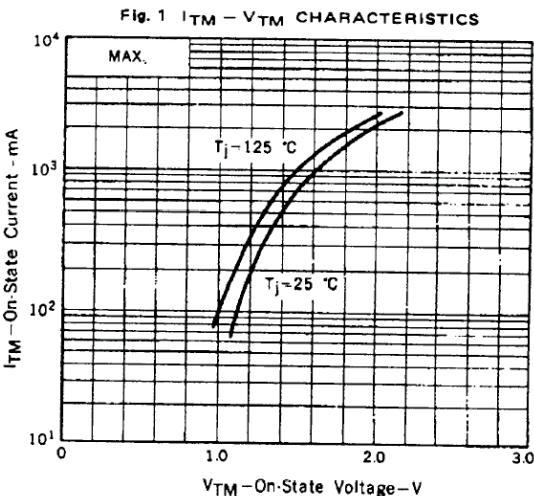

03P4J

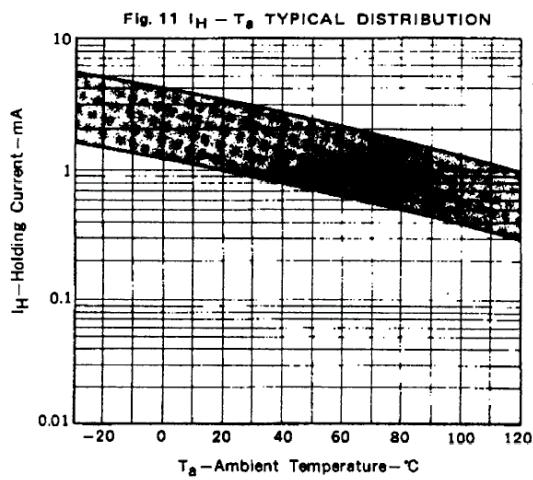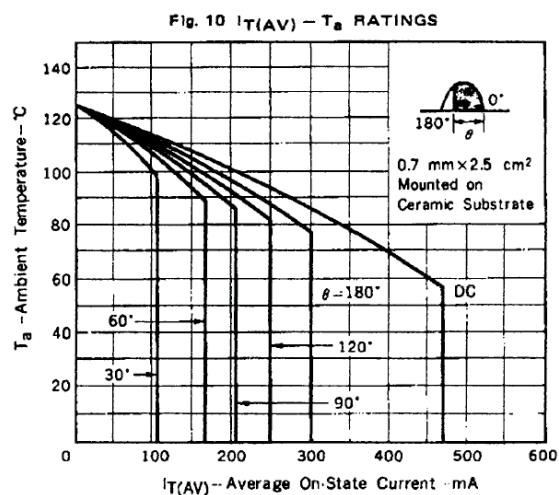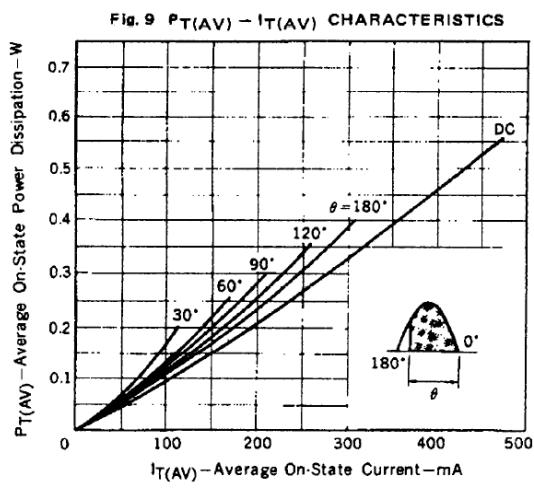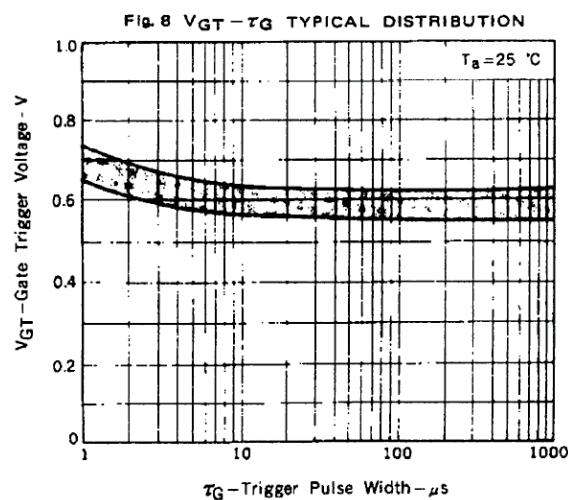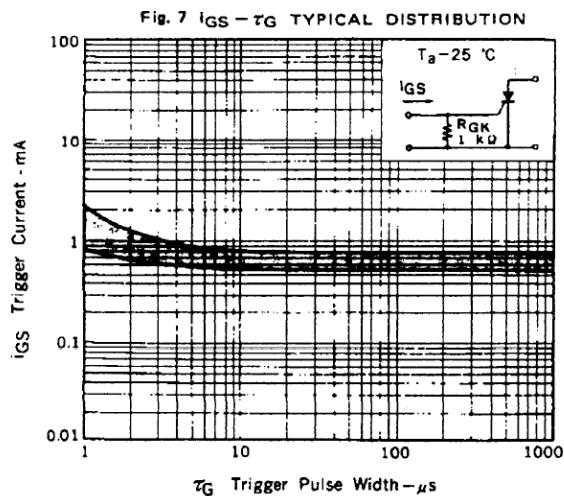

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Triacs](#) category:

Click to view products by [KEXIN](#) manufacturer:

Other Similar products are found below :

[T2035H-6G](#) [BT137-600-0Q](#) [Z0409MF0AA2](#) [Z0109NA 2AL2](#) [ACST1635T-8FP](#) [BCR20RM-30LA#B00](#) [CMA60MT1600NHR](#) [NTE5611](#)
[NTE5612](#) [NTE5613](#) [NTE5621](#) [NTE5623](#) [NTE5629](#) [NTE5638-08](#) [NTE5688](#) [NTE5689](#) [NTE5690](#) [T1235T-8I](#) [BTA312-600CT.127](#) [T1210T-8G-TR](#) [Z0109NN0,135](#) [T2535T-8I](#) [T2535T-8T](#) [TN4050-12WL](#) [MAC4DLM-1G](#) [BT137-600E,127](#) [BT137X-600D](#) [BT148W-600R,115](#)
[BT258-500R,127](#) [BTA08-800BW3G](#) [BTA140-800,127](#) [BTA30-600CW3G](#) [BTA30-600CW3G](#) [BTB08-800BW3G](#) [BTB16-600CW3G](#)
[BTB16-600CW3G](#) [Z0410MF0AA2](#) [Z0109MN,135](#) [T825T-6I](#) [T1635T-6I](#) [T1220T-6I](#) [NTE5638](#) [TYN612MRG](#) [TYN1225RG](#) [TPDV840RG](#)
[ACST1235-8FP](#) [ACS302-6T3-TR](#) [BT134-600D,127](#) [BT134-600G,127](#) [BT136X-600E,127](#)