



Reliable Power, Repeatable Results

- Linear power supply
- Dual or triple output
- 10-turn voltage and current control
- Low noise and excellent regulation



Affordable, Full-Featured Benchtop Power Supplies Provide Excellent Performance and Flexibility

Multiple-output non-programmable models

The Keysight Technologies, Inc. E3620A and E3630A low-cost benchtop power supplies give you the performance of system power supplies at a decent price. Both supplies provide clean power with excellent regulation and a fast transient response.

With multiple supplies in a compact unit, the E3620A and E3630A provide excellent performance while saving space on your bench. Both instruments feature a tight 0.01 percent line and load regulation and a low normal mode noise specification of less than 0.35 mV to ensure clean power for precision circuitry. With a common mode current specification of less than 1 μ A, both multiple-output power supplies minimize the power line current injection.

The E3620A and E3630A feature separate digital panel meters so you can monitor the voltage and current simultaneously. They also protect your DUT against overload and short-circuit damage. Smooth turn-on and turn-off transitions keep power spikes out of your circuits. Auto-tracking permits equal or proportional voltage sharing, and allows control of output voltage from one master unit. The master and slave supplies have the same output polarity with respect to a common bus or ground. This operation is useful where simultaneous turn-up, turn-down or proportional control of all power supplies is required.

E3620A dual-output power supply

The 50-watt E3620A dual-output power supply provides two 0 V to 25 Vdc outputs with the maximum current of 1 A to satisfy most bench requirements. The outputs are completely independent and isolated.

E3630A triple-output power supply with auto-tracking feature

The 35-watt E3630A triple-output power supply provides three DC outputs: 0 to 6 V with a maximum current of 1 to 2.5 A and 0 to 20 V and 0 to %20 V with a maximum current of 0.5 A. An auto-tracking feature lets you use one voltage control to adjust the +20 V and %20 V outputs simultaneously. The outputs track each other to within 1 percent, making it easy to adjust the power supply for circuits requiring balanced voltages.

Specifications

	E3620A	E3630A
Features	Isolated dual outputs, 10 turn pots CV, CL	Tracking, CV, CL (± 20 V) CV, CF (+6 V)
Number of outputs	2	3
Number of output ranges	1	1
DC output rating	25 V, 1 A	+6 V, 2.5 A
	25 V, 1 A	+20 V, 0.5 A
		–20 V, 0.5 A
Load and line regulation	< 0.01% + 2 mV	
Ripple and Noise (20 Hz to 20 MHz)		
Normal mode voltage	< 350 μVrms, < 1.5 mVpp	
Normal mode current	-	
Transient response time	< 50 µsec following a change in output current from full load to half load for output to recover within: 15 mV	
Meter accuracy	± 0.5% + 2 counts at 25 °C ± 5 °C	

Supplemental Characteristics

	E3620A	E3630A
Control mode	CV/CL	CV/CL (± 20 V) CV/CF (+ 6 V)
Common mode current	< 1 µArms	
Meter resolution		
Voltage	10 mV (0-20 V), 100 mV (> 20 V)	10 mV
Current	1 mA	10 mA
Temperature coefficient per °C		
Voltage	< 0.02% + 1 mV	
Current	-	
Output Drift		
Voltage	Less than 0.1% + 5 mV total drift for 8 hours after initial warm-up of 30 minutes	
Current	N/A	
Temperature range	Derate output current 50% between 40 °C to 55 °C	
Cooling	Convection cooling	
Isolation	± 240 Vdc	
AC Input	100 Vac ± 10%, 47–63 Hz (opt. 0E9) 115 Vac ± 10%, 47–63 Hz (std) 230 Vac ± 10%, 47–63 Hz (0E3)	
Weight	5.0 kg (11.0 lbs) net, 6.25 kg (13.8 lbs) shipping	3.8 kg (8.4 lbs) net, 5.1 kg (11.3 lbs) shipping
Size	88.1 mm H x 212.3 mm W x 392.4 mm D 3.5" H x 8.4" W x 15.4" D	88.1 mm H x 212.3 mm W x 318.4 mm D 3.5" H x 8.4" W x 12.5" D
Warranty	Three year for E3600 Series power supplies Three months for standard shipped accessories	
Product regulation	Certified to CSA 22.2 No. 231; conforms to IEC 1010-1; carries CE mark; complies with CISPR-11, Group 1, Class A, KC South Korean EMC Mark, Canadian ICES/NMB-001, Australian C Tick Mark	

Ordering information

E3620A Dual-output power supply E3630A Triple-output power supply

Standard shipped accessories

Product reference CD, power cord

Power options

Opt. 0E3 230 Vac ± 10% Opt. 0EM 115 Vac ± 10% Opt. 0E9 100 Vac ± 10%

Other options

Opt. 1CM or 34190A rackmount kit* (Only applicable for E3620A) Opt. UK6 Commercial calibration certificate with test result data E3600A-100 Test lead kit

Manual sets

Please visit www.keysight.com/find/manuals for the latest revisions of manuals.

Rackmount kits*

E3620A

To rackmount two instruments side-by-side

- Lock-link Kit (P/N 5061-9694)
- Flange Kit (P/N 5063-9212) or 34191A

To rackmount one or two instruments in a sliding support shelf


- Support Shelf (P/N 5063-9255)
- Slide Kit (P/N 1494-0015) required for support shelf

For a single instrument, also order filler panel (P/N 5002-3999)

- * Rackmounting with 1CM or lock-link/flange kit requires
 - Keysight or customer support rails
 - Keysight Support Rails-E3663AC.

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology. From Hewlett-Packard to Agilent to Keysight.

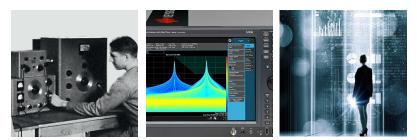

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

http://www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES Accelerate Technology Adoption. Lower costs.

Keysight Services www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings-onestop calibration, repair, asset management, technology refresh, consulting, training and more-helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

India

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444
Asia Pacific	

Australia

1 800 629 485 China 800 810 0189 Hong Kong 800 938 693 1 800 11 2626 Japan 0120 (421) 345 080 769 0800 Korea Malaysia 1 800 888 848 Singapore 1 800 375 8100 0800 047 866 Taiwan Other AP Countries (65) 6375 8100

Europe & Middle East

United Kingdom

For other unlisted countries: www.keysight.com/find/contactus (BP-9-7-17)

0800 0260637



www.keysight.com/go/quality Keysight Technologies, Inc. DEKRA Certified ISO 9001:2015 Quality Management System

This information is subject to change without notice. © Keysight Technologies, 2009 - 2018 Published in USA, May 3, 2018 5968-9727EN www.keysight.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Benchtop Power Supplies category:

Click to view products by Keysight manufacturer:

Other Similar products are found below :

NL200 PR20 ZUPNC403 ZUP/W ZUPNC402 TL89F2 TL89K1 TL89T1 1332A-NIST ACC-GENH/RM ODP3033 ODP3063 ODP3122 ODP6033 ODP6062 BK9202B BK1697B P 2235 P 6210 P 6215 P 6300 PL155-P(G) PL303QMD-P(G) PLH250-P(G) SPE3051 SPE3102 SPE3103 SPE6053 GEN-150-10 GEN-20-38/LN GEN-300-5 GEN-40-19/LN GEN-50-30/LN GEN-60-12.5/LN GEN-60-55-1P230 GEN-600-1.3 GENH-30-25/LN GENH-300-2.5 GENH-60-12.5/LN CPX200DP AX-3003P AX-6003P AX-8450A TPM-3003 HMP2020 HMP2030 HMP4040 1350 UT804 1410