



1. Features

- $R_{DS(on)}=2.2m\Omega$ (typ.) @ $V_{GS}=10V$
- Advanced Trench Technology
- Low Gate Charge
- High Current Capability
- RoHS and Halogen-Free Compliant

2. Description

- Power Management in Desktop Computer
- DC/DC Converters

3. Symbol

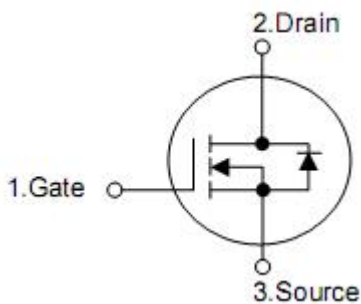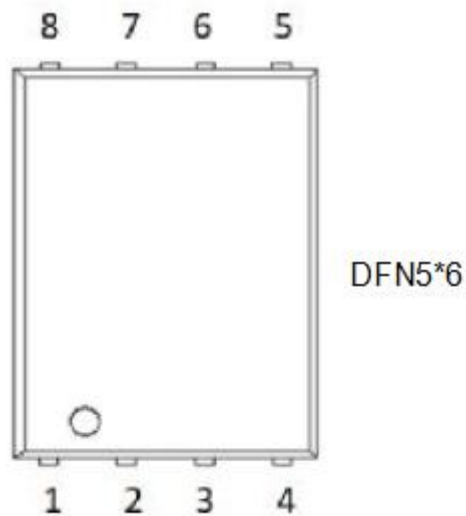

Pin	Function
4	Gate
5,6,7,8	Drain
1,2,3	Source

4. Ordering Information

Part Number	Package	Brand
KCY3303S	DFN5*6	KIA

5. Absolute maximum ratings

Parameter	Symbol	Rating	Units
Drain-source voltage	V_{DS}	30	V
Gate-source voltage	V_{GS}	± 20	V
Continuous drain current $V_{GS}@10V^{1,6}$	I_D	$T_C=25^\circ C$	95
		$T_C=100^\circ C$	76
Pulsed drain current ²	I_{DM}	280	A
Single pulse avalanche energy ³	EAS	151	mJ
Avalanche current	I_{AS}	55	A
Total power dissipation ⁴	P_D	48	W
Junction and storage temperature range	T_J, T_{STG}	-55 to 150	$^\circ C$

6. Thermal Data

Parameter	Symbol	Ratings	Units
Thermal resistance, junction-ambient ¹	$R_{\theta JA}$	50	$^\circ C/W$
Thermal resistance, Junction-case ¹	$R_{\theta Jc}$	2.6	

7. Electrical characteristics

(T_J=25°C, unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Drain-Source breakdown voltage	BV _{DSS}	V _{GS} =0V, I _D =-250μA	30	-	-	V
Drain-Source Leakage Current	I _{DSS}	V _{DS} =24V, V _{GS} =0V, T _J =25°C	-	-	1	μA
		V _{DS} =24V, V _{GS} =0V, T _J =55°C	-	-	5	
Gate-source leakage current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V	-	-	±100	nA
Gate threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	1.2	1.6	2.5	V
Static drain-source on- resistance ²	R _{DS(on)}	V _{GS} =10V, I _D =20A	-	2.2	2.8	mΩ
		V _{GS} =4.5V, I _D =20A	-	3.2	3.8	
Forward transconductance	g _{FS}	V _{DS} =5V, I _D =20A	-	90	-	S
Gate Resistance	R _g	V _{GS} =0V, V _{DS} =0V F=1MHZ	-	1.6	-	Ω
Total gate charge(4.5V)	Q _g	V _{DS} =15V, V _{GS} =10V I _D =20A	-	20	-	nC
Gate-source charge	Q _{gs}		-	12	-	
Gate-drain charge	Q _{gd}		-	14.5	-	
Turn-on delay time	t _{d(on)}	V _{DD} =15V, R _G =3.3Ω, V _{GS} =10V I _D =-20A	-	11	-	ns
Rise time	t _r		-	6	-	
Turn-off delay time	t _{d(off)}		-	38	-	
Fall time	t _f		-	11	-	
Input capacitance	C _{iss}	V _{GS} =0V, V _{DS} =15V F=1.0MHZ	-	3030	-	pF
Output capacitance	C _{oss}		-	1580	-	
Reverse transfer capacitance	C _{rss}		-	205	-	
Diode characteristics						
Continuous source current ^{1,6}	I _S	V _G =V _D =0V, Force current	-	-	95	A
Diode forward voltage ²	V _{SD}	V _{GS} =0V, I _S =1A, T _J =25°C	-	-	1.4	V

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width ≅ 300us , duty cycle ≅ 2%
- 3.The EAS data shows Max. rating . The test condition is V_{DD}=25V, V_{GS}=10V, L=0.1mH, I_{AS}=55A
- 4.The power dissipation is limited by 150°C junction temperature
- 5.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.
- 6.Package limitation current is 85A.

8. Test circuits and waveforms

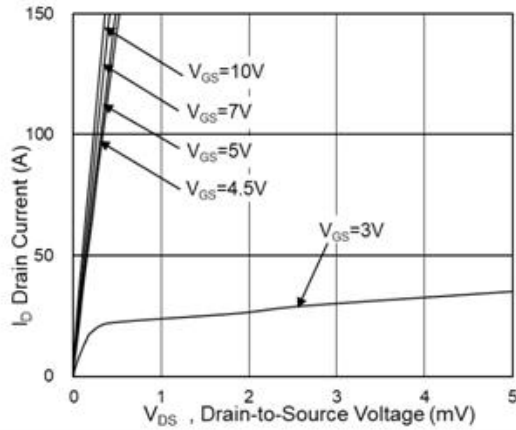


Fig.1 Typical Output Characteristics

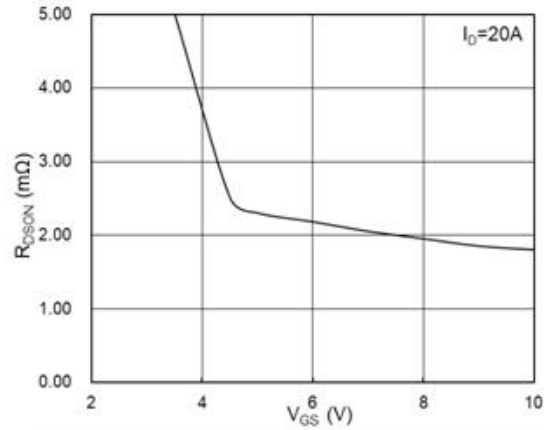


Fig.2 On-Resistance vs G-S Voltage

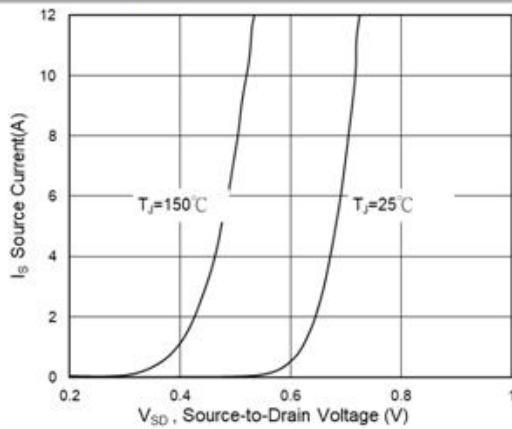


Fig.3 Source Drain Forward Characteristics

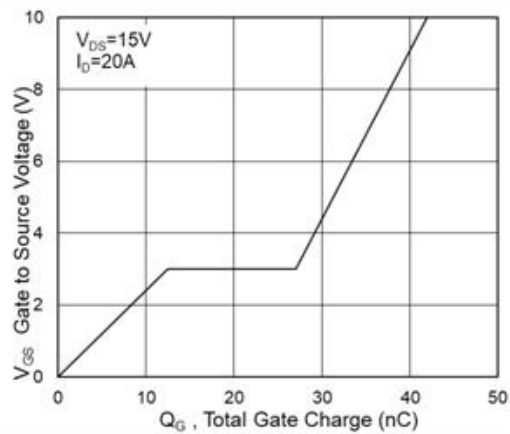


Fig.4 Gate-Charge Characteristics

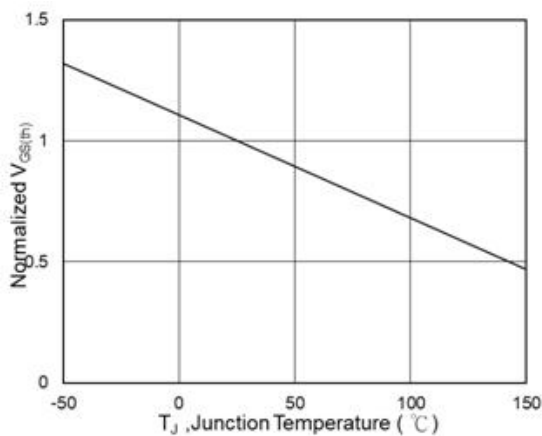


Fig.5 Normalized $V_{GS(th)}$ vs T_J

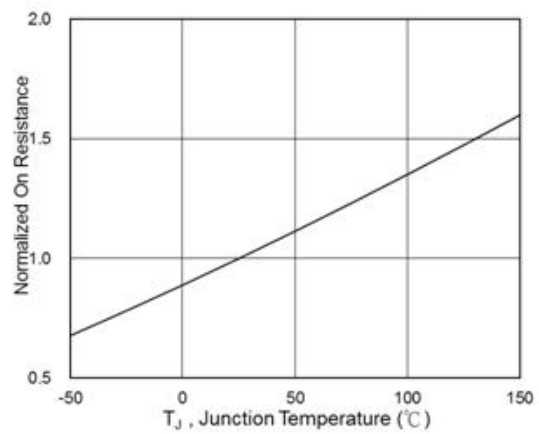


Fig.6 Normalized $R_{DS(on)}$ vs T_J

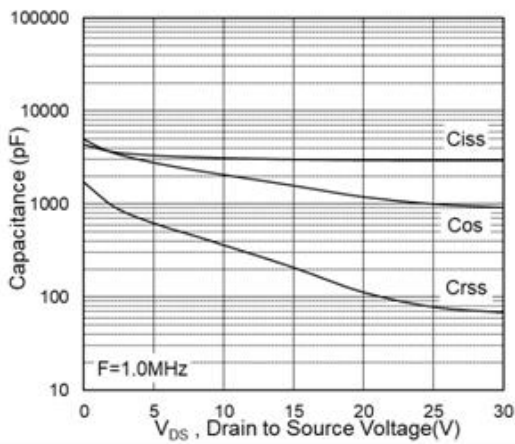


Fig.7 Capacitance

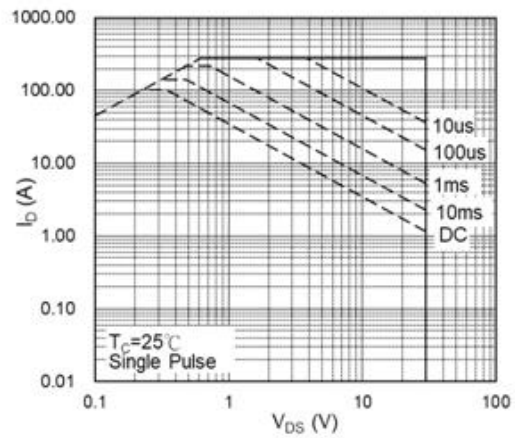


Fig.8 Safe Operating Area

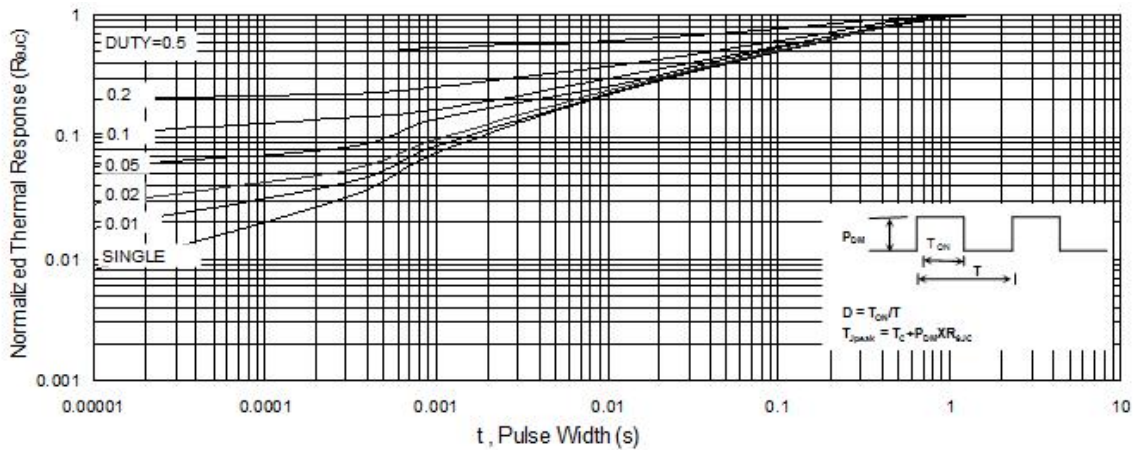


Fig.9 Normalized Maximum Transient Thermal Impedance

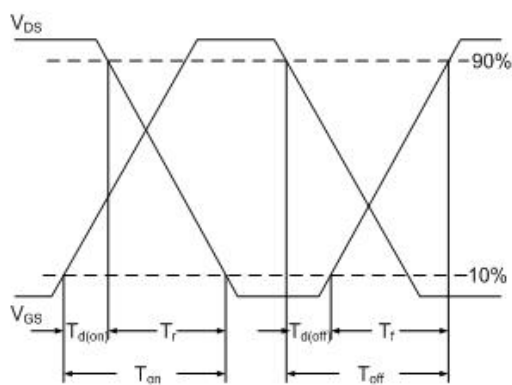


Fig.10 Switching Time Waveform

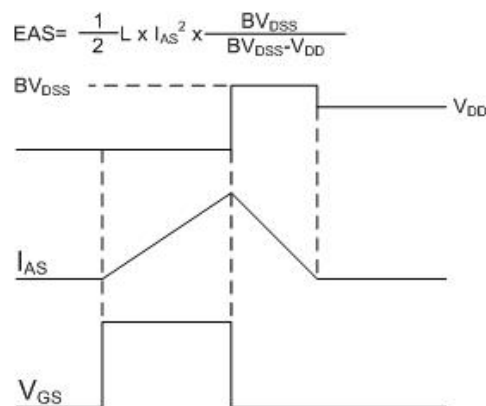


Fig.11 Unclamped Inductive Switching Waveform

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [KIA](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#) [IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#)
[TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#)
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#)
[IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [MCQ7328-TP](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#)
[BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#) [SLF10N65ABV2](#)
[BSO203SP](#) [BSO211P](#) [IPA60R230P6](#) [IPA60R460CE](#)