



1. Description

The KIA730H N-Channel enhancement mode silicon gate power MOSFET is designed for high voltage, high speed power switching applications such as switching regulators, switching converters, solenoid, motor drivers, relay drivers.

2. Features

- $R_{DS(on)}=0.83\Omega$ (Typ) @ $V_{GS}= 10$ V
- Low gate charge(typical 20nC)
- Avalanche energy specified
- Fast switching capability
- Improved dv/dt capability

3. Pin configuration

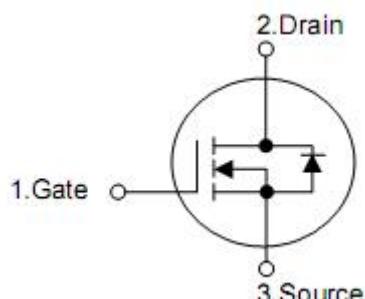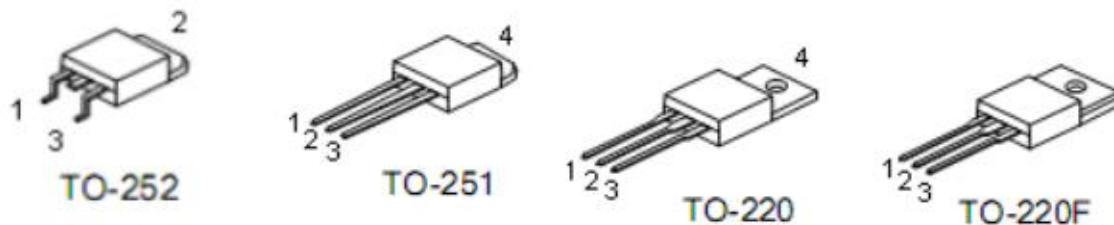

Pin	Function
1	Gate
2	Drain
3	Source
4	Drain

4. Absolute maximum ratings

Parameter		Symbol	Ratings			Units
			T0251	T0220	T0220F	
Drain-source voltage		V _{DSS}	400			V
Gate-source voltage		V _{GSS}	±30			V
Drain current continuous	T _c =25°C	I _D	6.0*	6.0	6.0*	A
	T _c =100°C		3.6*	3.6	3.6*	A
Drain current pulsed (note1)		I _{DP}	24*	24	24*	A
Avalanche energy	Repetitive (note1)	E _{AR}	7.3			mJ
	Single pulse (note2)	E _{AS}	270			mJ
Peak diode recovery dv/dt (note 3)		dv/dt	4.5			V/ns
Total power dissipation	T _c =25°C	P _D	42	73	38	W
	Derate above 25°C		0.35	0.58	0.30	W/°C
Junction temperature		T _J	+150			°C
Storage temperature		T _{STG}	-55~+150			°C

*Drain current limited by maximum junction temperature

5. Thermal characteristics

Parameter	Symbol	Rating			Unit
		TO251	TO220	TO220F	
Thermal resistance, Junction-to-case	R _{thJC}	2.11	1.71	3.31	°C/W
Thermal resistance, Junction-to-ambient	R _{thJA}	62.5	62.5	62.5	°C/W
Thermal resistance, Case-to-sink typ.	R _{thCS}	0.5	0.5	--	°C/W

6. Electrical characteristics

($T_J=25^\circ\text{C}$, unless otherwise notes)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Off Characteristics						
Drain-source breakdown voltage	BV_{DSS}	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	400	-	-	V
Zero gate voltage drain current	I_{DSS}	$V_{\text{DS}}=400\text{V}, V_{\text{GS}}=0\text{V}$	-	-	1	μA
		$V_{\text{DS}}=320\text{V}, T_c=125^\circ\text{C}$	-	-	10	μA
Gate-body leakage current	I_{GSS}	$V_{\text{GS}}=30\text{V}, V_{\text{DS}}=0\text{V}$	-	-	100	nA
		$V_{\text{GS}}=-30\text{V}, V_{\text{DS}}=0\text{V}$	-	-	-100	nA
Breakdown voltage temperature	$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	$I_{\text{D}}=250\mu\text{A}$,	-	0.54	-	V/ $^\circ\text{C}$
On characteristics						
Gate threshold voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	2.0	-	4.0	V
Static drain-source on-resistance	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=3.0\text{A}$	-	0.83	1.0	Ω
Dynamic characteristics						
Input capacitance	C_{iss}	$V_{\text{DS}}=25\text{V}, V_{\text{GS}}=0\text{V}, f=1\text{MHz}$	-	520	-	pF
Output capacitance	C_{oss}		-	80	-	pF
Reverse transfer capacitance	C_{rss}		-	15	-	pF
Switching characteristics						
Turn-on delay time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}}=200\text{V}, I_{\text{D}}=6.0\text{A}, R_{\text{G}}=25\Omega$ (note 4,5)	-	10	-	ns
Rise time	t_r		-	60	-	ns
Turn-off delay time	$t_{\text{d}(\text{off})}$		-	20	-	ns
Fall time	t_f		-	40	-	ns
Total gate charge	Q_g	$V_{\text{DS}}=320\text{V}, I_{\text{D}}=6.0\text{A}, V_{\text{GS}}=10\text{V}$ (note 4,5)	-	18	-	nC
Gate-source charge	Q_{gs}		-	2.5	-	nC
Gate-drain charge	Q_{gd}		-	8.5	-	nC
Drain-source diode characteristics						
Drain-source diode forward voltage	V_{SD}	$V_{\text{GS}}=0\text{V}, I_{\text{SD}}=6.0\text{A}$	-	-	1.4	V
Continuous Drain-source current	I_{SD}		-	-	6.0	A
Pulsed Drain-source current	I_{SM}		-	-	24.0	A
Reverse recovery time	t_{rr}	$I_{\text{SD}}=6.0\text{A}, dI_{\text{SD}}/dt=100\text{A}/\mu\text{s}$ (note 4)	-	250	-	ns
Reverse recovery charge	Q_{rr}		-	2.0	-	μC

Note: 1.Repetitive Rating:Pulse width limited by maximum junction temperature

2. $L=14\text{mH}, I_{\text{AS}}=6.0\text{A}, V_{\text{DD}}=50\text{V}, R_{\text{G}}=25\Omega$,Starting $T_J=25^\circ\text{C}$

3. $I_{\text{SD}}\leq 6.0\text{A}, dI/dt\leq 200\text{A}/\mu\text{s}, V_{\text{DD}}\leq \text{BV}_{\text{DSS}}$,Starting $T_J=25^\circ\text{C}$

4.Pulse test:pulse width $\leq 300\mu\text{s}$,duty cycle $\leq 2\%$

5.Essentially independent of operating temperature

7. Test circuits and waveforms

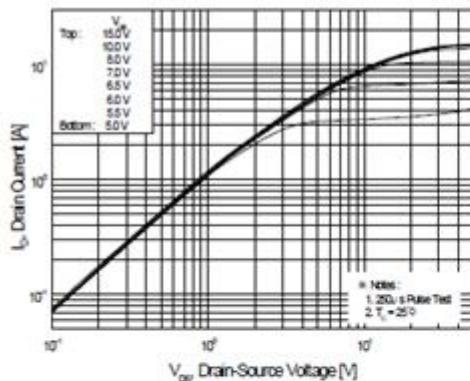


Figure 1. On-Region Characteristics

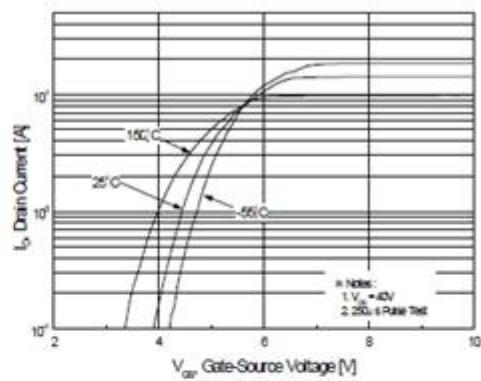


Figure 2. Transfer Characteristics

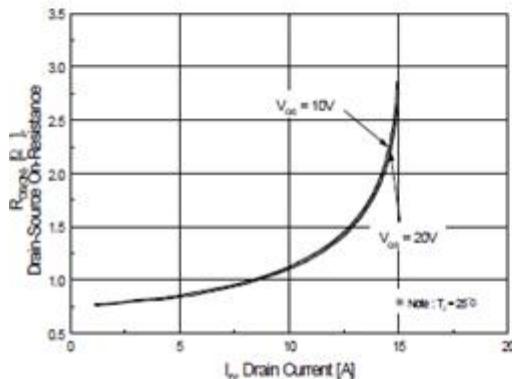


Figure 3. On-Resistance Variation vs., Drain Current and Gate Voltage

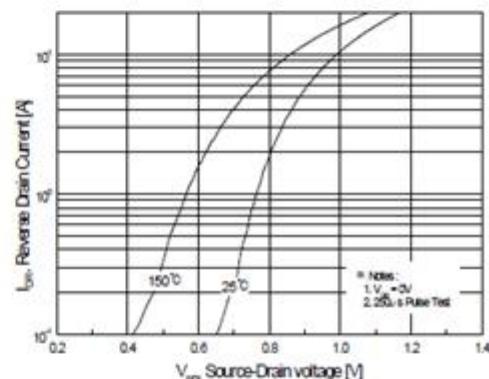


Figure 4. Body Diode Forward Voltage, Variation with Source Current, and Temperature

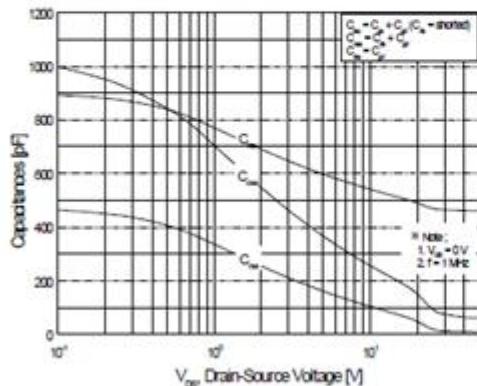


Figure 5. Capacitance Characteristics



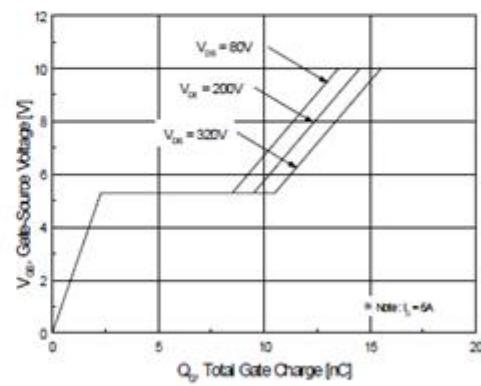



Figure 6. Gate Charge Characteristics

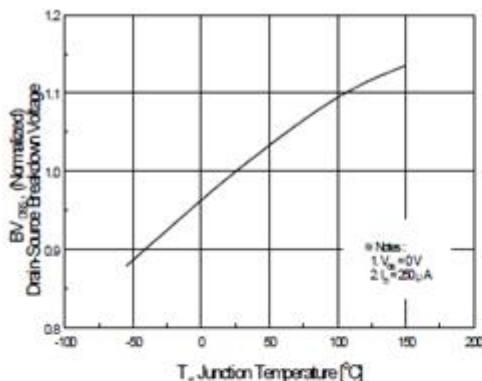


**Figure 7. Breakdown Voltage Variation
vs Temperature**

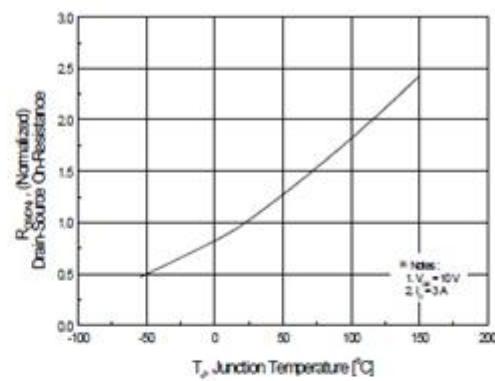


**Figure 8. On-Resistance Variation
vs Temperature**

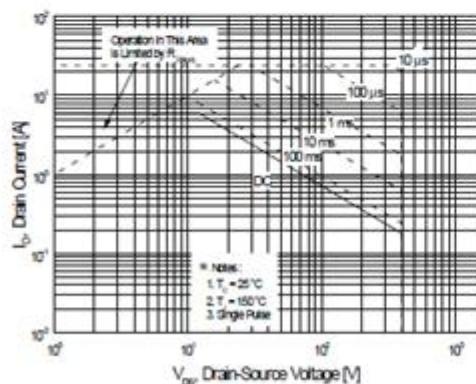

**Figure 9-1. Maximum Safe Operating Area
for TO220**

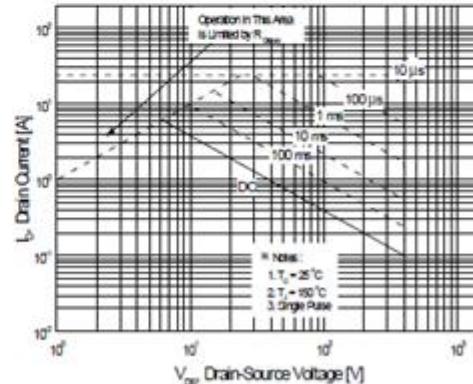

**Figure 9-2. Maximum Safe Operating Area
for TO220F or TO-251**

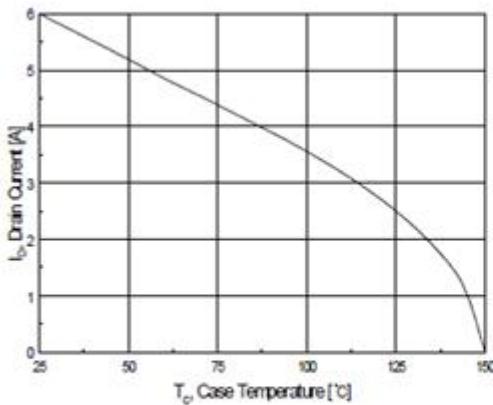

**Figure 10. Maximum Drain Current
vs Case Temperature**

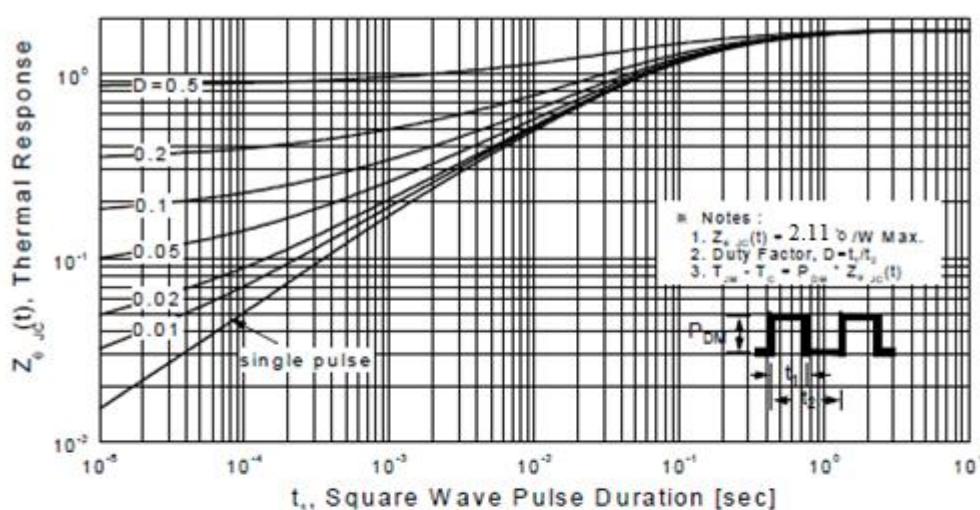


Figure 11-1. Transient Thermal Response Curve for 6A, 400V N-CHANNEL MOSFET TO-251

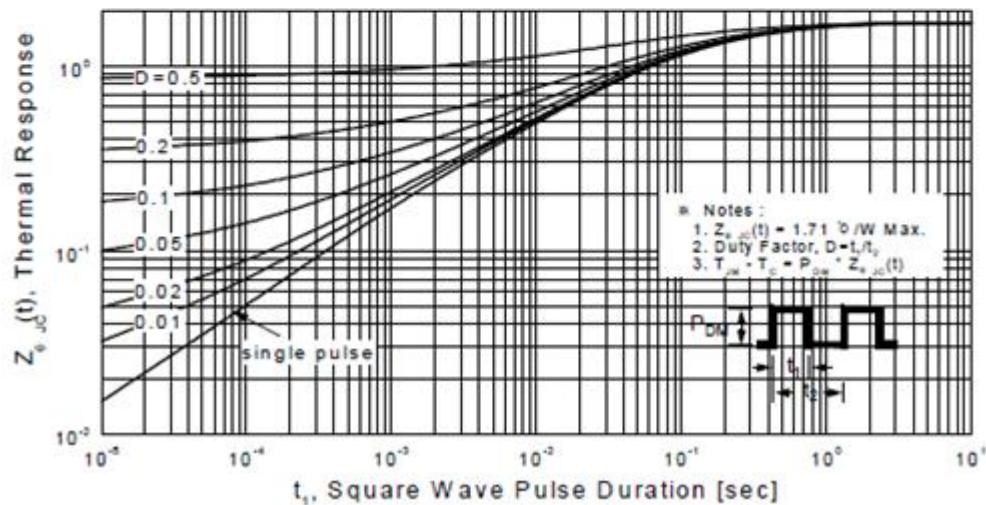


Figure 11-2. Transient Thermal Response Curve for TO220

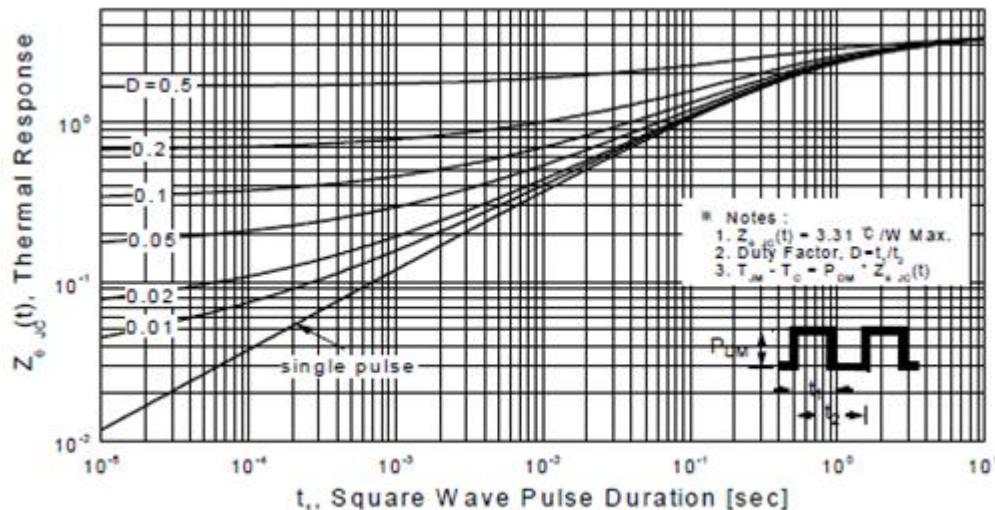


Figure 11-3 Transient Thermal Response Curve for TO220F

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by KIA manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [FDPF9N50NZ](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [FCA20N60_F109](#) [FDZ595PZ](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#)
[405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T\)](#) [751625C](#) [PSMN4R2-30MLD](#)
[TK31J60W5,S1VQ\(O\)](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#)
[NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#)
[IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [STU5N65M6](#) [C3M0021120D](#) [DMN13M9UCA6-7](#)
[BSS340NWH6327XTSA1](#) [MCM3400A-TP](#) [DMTH10H4M6SPS-13](#) [IPS60R1K0PFD7SAKMA1](#) [IPS60R360PFD7SAKMA1](#)
[IPS60R600PFD7SAKMA1](#) [IPS60R210PFD7SAKMA1](#) [DMN2990UFB-7B](#)