


SPECIFICATIONS

Current Rating: 1.0 Amps
 Withstanding Voltage: AC 500V
 Insulation Resistance: 1000MΩ Min
 Contact Resistance: 20 mΩ Max
 Operation Temperature: -40 ° to+105 °
 Insulator Material: Polyester (UL94V-0)
 Contact Material: Phosphor bronze
 Standard: PA6T
 Contact Plating: Gold Flash
 Max. Processing Temp: 240 ° C for 30-60 seconds
 (260 ° C for 5 seconds)

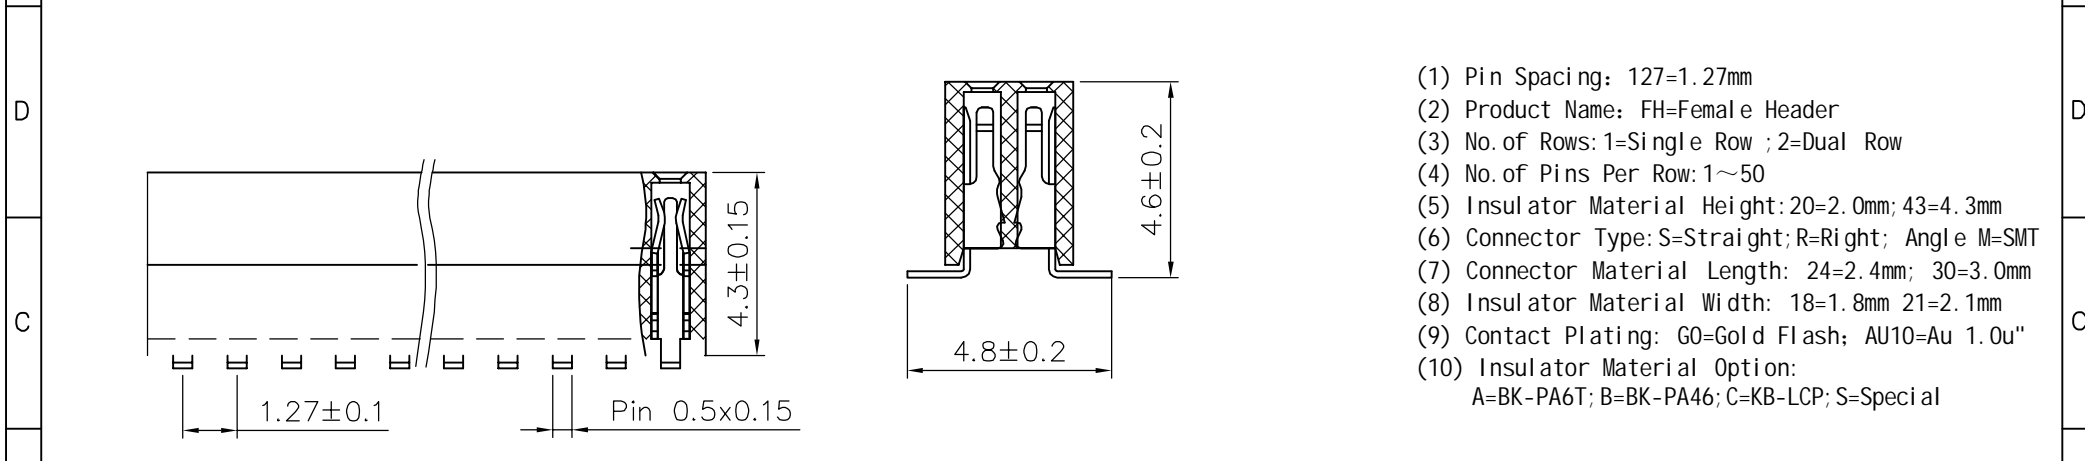

- (1) Pin Spacing: 127=1.27mm
- (2) Product Name: FH=Female Header
- (3) No. of Rows: 1=Single Row ; 2=Dual Row
- (4) No. of Pins Per Row: 1~50
- (5) Insulator Material Height: 20=2.0mm; 43=4.3mm
- (6) Connector Type: S=Straight; R=Right; Angle M=SMT
- (7) Connector Material Length: 24=2.4mm; 30=3.0mm
- (8) Insulator Material Width: 18=1.8mm 21=2.1mm
- (9) Contact Plating: G0=Gold Flash; AU10=Au 1.0u"
- (10) Insulator Material Option:
 A=BK-PA6T; B=BK-PA46; C=KB-LCP; S=Special

深圳市金航标电子有限公司		WWW.BDS666.COM		No. of		DIM. A		DIM. B		No. of		DIM. A		DIM. B		No. of		DIM. A		DIM. B													
KH-1.27FH-2X2P-H4.3-SMT		0755-83044319		1		—		—		11		12.70		13.97		21		25.40		26.67		31		38.10		39.37		41		50.80		52.07	
				2		1.27		2.54		12		13.97		15.24		22		26.67		27.94		32		39.37		40.64		42		52.07		53.34	
				3		2.54		3.81		13		15.24		16.51		23		27.94		29.21		33		40.64		41.91		43		53.34		54.61	
				4		3.81		5.08		14		16.51		17.78		24		29.21		30.48		34		41.91		43.18		44		54.61		55.88	
				5		5.08		6.35		15		17.78		19.05		25		30.48		31.75		35		43.18		44.45		45		55.88		57.15	
				6		6.35		7.62		16		19.05		20.32		26		31.75		33.02		36		44.45		45.72		46		57.15		58.42	
				7		7.62		8.89		17		20.32		21.59		27		33.02		34.29		37		45.72		46.99		47		58.42		59.69	
				8		8.89		10.16		18		21.59		22.86		28		34.29		35.56		38		46.99		48.26		48		59.69		60.96	
				9		10.16		11.43		19		22.86		24.13		29		35.56		36.83		39		48.26		49.53		49		60.96		62.23	
				10		11.43		12.70		20		24.13		25.40		30		36.83		38.10		40		49.53		50.80		50		62.23		63.50	

UNLESS OTHERWISE SPECIFIED TOLERANCE
 X : ±0.3 X° : ±5°
 X.X : ±0.2 X.X° : ±1°
 X.XX : ±0.1 X.XX° : ±0.5°

DRAWM NAME 1.27FH 2xnPin H4.3 SMT

SIZE	A4	SCALE	N: 1	PROJECT NO.	
REV	A	UNIT	mm	PROJECT	

DRAW: LI BEI LIN 12/03/07 CHECKED: / / APPROVED: / /

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Kinghelm](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [M90C108951C](#)
[70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [80.063.4001.1](#)
[800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-024-10-](#)
[001000](#) [803-93-012-10-001000](#)